KNX Catalogue

Plan for intelligent Future Safety

Building Control Systems



Schneider Electric

Efficiency is the success factor in modern buildings



Contemporary building control has got to be easy and intelligent

Table of Contents

KNX - Intelligent Building	4
New products at a glance	24
eConfigure Software	47
Power Supplies Overview	48
System Components	49
Energy Management	59
Interfaces/Gateways	61
Wiser for KNX	64
space LYnk	66
BMS IP Gateway	68
Hybrid Module	69
Control and Display Devices	70
Access Control	76
Push-Buttons	78
Binary Inputs Overview	120
Binary Inputs	122
Movement/Presence Detectors Overview	126
Movement Detectors	130
Presence Detectors	135
Special Sensors	145
Switch Actuators Overview	156
Switch Actuators	160
Blind Actuators Overview	180
Blind Actuators	182
Blind Switch Actuators	188
Hybrid Actuators	192
Dimming Actuators Overview	200
Dimming Actuators/Control Units	204
DALI	215
Special Acuators	219
Room Temperature Control Units	220
Accessories	241
Index	242



KNX combines current requirements into one system

KNX is the intelligent building control system for all areas in which your customers live and work. From single-family houses to office complexes, the comprehensive portfolio of KNX solutions from Schneider Electric enables you to achieve flexible, energy-efficient, comfortable and safe solutions that are easy to plan, install and operate.

A KNX system grows with the customers' requirements

Comfort

Everyone nowadays expects more comfort and convenience in their domestic and working lives. What is called for are comfortable solutions that can be operated straightforwardly and without fuss, to make living and working easier.

Cost efficiency

Intelligent networking of all building systems can avoid unnecessary energy consumption and reduce operating costs on a sustained basis. The ability to expand modular KNX system technology ensures economical solutions that are guaranteed to remain tailor-made over the long haul.

Flexibility


In order to allow for flexible room usage over several decades, it is necessary for building functions to be adapted to the users' requirements easily in a cost-effective way – without the need for walls to be opened up and new cables to be laid.

Safety and security

To let residents feel as safe as possible, building technology must be able to react in a fast and intelligent way in any situation and at any time. No matter whether the building is full of life or quiet.

Combining building control with the technologies of the future

KNX combines modern building technologies in one system

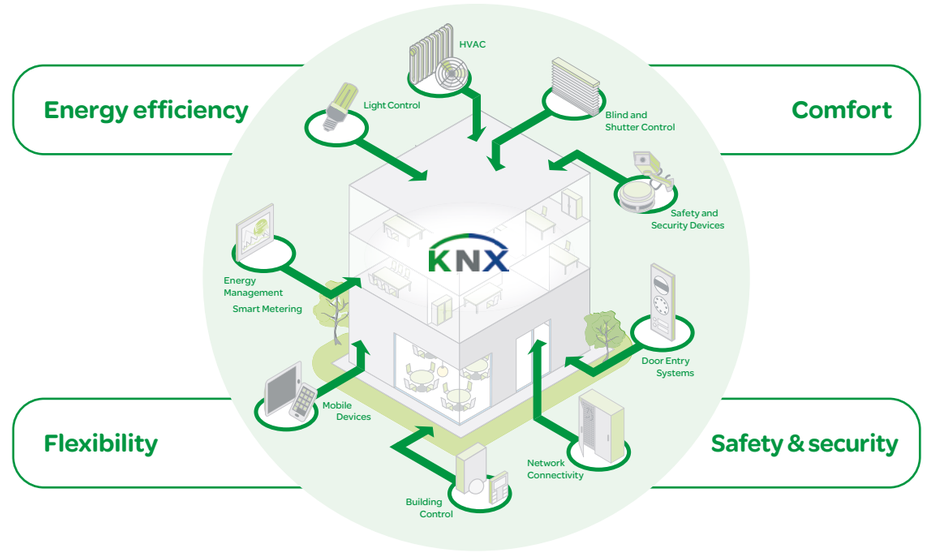









The advantages of modern building control with KNX

KNX offers convincing flexibility and cost efficiency. Whether in new buildings or for retrofitting, in private homes, offices, hotels or public buildings – KNX installations can easily be expanded and adapted again and again to new requirements.

The more extensive the application, the greater the efficiency

Low operating costs

KNX enables the operating costs of a building to be reduced in the long term by only activating loads such as air conditioning, heating and lighting when they are actually needed.
Control is effected automatically by means of time profiles as well as movement and presence detectors, thus leading to significant energy savings in offices and public buildings in particular.

Time savings

By networking all components via a single bus, it is possible to simplify the cable routing, reduce the complexity of the wiring and make the system both clearly comprehensible and easy to expand. The Engineering Tool Software (ETS) makes the planning, installation and configuration of KNX easy, quick and efficient.

Flexibility and expandability

Changes of use are also effortless with KNX. The installation can be adapted to modified requirements or future developments at any time. Additional components can be integrated into the existing bus system without requiring further installation work.

Greater safety, security, comfort and efficiency in all building types

Comfort, safety and security in private homes

In private homes, the priority is on control convenience with high levels of safety and security. KNX conveniently connects different utilities together, realising comfortable solutions that are easy to operate and have intelligent functions for when the residents are not at home. Intelligent light and scene control provides the householders with a good feeling of safety and security – day and night.

Furthermore, the possibilities of KNX do not end at the boundaries of the property. Many functions can also be controlled from mobile devices or PCs by online access.

Flexibility and efficiency in offices and public buildings

Flexibility and cost efficiency are particularly important when it comes to commercial buildings. Due to their large number of differently used areas, offices and public buildings offer plenty of scope for significant energy-savings.

Automated building control can be perfectly adapted to the behaviour of users, and changed at any time in a straightforward procedure without any major expense.





Perfect working conditions

During everyday office activities, KNX solutions facilitate work and save energy – fully automatically. Adapting the lighting, heating and air conditioning to particular situations means that optimum working conditions can be achieved at any time. Unnecessary energy consumption is prevented by ensuring that loads are switched off automatically.

A KNX installation in the office raises the degree of comfort and transparency and saves energy at the same time

Open-plan office

Flexible lighting control

It is a normal situation in open-plan offices that employees do not leave their workplaces at the same time in the evening, but in dribs and drabs. Presence detectors over the desk clusters detect when areas are no longer being used, and then automatically deactivate the lighting. Constant lighting control ensures an ideal lighting situation from morning to evening.

Conference room

Presentation mode at the push of a button

With KNX, it is amazingly easy to prepare a presentation. At the push of a button, the lighting is dimmed in the entire conference room, the blinds and the presentation screen are lowered, the sound system and the beamer are activated, and the heating or air conditioning are set to the required temperature. And if the meeting turns out to be a long one, CO_2 sensors automatically activate the ventilation system.



spaceLYnk



ARGUS presence detector



KNX push-button plus with room temperature control unit



OptiLine





Secure living comfort

In the home, a modern KNX installation increases the quality of life by allowing everyday building functions to be controlled easily, more comfortably as well as more safely and cost-effectively with KNX.

KNX offers various control modes: manual, automatic, or mobile

Entrance area

Greater safety and security with central functions

It gives you a good feeling when you can see at a glance on leaving a building that everything is OK. A Touch Panel in the entrance hall provides an overview of the building status and allows central functions such as the "presence simulation" or "central off". Selected loads such as the lighting or appliances connected to socket-outlets can be integrated in functions of this kind. When the householders are absent, sensors detect storms or excessive sunlight and automatically activate awnings and blinds in the relevant areas as a protective measure.

Living room

Individual living comfort

Whether you plan to spend your evening playing games, watching TV or reading, or to have a cosy get-together with friends – every situation can be enhanced with an individual KNX scene. At the push of a single button, all required functions are activated at the same time: blinds are lowered, mood lighting is switched on and the room is heated or air-conditioned to just the right temperature. At the end of the evening, all functions can be switched off at the push of a button, thus putting the entire home into energy-saving night mode.



SpaceLogic KNX Touch IP 7




KNX push-button plus with room temperature control unit



Flush-mounted movement detector



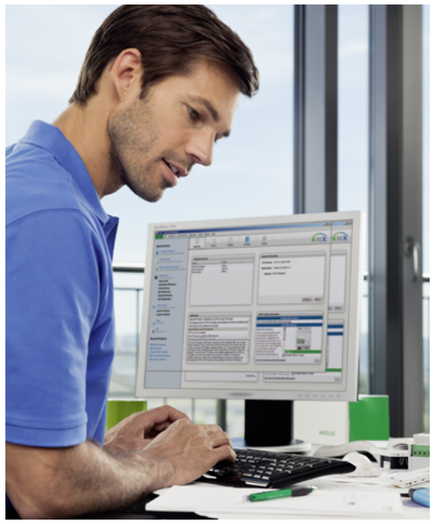



KNX – Technology with future

Systematic building control

As a global standard in building system technology, KNX offers unique advantages for all users. By intelligently linking together distributed system components via a bus system, it is possible to offer not only many more possibilities than in a conventional installation but also significant potential in the areas of energy efficiency, safety, security and comfort.

KNX guarantees that all components are compatible

Future-proof industry standard

KNX is the world's open standard for house and building system technology. In Europe, KNX is established in the EN 50491 and CEN EN 13321-1 and 13321-2 standards, and internationally by the ISO/IEC 14543-3 standard. In China, it corresponds to the GB/Z 20965 standard, and in the USA to the ANSI/ASHRAE 135 standard. KNX is thus a globally a globally valid as well as applied standard. All KNX products from all manufacturers are certified by the KNX association. This means all components are guaranteed to be compatible and future-proof, across all manufacturers. The Engineering Tool Software (ETS) simplifies the tasks of project planning and commissioning of all KNX-certified products.

A successful system in figures

The total of around 300 members in 33 countries speaks for itself. At present, there are more than 7,000 certified product groups, and about 70,000 projects have been implemented to date. This corresponds to more than 15 million installed KNX products. Today, there are already more than 30,000 ETS users who have been trained in one of the 150 training centres worldwide. Training and development of KNX are supported by 60 partners from the business and training establishments.

A strong partner for KNX solutions

Schneider Electric, the global specialist for energy-efficient solutions, offers a complete assortment of KNX products – from the strong design of the control interface through to all necessary DIN rail system components. All energy-saving solutions can be harmonised with one another in order to compose the right system for every need.

The intelligent bus principle


In conventional electrical installations, the control functions are mostly carried over the load cables. This means each function needs its own control cable. The intelligent solution is achieved by the installation bus which carries all the control signals in a building, thus making subsequent changes easy to implement.

Simply intelligent: an installation bus carries all control signals within a building


One bus for maximum flexibility

As part of a conventional electrical installation, it is necessary to specify how and where household systems are to be controlled prior to the building work. A KNX installation is flexible, because all functions can be changed and expanded at any time.

The two-wire installation bus routed in parallel to the 230 V electrical power supply connects all devices and systems of the household technology together, and transmits all the control signals. This is based on fast transmission rates with the highest levels of immunity to interference.

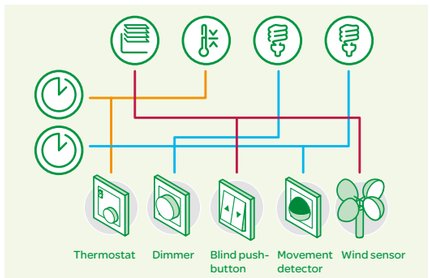

The conventional solution:
many separate lines, meaning less flexibility

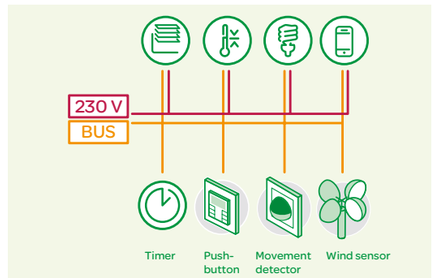

The intelligent KNX solution:
the bus carries out all control functions for maximum flexibility







The system components

All the devices for a KNX installation are connected together by a bus, thus allowing them to exchange data. The function of the individual bus devices is determined by their project planning, which can be changed and adapted at any time.

A KNX system is modular and flexible

System devices and components

They are needed for the fundamental functioning of the system. They consist of power supply units for generating bus voltage, couplers for connecting bus segments and interfaces for connecting programming devices.

Sensors

These are the starting point for every action, because they gather information and send it on the bus as a data telegram. This can be information about room temperatures, movements, wind measurements or manually input instructions.

Actuators

They receive data which are then converted into actions. This can include controlling blinds, dimming lights or controlling heating and air conditioning systems.



System devices (selection)



Power supply unit · KNX logic module · USB interface REG-K · Line coupler · SpaceLogic KNX IP Router · Wiser for KNX

Sensors (selection)



KNX push-button · Movement detector · Room temperature control unit · Binary input · Anemometer

Actuators (selection)



Switch actuator · Dimming actuator · Heating actuator · Blind actuator · KNX DALI-Gateway

Energy Efficiency with KNX

Energy saving is not just a matter of conviction but is also a cost factor that puts money in your customers' pockets. KNX offers the optimum basis for energy efficiency and can be expanded with additional components as required.



Energy Saving
just by visualising
consumption

Comprehensive energy management

Schneider Electric – leading supplier of energy management solutions – offers a large scope of energy solutions which can be perfectly combined KNX Touch IP 7. And all of this is from a single source, so compatibility is assured. LifeSpace Management is a comprehensive solution that you can adapt to each customer's individual situation.

Measuring and visualising – the first step to savings

Energy efficiency starts with the clear visualisation of all energy consumption values. Studies have shown that simply visualising energy consumption values prompts users to change their behaviour – with a potential saving of up to 10%!



SpaceLogic KNX Touch IP 7

Saving and evaluating energy data

The energy data can be measured and recorded, and then displayed as graphs. The longer the time frame of energy recording, the more precisely a building can be evaluated in terms of energy.

Devices with a high energy consumption can easily be identified, and their consumption can be immediately optimised.

Improvement starts with a decision about what to measure

The trump card of LifeSpace Management is flexibility. For each requirement, Schneider Electric offers solutions for achieving individual energy efficiency concepts and energy saving scenarios. The combination of switch actuators with current detection or KNX Energy Meter plus individually set switching times helps your customers to save energy.

Monitoring with high accuracy

The KNX Energy Meter provides energy measuring with class 1 accuracy for single and groups of devices. It measures total and period energy as well as instant power and provides 8 different alarm thresholds. When consumption exceeds preset limit, commands for switching or dimming can be sent or KNX scenes can be activated. The commands can be provided with adjustable delays if needed. Alarms can be sent to Touch IP 7 as well in case of current power, e.g. if server cooling falls below preset limits.




KNX and Modbus: an intelligent combination

The KNX Metering Gateway combines the expertise of the Modbus open standard with KNX intelligent building control. Measured values of up to 10 meters with a Modbus interface and connected SIM modules for recording gas and water consumption via impulse can be integrated into the KNX Energy Management, thus enabling comprehensive analysis of consumption.



Application Example

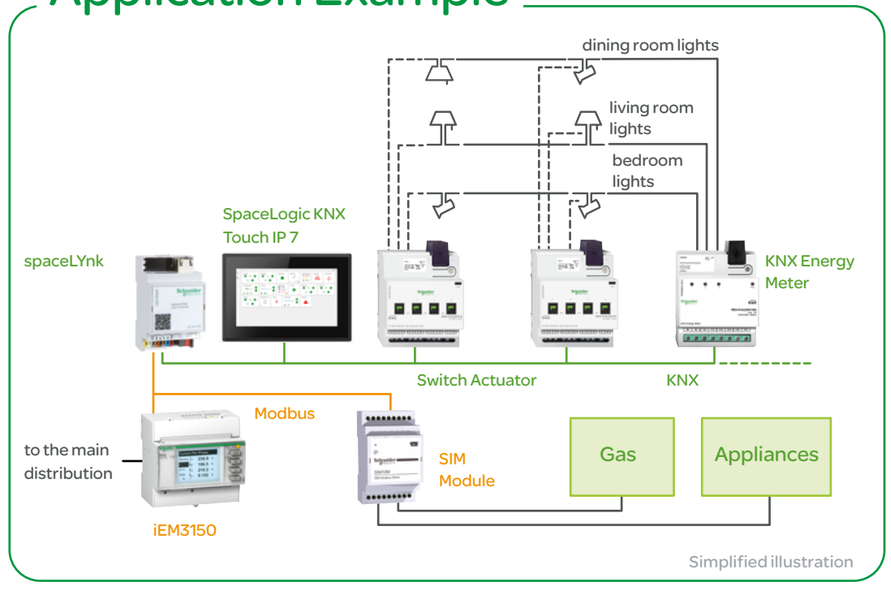

Become the building manager for your customers

Flexibility for today and tomorrow

There is a great desire for flexibility in both privately and commercially used properties alike. Demands change, and this has effects on the existing electrical installation. On such occasions in particular, it is good to be able to benefit from the advantages of flexible building control.

KNX configurations can be changed easily and inexpensively

Flexibility right from the start

Even during the planning of a new building, KNX offers the greatest possible flexibility for future room use. In this way, for example, meeting rooms can be designed for different forms of use – from conference through to presentation mode. It is easy to reconfigure individual KNX scenes, even when individual employees change locations.

Changing the use of rooms and floors

Whether a private home, an office complex or a hotel – the KNX structure can be adapted and expanded in response to changes of use or modified partition positions without requiring new installation cables. This applies to retrofitting individual functions just as much as creating new central functions. Functional buildings with a KNX installation are especially attractive because it is easy to gear them up for new requirements; consequently, they remain straightforward to let or sell. Thanks to the comfortable configuration with ETS, it is quick, easy and inexpensive to make changes of function – from the single room to the entire office floor.










Profitability for your customers

Factors that are decisive for the cost efficiency of a KNX installation include the ongoing operational costs and, in particular, the investment costs, compared to conventional systems. The required range of functions is quite decisive in this case, because KNX will very quickly make itself pay if the functions go beyond those possible from a conventional solution.

With KNX, it is possible to save up to 30% operating costs in the long term

When it comes to a comparison between the investment costs of a KNX system and those of a conventional installation, what counts is the required range of functions. Often, even simple scene functions can be implemented more cost-effectively with KNX than on a conventional basis. One aspect to remember with regard to investment costs concerns the lower operating costs. As time goes by, building management requirements will change: private homes will be inhabited by several generations, rooms in commercial objects are put to different uses in their lifetime due to reorganisation or new tenants. Whereas a change of use or an expansion of a conventional installation is complicated and expensive, the flexibility of a KNX system pays off due to the minimum level of complexity. KNX opens the door to many possible savings in terms of a building's operating costs. From demand-related lighting control to energy management, the potential savings are determined by the depth of use.

Efficient and profitable for your customers

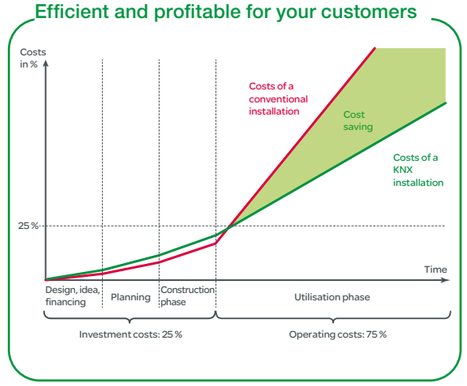



Intuitive user interfaces

The familiar KNX system devices, actuators and sensors are now complemented by the new KNX Multitouch Pro and KNX Push-button Pro – two new user interfaces that provide more functions and flexibility than a conventional range of multi-function push-buttons. They are also easy to install and commission, saving you valuable time.

In touch with comfort

The new KNX Multitouch Pro and Pushbutton Pro user interfaces are the perfect addition to modern KNX installations. They feature a high-quality design that sits perfectly flush in D-Life frames and an operating interface that has a similar look and feel to that of a smartphone or tablet. Incorporating innovative technology, this range delivers the ultimate in convenient operation and flexible control for room comfort functions.



KNX Multitouch Pro and
KNX Push-button Pro,
D-Life Metal, nickel metallic

KNX Multitouch Pro




The new KNX Multitouch Pro stands out thanks to its exceptional design. Its function control is similar to that of a smartphone or tablet. Swiping is used to achieve simple and intuitive switching between eight possible main functions. The unit offers a choice of two interface designs, vertical or rotary, which can also be used in combination.

Special product features:


- Proximity sensor: Display illumination is activated automatically upon approach
- Gesture function: controls one previously defined function using a particular gesture
- Customizable screen saver



Swipe to switch between main functions



**Lighting control –
in rotary display mode**
Uses a control-dial look and feel



**Lighting control –
in vertical display mode**
Enables control of two functions per display

KNX Push-button Pro




High-quality design and intuitive operability – the new KNX Push-button Pro concentrates on what is essential.
The individual touch-sensitive zones of the sensor cover are shown using illuminated function icons that shine through the translucent surface and emphasize the high-quality look of the new push-button.

The sensor cover is available in in all the System D colors.
Up to four light, shutter and scenario functions can be controlled using the KNX Push-button Pro. This means that, in combination with the KNX Multitouch Pro, it offers the perfect solution for intuitive and flexible room control at home or in commercial spaces.

Customizable

The foil set included with the KNX Push-button Pro interface allows you to clearly and professionally label basic functions. A blank carrier foil can also be used to add individual symbols as required.

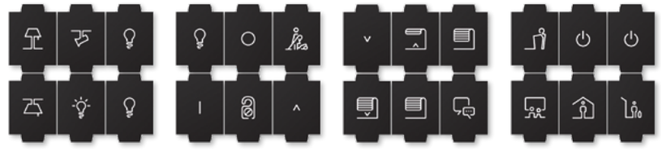

Individual symbols for use with carrier foil


Installation and commissioning

The new KNX user interface range offers a completely new approach to planning, commissioning and installation. Simpler, faster and more flexible.

Features that you and your customers will love

In the past, all KNX functions had to be pre-defined before installation. Now the new KNX user interface makes planning simpler. Only two references are required for a simple KNX installation in all rooms, based on the number of required functions. The allocation of desired functions can be implemented at the time of commissioning.

An express commissioning feature enables rapid project design. Frequently used functions are predefined in the ETS application. The allocation of desired functions can be modified at any time with no risk of losing group addresses. The KNX Multitouch Pro and KNX Push-button Pro do not require an additional power supply.

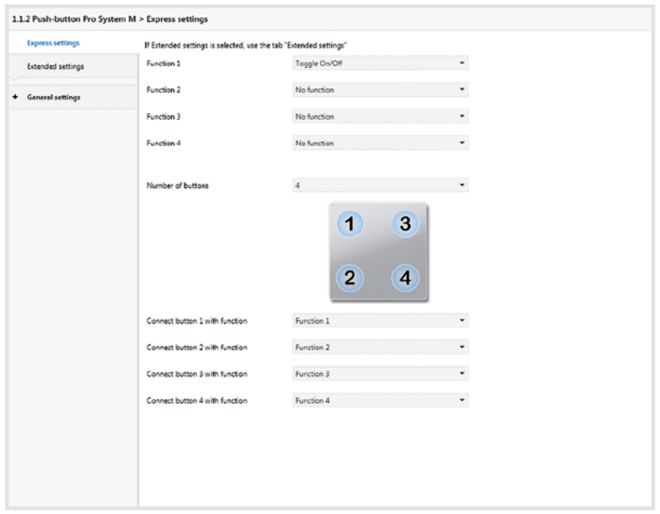

ETS express settings for the KNX Push-button Pro.

Flexible in every detail

At Schneider Electric, comfort, safety, security and flexibility are combined with an extensive variety in design and function. Customers' wishes can be met easily, from the movement detector to the touch panel.

Example: Merten System M

KNX push-buttons


KNX push-button 4-gang plus with room temperature control unit


KNX push-button 2-gang plus with room temperature control unit


KNX push-button 1-gang plus


KNX push-button 2-gang plus


KNX push-button 4-gang plus


KNX push-button 4-gang plus with IR receiver

Push-button modules


Push-button 1-gang


Push-button with 1/0 imprint 1-gang


Push-button 2-gang


Push-button with 1/0 imprint and up/down arrows 2-gang

KNX Movement and presence detectors


KNX ARGUS movement detector 180, flush-mounted


KNX ARGUS movement detector 180/2.20, flush-mounted


KNX ARGUS presence detector, flush-mounted

Example: Unica

KNX push-buttons



KNX push-button



KNX push-button with IR receiver



KNX push-button, 2-gang



KNX room temperature control unit

KNX Movement and presence detectors



KNX movement detector

Example: Altira

KNX push-buttons



KNX push-button



KNX push-button with IR receiver



KNX push-button, 2-gang



KNX room temperature control unit

KNX Movement and presence detectors



KNX movement detector

New products at a glance

Hybrid Module



SpaceLogic KNX Hybrid Module

Version	Art. no.	
white	**LSS100400**	**New**

The Hybrid Module integrates ZigBee wireless devices from Wiser™ offer to an installation that is realized with the controller Wiser for KNX (LSS100100) or spaceLYnk (LSS100200). The user is then able to control Wiser™ devices from their KNX installation and control KNX devices from their Wiser™ devices. The Hybrid Module and its configuration plugin is designed for residential and commercial installations.

The Hybrid Module is powered by separate 24 V power supply and connected to the controller via RS232 communication interface. Once the ZigBee devices are paired with the controller, they are mapped in KNX objects and can be used like any other KNX device. Moreover when Wiser for KNX is used, the wireless devices can be controlled via the Wiser KNX app (Wiser KNX App, available in specific countries).

Because the list of Wiser devices is constantly growing, please visit https://www.go2se.com/ref=LSS100400 in order to refer manual for latest supported device list. The supported devices may vary depending on the country.

Features:
- Hybrid Plugin is available on Marketplace always up to date
- Easy integration and configuration of ZigBee wireless devices
- Automatic upgrade of the firmware of the Hybrid Module and connected ZigBee wireless devices so the installation is always well maintained and up to date

Supply voltage: DC 24 V
Display elements: LED bicolor (Red/Orange)
Interfaces: Antenna, RS232 communication (TX, RX, GND) and DC 24 V power supply(-/+)
Ambient temperature operation: 0°C to +45°C
Device width: 1 modules = approx. 18 mm

Antenna
Transmitting frequency: 2405 MHz ... 2480 MHz
Transmitting power: max. +10 dBm (10 mW)
Cable length: 3 m

Scope of delivery: SpaceLogic KNX Hybrid Module, SpaceLogic KNX Hybrid Antenna LSS100410



SpaceLogic KNX Hybrid Antenna



Version	Art. no.	
black	**LSS100410**	**New**

Spare part.

Hybrid Antenna for connection to the SpaceLogic KNX Hybrid Module. The antenna is placed outside the cabinet. With magnetic base.

Transmitting frequency: 2405 MHz ... 2480 MHz
Transmitting power: max. +10 dBm (10 mW)
Cable length: 3 m

SpaceLogic KNX

New products at a glance

BMS IP Gateway



SpaceLogic KNX BMS IP Gateway



Version	Art. no.	
grey	**LSS100300**	**New**

The SpaceLogic KNX BMS IP Gateway is a bidirectional multifunctional device that allows integration of Spacelogic KNX installations within Ecostruxure Building Operation. The main communication interface is KNX TP with BAC protocol.

The device combines three functions in one device:
- KNX IP router (max. 500 objects)
- KNX IP interface
- DPSU choke power supply

The Gateway is designed for commercial installations and certified by BTL as Application Specific Controller (B-ASC) which ensures 100% compatibility, and at the same time, guarantees a seamless integration with any BACnet device.

Features:
- Number of BACnet objects: 4,000
- Number of BACnet subscriptions (COV) requests: 4,000
- KNX group objects: 4,000
- KNX IP routing objects: 500
- KNX IP Secure compatibility
- KNXP IP tunneling, commissioning of KNX devices, long frame support
- HTTP / HTTPS / NTP servers
- Direct import of *knxproj file with automatic filtering tables

Power supply voltage: DC 12 V - 30 V SELV
Power consumption: 2 W
Power Supply DPSU choke: DC 21 V - 31 V SELV
DPSU choke: rated current max. 320 mA, chort circuit proof, tripping current ≤1A
Display elements:
- **LED indicator 1:** Green LED (CPU load)
- **LED indicator 2:** Green LED (Operation) or Red LED (Reset)
Controls: 1x reset button, 2 jumpers (PoE and POW)
Interfaces: 1x RJ45 Ethernet 10/100 Mbit/s
Terminals:
- **KNX bus:** Bus terminal 2 x 0.8 mm
- **Power supply/Power supply DPSU choke:** 2-gang/3gang pluggable screw terminal for max. 2x 0.5 mm²–1.5 mm²
Protection type: IP20
Ambient temperature operation: 0°C to +45°C
Device width: 4 modules = approx. 72 mm
BACnet Protocol Revision: 22
BACnet Device Profile: B-ASC, B-GW

Trademark Notice
BACnet is a registered trademark of ASHRAE. Other brands and registered trademarks are the property of the relevant owner.

New products at a glance

Control and display devices





SpaceLogic KNX Touch IP 7





Version	Art. no.	
white	**MTN6260-7770**	**New**
black	**MTN6260-7760**	**New**

The SpaceLogic KNX Touch IP 7 inch is a touch screen used to display the visualization from Wiser for KNX or spaceLYnk logic controllers. It can be installed in both Residential and Commercial buildings and in new or existing KNX installations.

The touch panel can display the widget-based Touch visualization or the PC/Tablet visualization with the possibility of realistic graphics. It can also display the new Wiser KNX App, in case the user would like to control their KNX installation in a similar way as from his Smartphone.

All interaction with the touch panel is very easy and efficient, adapted to the needs of the modern concept of smart homes and buildings. The installation can be done horizontally or vertically allowing landscape or portrait mode.

The touch panel is equipped with an embedded application, making the configuration easy and fast. Thanks to WiFi connectivity the installation of touch panel is easier and provides a freedom in choosing of installation location.

An over the air update (OTAU) feature available in the touch panel keeps the solution always up to date and secure. The Touch Panel can be installed surface mounted, anywhere were there would be a 24 V cables to power it.

TouchPanel
Screen diagonal: 17.47 cm (7")
Resolution: 1024 x 600
Type: Colorful TFT LCD & multi-touch capacitive screen

Horizontal orientation
Vertical top / bottom viewing angle: 30° / 70°
Horizontal right / left viewing angle: 70° / 70°

Vertical orientation
Vertical top / bottom viewing angle: 70° / 70°
Horizontal right / left viewing angle: 30° / 70°

Power
2-wire power supply: DC 24 V
Current consumption in standby state (mA): 90 mA
Current consumption in activestate (mA): 240 mA

Wi-Fi®
Frequency band: IEEE 802.11 a/b/g/n/ac 2.4/5 GHz (2400-2483.5 MHz, 5150-5250 MHz)

Environmental conditions
Operating temperature: -10 °C to +55 °C
Operating Humidity: 0% to 95% RH no condensing
Storage temperature: -25 °C to +70 °C
Storage humidity: 0 % to 95 % RH no condensing
IP rating: IP30

Dimensions and weight
Dimensions (W x H x D): 132.76 x 196.65 x 23.91 mm
Weight: 448 g / 814 g (with package)

Location

When choosing the installation location, the maximum cable length must be observed.
The following shows the lengths from the touch panel to the respective assemblies in the system.

- YR 2x0.8 mm, J-Y(ST)Y 2x2x0.8 mm, A-2Y(L)2Y 2x2x0.8 mm: cable must not be longer than 120 m.
- A-2Y(L)2Y 2x2x0.6 mm, J-Y(ST)Y 2x2x0.6 mm: cable must not be longer than 80 m.

SpaceLogic KNX

New products at a glance

Push-buttons



SpaceLogic KNX 4" Touch Unit





Version	Art. no.	
glass	**MTN6215-0410**	**New**

The 4" Touch unit is a room controller designed to be the center of the smart home. Premium materials and a high-quality display with built-in sensors offer a wide range of applications.

The slim design of the product fits perfectly into the modern concept of today's smart installations and architecture. The product can be used in both residential and commercial projects. The product has a modern, seamless user interface that provides an immersive experience every time it is used, with the display waking up simply by moving closer thanks to the proximity sensor.

The display has up to 9 screens that can display individual functions as widgets. This allows you to have different combinations of up to 6 widgets on each screen and effectively control all connected systems. You move between screens with a simple swipe, familiar from traditional smartphone use.

User Interface functions:

- Different UI theme style
- Screen saver
- Orientation indicator
- Proximity function triggered by object
- Setting the backlight in normal/night mode
- Setting the appearance of the screen

Main functions


- Brightness dimming
- RGB dimming
- RGBW dimming
- Colour temperature dimming
- Venetian blind position and slat
- Air conditioner control
- Room temperature control
- Ventilation control
- Audio control

HVAC controller functions:

- FCU controller: switching on/off (2-point control), switching PWM (PI control), continuous control (PI control)
- Floor heating controller
- Ventilation controller

General: Scene group function, 8 logic function channels (AND; OR, XOR, threshold comparator, format converter) each with 8 inputs

Power supply from KNX: DC 21-30 V approx. 24 V/3 mA
Auxiliary Power supply: DC 21-30 V approx. 24 V/85 mA
Screen: 10 cm (3.95") LCD, 480 x 480 pixels
Measuring accuracy: ±1 °C at 25 °C
IP protection rating: IP 20
Dimensions WxHxD: 86 x 86 x 32 mm
Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5 and higher.



KNX Push Button Dynamic Labeling, 1-gang



Version	Art. no.	
1-gang	**MTN6191-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling 1-gang is a push button for 2 rockers on which different functions can be set. The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.
ETS device functions:
- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).

There are 2 programming options for the KNX software functions:
- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 1-gang for KNX Push Button Dynamic Labeling MTN6191-6035, MTN6191-6034, MTN6191-6036, MTN6191-6050, MTN6191-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.

SpaceLogic KNX

New products at a glance



KNX Push Button Dynamic Labeling, 2-gang



Version	Art. no.	
2-gang	**MTN6192-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling 2-gang is a push button for 4 rockers on which different functions can be set. The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.
ETS device functions:
- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:


Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).

There are 2 programming options for the KNX software functions:
- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 2-gang for KNX Push Button Dynamic Labeling MTN6192-6035, MTN6192-6034, MTN6192-6036, MTN6192-6050, MTN6192-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.



KNX Push Button Dynamic Labeling, 3-gang



Version	Art. no.	
3-gang	**MTN6193-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling 3-gang is a push button for 6 rockers on which different functions can be set. The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.

ETS device functions:

- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).

There are 2 programming options for the KNX software functions:

- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions


The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 3-gang for KNX Push Button Dynamic Labeling MTN6193-6035, MTN6193-6034, MTN6193-6036, MTN6193-6050, MTN6193-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.

SpaceLogic KNX

New products at a glance



KNX Push Button Dynamic Labeling, universal



Version	Art. no.	
universal	**MTN6194-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling Universal is a push button for 2 to max 8 rockers on which different functions can be set. This flexible structure allows the number of rockers/functions to be adapted to changing requirements.
The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.

ETS device functions:

- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).

There are 2 programming options for the KNX software functions:

- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 1-gang for KNX Push Button Dynamic Labeling MTN6191-6035, MTN6191-6034, MTN6191-6036, MTN6191-6050, MTN6191-6052
Rocker 2-gang for KNX Push Button Dynamic Labeling MTN6192-6035, MTN6192-6034, MTN6192-6036, MTN6192-6050, MTN6192-6052
Rocker 3-gang for KNX Push Button Dynamic Labeling MTN6193-6035, MTN6193-6034, MTN6193-6036, MTN6193-6050, MTN6193-6052
Rocker 4-gang for KNX Push Button Dynamic Labeling MTN6194-6035, MTN6194-6034, MTN6194-6036, MTN6194-6050, MTN6194-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.

Rocker 1-gang for KNX Push Button Dynamic Labeling

Version	Art. no.	
☐ lotus white	**MTN6191-6035**	**New**
■ anthracite	**MTN6191-6034**	**New**
■ stainless steel	**MTN6191-6036**	**New**
■ nickel metallic	**MTN6191-6050**	**New**
■ mocca metallic	**MTN6191-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, 1-gang MTN6191-6010, KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 1x rocker 1-gang.

New products at a glance

Rocker 2-gang for KNX Push Button Dynamic Labeling



Version	Art. no.	
lotus white	**MTN6192-6035**	**New**
anthracite	**MTN6192-6034**	**New**
stainless steel	**MTN6192-6036**	**New**
nickel metallic	**MTN6192-6050**	**New**
mocca metallic	**MTN6192-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, 2-gang MTN6192-6010, KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 2x rockers 2-gang.

Rocker 3-gang for KNX Push Button Dynamic Labeling

Version	Art. no.	
lotus white	**MTN6193-6035**	**New**
anthracite	**MTN6193-6034**	**New**
stainless steel	**MTN6193-6036**	**New**
nickel metallic	**MTN6193-6050**	**New**
mocca metallic	**MTN6193-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, 3-gang MTN6193-6010, KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 1x rocker 2-gang, 2x rockers 4-gang

Rocker 4-gang for KNX Push Button Dynamic Labeling



Version	Art. no.	
lotus white	**MTN6194-6035**	**New**
anthracite	**MTN6194-6034**	**New**
stainless steel	**MTN6194-6036**	**New**
nickel metallic	**MTN6194-6050**	**New**
mocca metallic	**MTN6194-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 4x rockers 4-gang.

SpaceLogic KNX

New products at a glance

Push-buttons UNiCA



Unica KNX push-button, 2 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16161_01BK_E1**	**New**
wine gold	**NP16161_01WG_E1**	**New**
silver	**NP16161_01SL_E1**	**New**

Push-button with 2 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

New products at a glance



Unica KNX push-button, 4 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16162_01BK_E1**	**New**
wine gold	**NP16162_01WG_E1**	**New**
silver	**NP16162_01SL_E1**	**New**

Push-button with 4 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

New products at a glance



Unica KNX push-button, 6 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16163_01BK_E1**	**New**
wine gold	**NP16163_01WG_E1**	**New**
silver	**NP16163_01SL_E1**	**New**

Push-button with 6 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

New products at a glance



Unica KNX push-button, 8 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16164_01BK_E1**	**New**
wine gold	**NP16164_01WG_E1**	**New**
silver	**NP16164_01SL_E1**	**New**

Push-button with 8 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

New products at a glance



Unica KNX push-button, 5 key plus thermomstat



Version	Art. no.	
Thermoplastic		
dark grey	**NP16212_01BK_E1**	**New**
wine gold	**NP16212_01WG_E1**	**New**
silver	**NP16212_01SL_E1**	**New**

Push-button with thermostat, display and 5 operating buttons with status indicators. With an integrated temperature sensor for temperature measurement. The thermostats supports Fan Coil Units (FCU), Variable Refrigerant Flow systems (VRF), floor heating systems and ventilation.
The display shows all relevant information for room temperature control e.g. the actual temperature, heating/cooling status, ventilation, ...
The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Display settings: temperature unit, brightness level, standby adjustment
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor: Calibration and sending behavior

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Power on/off of the device, control mode/operation mode (to call with short/long button press), Fan speed, Temperature +/-, Function page, Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.

Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.

HVAC settings: FCU or VRF controller, floor heating and ventilation.

FCU: Heating and/or cooling mode, room temperature can be taken as reference from the internal sensor, an external sensor or a combination of both. Implementation of a window contact. Setpoint adjustment.

VRF: Heating and/or cooling mode, dehumidifaication mode, fan mode, auto mode, fan speed adjustment, setpoint.

Floor heating: Setpoint, PI control, PWM or switching 2-point feedback control, setpoint adjustment

General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function, support of CO2 sensor, monitoring of further sensors.

Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

New products at a glance



Unica KNX push-button, 8 key plus thermomstat



Version		Art. no.	
Thermoplastic			
■	dark grey	**NP16214_01BK_E1**	**New**
■	wine gold	**NP16214_01WG_E1**	**New**
■	silver	**NP16214_01SL_E1**	**New**

Push-button with thermostat, display and 8 operating buttons with status indicators. With an integrated temperature sensor for temperature measurement. The thermostats supports Fan Coil Units (FCU), Variable Refrigerant Flow systems (VRF), floor heating systems and ventilation.
The display shows all relevant information for room temperature control e.g. the actual temperature, heating/cooling status, ventilation, ...
The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Display settings: temperature unit, brightness level, standby adjustment
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor: Calibration and sending behavior

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Power on/off of the device, control mode/operation mode (to call with short/long button press), Fan speed, Temperature +/-, Function page, Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.

Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.

HVAC settings: FCU or VRF controller, floor heating and ventilation.

FCU: Heating and/or cooling mode, room temperature can be taken as reference from the internal sensor, an external sensor or a combination of both. Implementation of a window contact. Setpoint adjustment.

VRF: Heating and/or cooling mode, dehumidifaication mode, fan mode, auto mode, fan speed adjustment, setpoint.

Floor heating: Setpoint, PI control, PWM or switching 2-point feedback control, setpoint adjustment

General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function, support of CO2 sensor, monitoring of further sensors.

Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

SpaceLogic KNX

New products at a glance



Unica KNX 4.0 inch touch screen





Version	Art. no.	
glass	**NP16260_0104**	**New**

Comfortable room controller with 4 inch touch panel to control up to 54 functions and the room temperature.
All functions are displayed on up to 9 touch screens and called up with simple finger movements. The touch screen is customizable, e.g. the user can choose between 3 theme styles, different screen savers, 43 predefined icons and 35 individual icons.
The proximity can be triggered by an object (presence detector) and can also be sent, e.g. to trigger another action or for visualization.
An FCU controller, a floor heating controller and a ventilation controller are available as HVAC controllers.

ETS device functions:
- On/Off behavior of the user interface
- Proximity function triggered by object
- Setting the backlight in normal/night mode
- Setting the appearance of the screen

With integrated bus coupler. The bus is connected using a bus connecting terminal.

Functions, control unit/push-button:
- Dual-surface: switch, brightness dimming, curtain step/move, roller blind step/move, scene, value output, loop operation, multiple operation, weather information, energy monitoring
- Single-surface: switch, scene, value output, loop operation, multiple operation, weather information, energy monitoring, air quality display
- With only one function of the screen: brightness dimming, RGB dimming (1 x 3 byte, 3 x 1 byte), RGBW dimming (1 x 6 byte, 4 x 1 byte), Colour temperature dimming, venetian blind position and slat, air conditioner control panel (setpoint/actual temperature, internal/external sensor), room temperatur control panel, ventialtion control panel, audio control (volume adjustment, play mode, 3 play modes)

Functions of the room temperature control unit:
- FCU controller: switching on/off (2-point control), switching PWM (PI control), continuous control (PI control)
- Floor heating controller
- Ventilation controller

General: Scene group function, 8 logic function channels (AND; OR, XOR, threshold comparator, format converter) each with 8 inputs, indication behaviors

Note: Programmable with ETS5 and higher.

Actuators



SpaceLogic KNX Hybrid Switch Actuator REG-K/4x250/10 with manual mode



Version	Art. no.	
4 channels, white	**MTN6700-0104**	New

For the Chinese market.

For independent switching of 4 loads or for controlling up to 2 blinds/roller shutters, 1 fan coil with 3 levels, two 2-pipe valve controls or one 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 9 mA, maximum 20 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 300 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 2x 6-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 320 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 72x90x64 mm

Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

New products at a glance



SpaceLogic KNX Hybrid Switch Actuator REG-K/8x250/10 with manual mode



Version	Art. no.	
8 channels, white	**MTN6700-0108**	New

For the Chinese market.

For independent switching of 8 loads or for controlling up to 4 blinds/roller shutters, 2 fan coils with 3 levels, four 2-pipe valve controls or two 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 10 mA max. 22 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 250 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 8 channels: 3x 6-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 192 A/1.2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 72x90x64 mm

Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Hybrid Switch Actuator REG-K/16x250/10 with manual mode

Version	Art. no.	
16 channels, white	**MTN6700-0116**	**New**

For the Chinese market.

For independent switching of 16 loads or for controlling up to 8 blinds/roller shutters, 4 fan coils with 3 levels, eight 2-pipe valve controls or four 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 10 mA max. 26 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 300 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 4x 8-gang


Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 320 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 216x90x64 mm

Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

New products at a glance

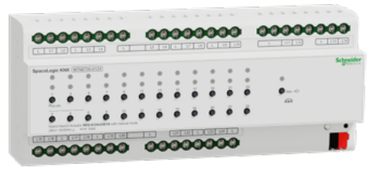

SpaceLogic KNX Hybrid Switch Actuator REG-K/24x250/10 with manual mode

Version	Art. no.	
24 channels, white	**MTN6700-0124**	**New**

For the Chinese market.

For independent switching of 24 loads or for controlling up to 12 blinds/roller shutters, 6 fan coils with 3 levels, twelve 2-pipe valve controls or six 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 12 mA max. 28 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 300 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 5x 8-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 320 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 216x90x64 mm

Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Switch Actuator REG-K/4x250/20 with manual mode

Version	Art. no.	
4 channels, white	**MTN6700-0304**	**New**

For the Chinese market.

The actuator is used for switching 4 loads, or can be used as a 4-channel heating acutator for valves (without heating controller).
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions:
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 6.5 mA, max. 19 mA/24 V
KNX power consumption: < 600 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 20 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 16 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 4000 W
Fluorescent lamp: 4000 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 3000 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 2200 W
LED lamp: 750 W, cos φ ≥ 0.6
Capacitive loads: 20 AX, 200 µF
Motors: 4000 VA, cos φ ≥ 0.6

Minimum switching current: 100 mA/12 V AC
Connection port KNX: Bus connection terminal
Connection port Mains: Screw terminal blocks, 1x8-gang


Relay data
Switching frequency at rated load: for one channel: 60 operations/min
for all channels: 30 operations/min
Mechanical service life: >1x10^6
Inrush current: 500 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Product dimensions (WxHxD): 4 channels: 72 x 90 x 64 mm

Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

New products at a glance



SpaceLogic KNX Switch Actuator REG-K/8x250/20 with manual mode

Version	Art. no.	
8 channels, white	**MTN6700-0308**	**New**

For the Chinese market.

The actuator is used for switching 8 loads, or can be used as a 8-channel heating acutator for valves (without heating controller).
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions:
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 6.5 mA, max. 19 mA/24 V
KNX power consumption: < 600 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 20 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 16 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 4000 W
Fluorescent lamp: 4000 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 3000 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 2200 W
LED lamp: 750 W, cos φ ≥ 0.6
Capacitive loads: 20 AX, 200 µF
Motors: 4000 VA, cos φ ≥ 0.6

Minimum switching current: 100 mA/12 V AC
Connection port KNX: Bus connection terminal
Connection port Mains: Screw terminal blocks, 2x8-gang

Relay data
Switching frequency at rated load: for one channel: 60 operations/min
for all channels: 8 channels 20 operations/min
Mechanical service life: >1x10^6
Inrush current: 500 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Product dimensions (WxHxD): 8 channels: 144 x 90 x 64 mm

Contents: With bus connecting terminal and cable cover.

New products at a glance



SpaceLogic KNX Switch Actuator REG-K/12x250/20 with manual mode

Version	Art. no.	
12 channels, white	**MTN6700-0312**	**New**

For the Chinese market.

The actuator is used for switching 12 loads, or can be used as a 12-channel heating acutator for valves (without heating controller).
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions:
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 6.5 mA, max. 19 mA/24 V
KNX power consumption: < 600 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 20 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 16 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 4000 W
Fluorescent lamp: 4000 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 3000 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 2200 W
LED lamp: 750 W, cos φ ≥ 0.6
Capacitive loads: 20 AX, 200 µF
Motors: 4000 VA, cos φ ≥ 0.6

Minimum switching current: 100 mA/12 V AC
Connection port KNX: Bus connection terminal
Connection port Mains: Screw terminal blocks, 3x8-gang


Relay data
Switching frequency at rated load: for one channel: 60 operations/min
for all channels: 12 operations/min
Mechanical service life: >1x10^6
Inrush current: 500 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2


Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Product dimensions (WxHxD):12 channels 216 x 90 x 64 mm

Contents: With bus connecting terminal and cable cover.

eConfigure Software

Software

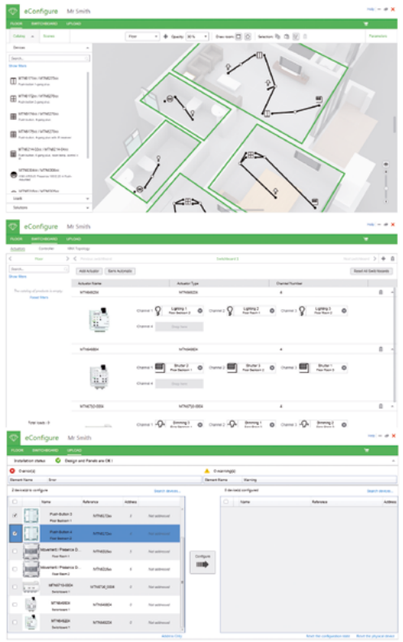

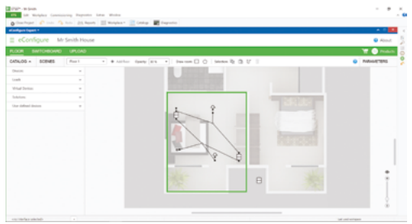

eConfigure KNX Lite



Version	Art. no.
Lite	**LSS900100**

eConfigure KNX Lite is a graphical tool to seamlessly plan and configure a KNX installation in residential and functional buildings. Time-consuming programming via ETS software is no longer necessary. The user creates his installation graphically directly on the plans of his installation and determines the functions of each KNX sensors (pushbuttons, thermostats, detectors, ...) in a simple, fast and intuitive way. KNX products in switchboards are generated automatically, which allows the user to save time, while being assured of a functional installation.

Can be used:
- As a tool for simple, fast and intuitive configuration and setup for building automation solutions based on KNX
- As a product database that contains the catalogue with all available Schneider KNX devices in the country. It is no longer necessary to download the device files.

Features:
- Fast and convenient planning and commissioning thanks to the graphical user interface.
- Allows access to pre-assembled solutions and enables easy configuration of scenes.
- Up to 250 KNX devices can be integrated in a project.
- Automatic generation and product selection of KNX modular devices for the control cabinet layout.
- Fully automatic creation of visualizations in combination with Wiser for KNX and spaceLYnk possible
- Assistant function checks the configuration for sources of error for smooth commissioning.
- Creation of a room book and material lists for simple project documentation.
- Import of eConfigure KNX lite project files into eConfigure KNX expert (-ETS5) possible.
- Compatible operating systems: Windows 7, SP1, Windows 8, Windows 10
- Minimum computer requirements: see operating instructions / user manual.

Compatible operating system: Windows 7 SP1, Windows 8, Windows 10
Minimum computer requirements: Refer to user manual.
List of compatible KNX products: Refer to user manual
Automatic creation of visualizations for smartphone, tablet and Touch IP 7 in connection with Wiser for KNX (LSS100100) or spaceLYnk (LSS100200) possible.
Note: This software must be installed on a computer using the Windows® operating system.
Scope of delivery: Box with KNX dongle and USB stick with software.

eConfigure KNX Expert



Version	Art. no.
Expert	**Available on knx.org shop (ETS App)**

'eConfigure KNX Expert' is a graphical ETS App for seamless configuration and set-up of a home & building automation solutions.

The user creates his installation graphically directly on the plans of his installation and determines the functions of each KNX sensors (pushbuttons, thermostats, detectors, ...) in a simple, fast and intuitive way. KNX products in switchboards are generated automatically, which allows the user to save time, while being assured of a functional installation.

A library of solutions can be integrated in the software, allowing the novice or experienced user who wants to optimize his time to quickly create his project. It is also possible for the user to create his own solutions.

An installation report and list of products (bill of materials) can also be edited to allow the user to build a complete and professional file for the rest of his team or for his own clients.

All projects done with the Lite version are compatible with the Expert version.
It is possible to export the complete project in ETS.

Compatible operating system: Windows 7 SP1, Windows 8, Windows 10
Minimum computer requirements: Refer to user manual.
List of compatible KNX products: Refer to user manual
Note: ETS5 with Pro license shall be used.

Power Supplies Overview

	SpaceLogic KNX power supply REG-K					SpaceLogic KNX power supply REG-K with emergency power input	
							
Article number	**MTN684032**	**MTN684064**	**MTN6513-1203**	**MTN6513-1202**	**MTN6513-1201**	**MTN683832**	**MTN683890**
Output current	320 mA	640 mA	320 mA	640 mA	1280 mA	320 mA	640 mA
Maximum number of bus devices	64	64	256		256	64	64
Input voltage, 50-60 Hz	AC 110-230 V		AC 220-240 V		AC 220-240 V	AC 110-230 V	
Output voltage	KNX: DC 28-31 V		KNX: DC 28-31 V Additional output: 30 V DC		KNX: DC 28-31 V Additional output: 30 V DC	KNX: DC 28-31 V	
Device width (1 module = 18 mm)	4 modules		4 modules		6 modules	4 modules	
Connections and displays							
LED display for maximum current	■		■		■	■	
Reset switch	■		■		■	■	
Signalling contact	—		■		■	—	
Increase the rated current in the bus line	—		max. 2 identical devices can be connected in parallel		—	—	
Connection for SpaceLogic KNX REG emergency power supply art. no. MTN683901	—		—		—	■	

System Components

Bus voltage supply





The current product database can be obtained from the Internet at http://www.schneider-electric.com.

SpaceLogic KNX Power Supply 320 mA



Version Art. no.

MTN6513-1203

The SpaceLogic KNX power supply generates the bus voltage for the KNX line.
The power supply has two outputs – one KNX output with integrated choke and one DC 30 V output for additional devices.
Two identical power supply units can be connected in parallel to double the output current.
The power supply has a floating signalling contact for operation and diagnostic messages.
Features:
Nominal current can be distributed as desired. Reset button to disconnect the power and reset the bus devices. Short-circuit proof. Surge-proof. Open-circuit proof. For operation in installations with emergency power supply.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: 220-240 V AC,
Mains frequency: 50/60 Hz
Power dissipation: max. 1.8 W
KNX Medium: TP256
Bus output voltage: 28-31 V DC SELV
Bus output current: 320 mA (all outputs)
DC 30 V output voltage: 30 V DC
Signal output: 12-230 V AC, 2-30 V DC
Switching current: 5 mA ... 2
Buffer time: ca. 200 ms at 230 V A
Device width: 4 TE = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX Power Supply 640 mA



Version Art. no.

MTN6513-1202

The SpaceLogic KNX power supply generates the bus voltage for the KNX line.
The power supply has two outputs – one KNX output with integrated choke and one DC 30 V output for additional devices.
Two identical power supply units can be connected in parallel to double the output current.
The power supply has a floating signalling contact for operation and diagnostic messages.
Features:
Nominal current can be distributed as desired. Reset button to disconnect the power and reset the bus devices. Short-circuit proof. Surge-proof. Open-circuit proof. For operation in installations with emergency power supply.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: 220-240 V AC,
Mains frequency: 50/60 Hz
Power dissipation: max. 2.9 W
KNX Medium: TP256
Bus output voltage: 28-31 V DC SELV
Bus output current: 640 mA (all outputs)
DC 30 V output voltage: 30 V DC
Signal output: 12-230 V AC, 2-30 V DC
Switching current: 5 mA ... 2 A
Buffer time: ca. 200 ms at 230 V
Device width: 4 TE = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

System Components



SpaceLogic KNX Power Supply 1280 mA



Version	Art. no.
	MTN6513-1201

The SpaceLogic KNX power supply generates the bus voltage for the KNX line. The power supply has two outputs – one KNX output with integrated choke and one DC 30 V output for additional devices.
The power supply has a floating signalling contact for operation and diagnostic messages.
Features:
Nominal current can be distributed as desired. Reset button to disconnect the power and reset the bus devices. Short-circuit proof. Surge-proof. Open-circuit proof. For operation in installations with emergency power supply.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: 220-240 V AC,
Mains frequency: 50/60 Hz
Power dissipation: max. 6.4 W
KNX Medium: TP256
Bus output voltage: 28-31 V DC SELV
Bus output current: 1280 mA (all outputs)
DC 30 V output voltage: 30 V DC
Signal output: 12-230 V AC, 2-30 V DC
Switching current: 5 mA ... 2 A
Buffer time: ca. 200 ms at 230 V
Device width: 6 TE = approx. 108 mm
Contents: With bus connecting terminal and cable cover.





SpaceLogic KNX power supply REG-K/320 mA



Version	Art. no.
light grey	**MTN684032**

For generating the bus voltage for a line with up to 64 bus devices.
With integrated choke to decouple the power supply from the bus and a push-button to disconnect the power and reset the bus devices connected to the line.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: AC 110-230 V ±10%
Operating voltage: min. AC 92 V - max. AC 253 V
Mains frequency: 50-60 Hz ±10%
Output voltage: DC 30 V
Output current: max. 320 mA, short-circuit-proof
Device width: 4 TE = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX power supply REG-K/320 mA with emergency power input



Version	Art. no.
light grey	**MTN683832**

For generating the bus voltage for a line with up to 64 bus devices. The emergency power supply REG can be connected in order to buffer the bus voltage.
With integrated choke to decouple the power supply from the bus and a push-button to disconnect the power and reset the bus devices connected to the line.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: AC 110-230 V ±10%
Operating voltage: min. AC 92 V - max. AC 253 V
Mains frequency: 50-60 Hz ±10%
Output voltage: DC 30 V
Output current: max. 320 mA, short-circuit-proof
Device width: 4 TE = approx. 72 mm
Accessories: SpaceLogic KNX REG emergency power supply MTN683901
Contents: With bus connecting terminal and cable cover.

System Components





SpaceLogic KNX power supply REG-K/640 mA



Version	Art. no.
light grey	**MTN684064**

For generating the bus voltage for a line with up to 64 bus devices.
With integrated choke to decouple the power supply from the bus and a push-button to disconnect the power and reset the bus devices connected to the line.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: AC 110-230 V ±10%
Operating voltage: min. AC 92 V - max. AC 253 V
Mains frequency: 50-60 Hz ±10%
Output voltage: DC 30 V
Output current: max. 640 mA, short-circuit-proof
Device width: 4 TE = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX power supply REG-K/640 mA with emergency power input



Version	Art. no.
light grey	**MTN683890**

For generating the bus voltage for a line with up to 64 bus devices. The emergency power supply REG can be connected in order to buffer the bus voltage.
With integrated choke to decouple the power supply from the bus and a push-button to disconnect the power and reset the bus devices connected to the line.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Nominal voltage: AC 110-230 V ±10%
Operating voltage: min. AC 92 V - max. AC 253 V
Mains frequency: 50-60 Hz ±10%
Output voltage: DC 30 V
Output current: max. 640 mA, short-circuit-proof
Device width: 4 TE = approx. 72 mm
Accessories: SpaceLogic KNX REG emergency power supply MTN683901
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX REG emergency power supply



Version	Art. no.
light grey	**MTN683901**

To buffer the bus voltage. If a complete mains failure occurs, an external lead gel battery with a voltage of DC 12 V (SELV) can be connected to the REG power supply for buffering. The lead gel battery is recharged or maintained in its charged state by integrated charging electronics.
A binary input can be connected in order to register the operational statuses (mains voltage, error warning, battery operation).
For installation on DIN rails TH35 according to EN 60715.
Nominal voltage: AC 110-230 V ±10%
Operating voltage: min. AC 92 V - max. AC 253 V
Mains frequency: 50-60 Hz ±10%
Output to power supply:
Output voltage: DC 30 V ±2 V
Output current: without battery with mains supply max. 300 mA, with battery without mains supply max. 640 mA
Buffer time with lead gel battery 7,2 Ah:
683890: approx. 0.5 h
683832: approx. 1 h
683816: approx. 2 h
Buffer time with lead gel battery 18 Ah:
683890: approx. 1.25 h
683832: approx. 2.5 h
683816: approx. 5 h
Short-circuit current: < 1.5 A
Charging current: max. 1 A
Connections: plug-in screw terminal for main connector, operating state (4-pin, 3 floating contacts) and emergency power supply. Plug-in terminal for battery connection (two 1 mm pins)
Device width: 4 modules = approx. 72 mm
In KNX, to be completed with: KNX power supply REG-K/160 mA with emergency power input MTN683816
SpaceLogic KNX power supply REG-K/320 mA with emergency power input MTN683832
SpaceLogic KNX power supply REG-K/640 mA with emergency power input MTN683890
Accessories: Lead gel battery MTN668990
MTN668991
Binary input REG-K/4x24 MTN644892
SpaceLogic KNX Power supply REG, DC 24 V/0,4 A MTN693003
Contents: With connecting terminal and cable cover





Lead gel battery



Version	Art. no.
7.2 Ah	**MTN668990**

Lead gel battery to connect to the emergency input of the power supply 320 REG-K with battery connection.
Nominal voltage: DC 12 V
Capacity: 7.2 Ah
In KNX, to be completed with:
SpaceLogic KNX REG emergency power supply MTN683901

Lead gel battery



Version	Art. no.
18 Ah	**MTN668991**

Lead gel battery for connecting to the emergency power supply REG.
Nominal voltage: DC 12 V
Capacity: 18 Ah
In KNX, to be completed with:
SpaceLogic KNX REG emergency power supply MTN683901

KNX Secure System coupler



KNX Security

The KNX standard was extended by KNX Security to protect KNX installations from unauthorized access. KNX Security reliably prevents the monitoring of communication as well as the manipulation of the system.
The specification for KNX Security distinguishes between KNX IP Security and KNX Data Security. KNX IP Security protects the communication over IP while on KNX TP the communication remains unencrypted. Thus, KNX IP Security can also be used in existing KNX systems and with non-secure KNX TP devices.
KNX Data Security describes the encryption at telegram level. This means that the telegrams on the twisted pair bus are also encrypted.

KNX IP Security for the router function
The coupling of individual KNX TP lines via IP is referred as KNX IP routing.
Routing communication is encrypted with KNX IP Security. This means that only IP devices that know the encryption key can decrypt the communication and send valid telegrams. A time stamp in the routing telegram ensures that no previously recorded telegrams can be replayed. This prevents the so-called replay attack.
The key for the routing communication is reassigned by ETS for each installation. If KNX IP Security is used for routing, all connected KNX IP devices must support security and be configured accordingly.

KNX IP Security for the interface function
When using a KNX IP device as an interface to the bus, access to the installation is possible without security for all devices that have access to the IP network. With KNX Security a ETS project password is required. A secure connection is already established for the transmission of the password. All communication via IP is encrypted and secured. In both modes, the interface forwards both encrypted and unencrypted KNX telegrams. The security properties are checked by the respective receiver or tool.

KNX Data Security for the device
The KNX secure device also supports KNX Data Security to protect the device from unauthorized access from the KNX bus. If the KNX secure device is programmed via the KNX bus, this is done with encrypted telegrams.
NOTE: Encrypted telegrams are longer than the previously used unencrypted ones. For secure programming via the bus, it is therefore necessary that the interface used (for example, USB-, IP-interface) and any intermediate line couplers support the so-called KNX long frames.

SECURE

Devices supporting KNX Security

System Components



SpaceLogic KNX Coupler DIN Rail

Version	Art. no.
	MTN6500-0101

For logical connection and electrical isolation of lines and areas.
The device supports KNX Security. This option can be activated in the ETS. As a secure line coupler, the device enables the forwarding of both secured and unsecured communication. In addition, access to the device itself (e.g. for a download) is protected by KNX Security.
The device has a filter table (8k bytes) and ensures a galvanic separation between the lines.
The coupler supports KNX longframes and is compatible with the ETS 5 software. With 2 integrated push-buttons for testing purpose and 3 status LEDs.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using bus connecting terminals.
KNX software functions: The device can be used as a area / line coupler or as a repeater for forming line segments in existing or new KNX systems. The function as a coupler or repeater can be parameterised.
Functions as coupler:
Use as a area or line coupler depending on the physical address. Reduction of the bus load through the filter function (filter table). Support of the full address area (Group 0-31) with filter function. Forwarding of individual addressed telegrams (sub line => main line, main line => sub line) can be parameterised. Forwarding of group telegrams (sub line => main line, main line => sub line) can be parameterised. Telegram repetitions in the event of transmission errors can be set separately for group telegrams, broadcast telegrams and physically addressed telegrams. Telegram confirmation for group telegrams and physically addressed telegrams can be parameterised separately.
Functions as repeater:
Expansion of a line into segments. Telegram repetitions in the event of transmission errors can be set separately for group telegrams, broadcast telegrams and physically addressed telegrams.
Device width: 1 modules = approx. 18 mm
Note: This application requires ETS 5 or higher.
Contents: With 2 bus connecting terminals and 2 cable covers.



SpaceLogic KNX IP Router DIN Rail

Version	Art. no.
	MTN6500-0103

The SpaceLogic KNX IP Router allows forwarding of telegrams between different lines through a LAN (IP) as a fast backbone. In addition this KNX IP Router is suited to connect a PC to the KNX network e.g. for ETS programming.
The KNX IP Router supports KNX Security which can be enabled in ETS. As secure router the device allows coupling of not secured communication on KNX TP to a secured IP backbone. For the interface functionality (tunneling) KNX security prevents from unauthorized access.
The router supports up to 8 tunneling channels. For each tunneling channel a separate individual address must be configured. The IP address can be obtained by a DHCP server or by manual configuration (ETS) respectively. This KNX IP Router works according to the KNXnet/IP specification using the core, the device management, the tunneling and the routing part.
The SpaceLogic KNX IP Router has an extended filter table for main group 0..31 and is able to buffer up to 150 telegrams. The Router is powered by the KNX bus. An additional power supply is not needed. With 2 integrated push-buttons for testing purpose and 3 status LEDs.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal. The LAN network is conneted via RJ45 socket.
Device width: 1 module = approx. 18 mm
Note: This application requires ETS 5 or higher.
Contents: With bus connecting terminal and cable cover.

System Components



SpaceLogic KNX IP Interface DIN Rail



Version	Art. no.
	MTN6502-0105

The SpaceLogic KNX IP Interface is an interface between IP and KNX. You can access the KNX Bus from every point of your LAN. The SpaceLogic KNX IP Interface can be used as programming interface for ETS 5 Software and allows to access the KNX bus over the Internet via VPN.
The device supports KNX Security which can be enabled in ETS. With its interface functionality (tunneling) KNX security prevents from unauthorized access. The device supports up to 8 tunneling channels. For each tunneling channel a separate individual address must be configured. With 2 integrated push-buttons to select the tunneling channel and 3 status LEDs.
The Interface is powered by the KNX bus. An additional power supply is not needed.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal. The LAN network is conneted via RJ45 socket.
Device width: 1 module = approx. 18 mm
Note: This application requires ETS 5 or higher.
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX USB Interface DIN Rail

Version	Art. no.
	MTN6502-0101

For connecting a programming or diagnostics device with a USB 2.0 interface to the KNX. The USB connector (Type C) is galvanic isolated from the KNX bus. It can be used as a programming interface for ETS Software Version 4 (or higher).
The device is programmed locally with the physical address and does not have a programming button and programming LED. With 2 status LEDs.
The KNX USB interface supports KNX “longframe” communication and is compatible with KNX security telegrams / devices. This allows faster KNX downloads if supported by the target device (e.g. MTN6725-0001).
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Device width: 1 module = approx. 18 mm
Contents: With bus connecting terminal and cable cover.

System coupler



Coupler REG-K



Version	Art. no.		
light grey	**MTN680204**	**Discontinued**	**June 2020**

For logical connection and electrical isolation of lines and areas.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: The device can be used as a backbone / line coupler or as a repeater for forming line segments in existing or new KNX systems. The function as a coupler or repeater can be parameterised.
Functions as coupler
Use as a backbone or line coupler depending on the physical address. Reduction of the bus load through the filter function (filter table). Support of the full address area (Group 0-31) with filter function. Forwarding of physically addressed telegrams (line => main line, main line => line) can be parameterised. Forwarding of group telegrams (line => main line, main line => line) can be parameterised. Telegram repetitions in the event of transmission errors can be set separately for group telegrams, broadcast telegrams and physically addressed telegrams. Telegram confirmation for group telegrams and physically addressed telegrams can be parameterised separately.
Functions as repeater
Expansion of a line to max. 4 line segments with up to 64 participants each (incl. line coupler or repeater). Telegram repetitions in the event of transmission errors can be set separately for group telegrams, broadcast telegrams and physically addressed telegrams. With repeaters, the telegrams are always forwarded.
Device width: 2 modules = approx. 36 mm
Note: With the coupler/repeater 7116/1.1 application, the entire group address range from 0 to 31 can be used for the filter function of the coupler (support for extended group addresses). This application requires ETS 4.1 or higher.
Contents: With 2 bus connecting terminals.



KNX/IP router REG-K



Version	Art. no.		
light grey	**MTN680329**	**Discontinued**	**June 2020**

The KNX/IP router enables telegrams to be forwarded between different lines via LAN (IP) as a rapid backbone. The device can additionally serve as a programming interface in order to connect a PC with the KNX bus (e.g. for ETS programming with suitable ETS).
The IP address can be assigned dynamically via a DHCP server or via manual configuration (ETS parameter). The device operates in accordance with the KNXnet/IP specification using Core, device management, tunnelling and routing.
The KNX/IP router forwards telegrams in both directions whilst taking a filter table into account and can buffer up to 150 telegrams.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Supply voltage: DC 12-30 V (at DC 24 V 40 mA), AC 12-24 V
Device width: 2 modules = approx. 36 mm
In KNX, to be completed with: SpaceLogic KNX Power supply REG, DC 24 V/0,4 A MTN693003
SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Also alternatively Power over Ethernet (PoE).
Note: With version 0C and higher, a total of up to 5 simultaneous connections is supported.
Contents: With bus connecting terminal.

System accessories





Bus connecting terminal



Version	Art. no.
red/dark grey	**MTN689701**

For connecting max. 4 core pairs to an KNX device, can also be used as a branch terminal.
Consists of two interlocked terminal parts in red (“+”) and dark grey (“-”), each with 4 plug-in terminals. For solid conductors with a diameter of 0.6 to 0.8 mm.
Contents: 1 PU = 50 terminals.

Branch terminal, yellow/white



Version	Art. no.
yellow/white	**MTN689702**

Branch terminal comprising two interlocking terminal parts in yellow and white, each with 4 plug-in terminals. For solid conductors with a diameter of 0.6 to 0.8 mm.
For wiring the yellow/white cores of the bus cable.
Contents: 1 PU = 50 terminals.



IR universal remote control



Version	Art. no.
black/white	**MTN5761-0000**

10 channel IR remote control. For the control of all TELE sensor covers, blind push-buttons with IR receiver, presence detectors with IR receivers and KNX devices with IR receivers.
Battery: 2 microcells (IEC LR 0.3 AAA)
(not included)
Range: up to 12 m
Receiver: TELE sensor cover System M MTN5779.., MTN5703..
Blind push-button with IR receiver and sensor connection System M MTN5880.., MTN5864..
ARGUS Presence Master with IR, relay 1-gang MTN5510-1119
ARGUS Presence Master with IR, relay 2-gang MTN5510-1219
ARGUS Presence Master with IR, 1-10 V MTN5510-1419
ARGUS Presence Master with IR, DALI MTN5510-1519
KNX ARGUS Presence with light control and IR receiver MTN6309..
Push-button, 4-gang plus with IR receiver System M MTN6279.., MTN6175..
KNX 1-gang push-button with IR receiver Altira ALB4x152
Unica MGU3.532.18, MGU3.532.25
Unica Top MGU3.532.12, MGU3.532.30
Unica MGU5.532.18, MGU5.532.25
Unica Top MGU5.532.12, MGU5.532.30
Push-button 4-gang plus with room temperature control unit System M MTN6214-03.. /-04..
Contents: Without battery.

Logic module



SpaceLogic KNX Logic module Basic REG-K



Version	Art. no.
light grey	**MTN676090**

In KNX installations, the logic module serves as a logic and control device. It has 10 logic, 10 filter/timer, 8 converter and 12 multiplexer modules.
With 3 freely programmable push-buttons and 3 status LEDs. They can be assigned control and test functions and can be operated on the device.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions:
10 logic modules (AND, OR, XOR)
- Each with up to 8 binary input objects and an output object.
- Input and output object inversion.
- Output disable via gate function.
- Behaviour of each input object after bus reset.
- Adjustable sending behaviour.

10 filter and timer modules
- Binary input objects and an output object with time delays.
- Binary input object filtering before output.
- Output disable via gate function.
- Behaviour of each input object after bus reset.
- Adjustable sending behaviour.

8 converter modules
- Conversion of 1 bit switching telegrams into 2 bit priority control.
- Conversion of 1 bit switching telegrams into 8 bit value telegrams.
- Conversion of 8 bit value telegrams into 1 bit switching telegrams.
- Output disable via gate function.
- Behaviour of each input object after bus reset.
- Adjustable sending behaviour.

12 multiplexer modules (lighting control)

Multiplexer modules are used to selectively control telegrams, e.g. to toggle between single room and total room control for conference rooms with partition walls.
- Supported telegram formats by module: 1 bit, 2 bit, 4 bit, 8 bit , 2 byte.
- A module can be used for the 4 byte format.
- Telegram forwarding/blocking in one or both directions using the control object.
- Adjustable gate behaviour.
- Adjustable control object behaviour.
- Output disable via gate function.
- Adjustable sending behaviour.
- Adjustable sending delay.

Push-button and LED assignment
- The three push-buttons and the three LEDs can be freely assigned with binary objects.
- Behaviour per LED.
- Behaviour per push-button.

Behaviour after bus reset
- Adjustable module start-up delay after bus voltage recovery.

Device width: 2.5 module = approx. 45 mm

Energy measurement



SpaceLogic KNX Energy Meter, REG-K/3x230 V/16 A



Version	Art. no.
light grey	**MTN6600-0603**

Device for measuring and monitoring energy consumption at up to three channels. Different phases can be connected to the channels. The data is transmitted to the KNX bus for analysis and visualisation.
There is a resettable energy counter and a total energy counter for each channel. The device saves the values in the event of a power failure. If one of up to 8 threshold values is exceeded, telegrams for energy-saving and alarm functions can be sent to different loads via the bus.
The energy meter can receive energy values measured externally (e.g. from other energy meters or switch actuators with current detection) via the KNX bus and summate them.
With screw terminals.
Suitable for installation on DIN rails TH35 according to EN 60715.
KNX software functions: Functions per channel:
Adjustable energy unit (Wh/kWh). Energy meter (resettable). Total energy meter. Adjustable transmission of power and current values.
Energy-saving function: telegrams for saving energy (switch object, value object, dimming object, scene object and temperature object) are sent when one of up to 8 threshold values is exceeded. 8 separately adjustable threshold values with tolerance (selectable via object). Adjustable tolerances and delays.
Alarm function: alarms are sent when current values fall above or below threshold values. Adjustable tolerances and delays.
Functions for all channels:
Consumption values with time stamp. Time can be received via an external KNX timer.
Adjustable nominal voltage (210-240 V). 4 energy counters to count seperatly depending on tariff. Summation of energy values from several channels and external energy values. Status responses regarding bus voltage failure, exceedance of power, total power and tariff meters.
Energy measurement:
Number of channels: 3
Nominal voltage: AC 220/230 V, 50/60 Hz
Max. current per channel: 16 A
Min. current per channel: 20 mA (power factor 1)
Detection accuracy:
Power and current measurement (calculated): max. 10 %
Capacity of total power meter: > 2 million kWh
Temperature range: -5°C to + 45°C
Type of protection: IP 20
Device width: 4 modules = approx. 72 mm



SpaceLogic KNX Metering Gateway Modbus REG-K



Version	Art. no.
light grey	**MTN6503-0201**

The KNX Metering Gateway Modbus REG-K is a gateway between a Modbus installation and the KNX bus.
The device transmits measured power and consumption values from connected Modbus power counters to the KNX bus. These power counter data can be used to evaluate, visualise, or reduce the power consumption in your KNX installation.
Up to ten Modbus counters can be connected to the gateway in parallel with RTU transfer protocol. These counters send data to the KNX via the gateway. The gateway always works in master mode, and the connected Modbus devices work in slave mode. Communication from KNX to the Modbus is not possible. The ETS application has pre-programmed templates for 17 different Schneider Electric models of Modbus counters. In ETS, a corresponding template can be assigned to each connected Modbus counter. The corresponding Modbus registers are then automatically assigned to the communication objects on the KNX side.

The following models of Schneider Electric Modbus counters are supported:
- PM9C universal meter
- PM210 universal meter
- PM710, PM750 universal meters
- PM810, PM820, PM850, PM870 universal meters
- PM1200, PM6200 universal meters
- iEM3150, iEM3155, iEM3250, iEM3255 energy counters
- PM3250, PM3255 universal meters
- SIM10M Smart Interface Module

For Modbus devices without a template, up to 40 Modbus registers can be directly assigned to the communication objects on the KNX side.
The device is supplied with power via the KNX bus.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
With screw terminals.
KNX software functions: Modbus communication settings (baud rate, parity, delays). Selection of pre-programmed templates for 17 Modbus counters with detection of: voltage (phase 1-3), current (phase 1-3), frequency, power factor, active power, reactive power, apparent power, active energy, reactive energy, 6 binary counters, 2 analogue inputs (using Smart Interface Module SIM10M template). In addition to the template, direct access to Modbus registers and manual assignment of the register values to communication objects are possible. Diagnostic function: active and passive evaluation of errors in the Modbus installation. All values can be reset by a reset object.
Device width: 2.5 modules = approx. 44 mm

Data interfaces



SpaceLogic KNX IP Interface DIN Rail



Version	Art. no.
	MTN6502-0105

The SpaceLogic KNX IP Interface is an interface between IP and KNX. You can access the KNX Bus from every point of your LAN. The SpaceLogic KNX IP Interface can be used as programming interface for ETS 5 Software and allows to access the KNX bus over the Internet via VPN.
The device supports KNX Security which can be enabled in ETS. With its interface functionality (tunneling) KNX security prevents from unauthorized access. The device supports up to 8 tunneling channels. For each tunneling channel a separate individual address must be configured. With 2 integrated push-buttons to select the tunneling channel and 3 status LEDs.
The Interface is powered by the KNX bus. An additional power supply is not needed.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal. The LAN network is conneted via RJ45 socket.
Device width: 1 module = approx. 18 mm
Note: This application requires ETS 5 or higher.
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX USB Interface DIN Rail

Version	Art. no.
	MTN6502-0101

For connecting a programming or diagnostics device with a USB 2.0 interface to the KNX. The USB connector (Type C) is galvanic isolated from the KNX bus. It can be used as a programming interface for ETS Software Version 4 (or higher).
The device is programmed locally with the physical address and does not have a programming button and programming LED. With 2 status LEDs.
The KNX USB interface supports KNX “longframe” communication and is compatible with KNX security telegrams / devices. This allows faster KNX downloads if supported by the target device (e.g. MTN6725-0001).
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Device width: 1 module = approx. 18 mm
Contents: With bus connecting terminal and cable cover.



USB interface REG-K



Version	Art. no.		
light grey	**MTN681829**	**Discontinued**	**June 2020**

For connecting a programming or diagnostics device with a USB1.1 or USB2.0 interface to the KNX.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Device width: 2 modules = approx. 36 mm
Contents: With bus connecting terminal and cable cover.

Interfaces / Gateways




Central plate with square opening



Version	Art. no.
white, glossy	**MTN296044**
polar white, glossy	**MTN296019**
active white, glossy	**MTN296025**
anthracite	**MTN297914**
aluminium	**MTN297960**

For System M.
for loudspeaker connection inserts or flush-mounted USB interface.
To be completed with: Telephone socket-outlet TAE, 1-gang MTN465206, Telephone socket-outlet TAE, 3-gang MTN465226/36, Combination socket-outlet RJ45/TAE (Cat 3) MTN465707, Loudspeaker connection insert, 1-gang MTN466919/14, Loudspeaker connection insert, 2-gang MTN467019/14, USB power supply MTN4366-0000, USB interface, flush-mounted MTN681799



USB interface, flush-mounted



Version	Art. no.		
	MTN681799	**Discontinued**	**June 2020**

For connecting a programming or diagnostics device with a USB1.1 or USB2 interface to the KNX.
For screw mounting in the size 60 installation box. With integrated bus coupler. The device is connected to the bus with a bus connecting terminal. Compatible with ETS 3.
Mounting depth: 20 mm
To be completed with: Central plate with square opening System M
Contents: With bus connecting terminal.


Wiser for KNX

KNX home automation

Wiser for KNX is the perfect choice for houses, collective homes and flats. With 150 BACnet points it is perfectly suitable for an integration in a large building management system of the complete residential building.

Wiser for KNX connects KNX systems and Modbus meters, which conveniently allows control of building functions like lights, shutters and heating and enables energy monitoring with record data on a daily, monthly and yearly basis. Wiser for KNX enables to create advanced logic functions in order to opti-mize energy efficiency and comfort at home.

Wiser for KNX
is perfectly set for
residential buildings

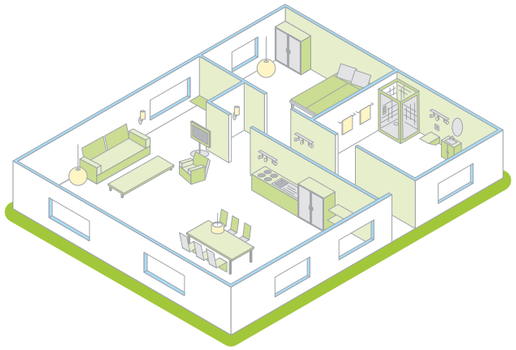



IP connection
for communication in BACnet (server), Modbus, KNX and web services, access to web server to configure and display user interface; IP camera connection

150 points — BACnet

USB port
(Enocean USB key, 3G modem, etc.)

Modbus serial port
links to any devices(Smartlink, IEM, PM, ie.)

10 devices — Modbus devices
That can be connected simultaneously

KNX connection
for communication with KNX products

8 users — Number of Users

RS232 connection
to control music players, video projectors, etc.

Wiser for KNX

Wiser for KNX







JETZT BEI Google Play

Laden im App Store

KNX Modbus

Works with SONOS REVOX

somfy Danfoss

enocean IFTTT

Solutions are tested and validated according to Schneider Electric process

Wiser for KNX



Version	Art. no.
	LSS100100

Wiser for KNX is the perfect choice for single or multi-family houses or residential complexes and integrates a wide range of control functions to improve comfort, security and flexibility for the residents and owners. The system is future proof, interoperable, and scalable.
With its integrated visualization, the installation's energy consumption can be displayed and monitored through PC's and mobile devices. The stored data can also be exported for further analysis (e.g. as .CSV).

Features:
- Freely programmable logic controller with integrated web server
- Configurable visualization alternatives: Custom Visualization or Touch (through Widgets) for PC and mobile devices
- Marketplace with applications to download and extend the controller's functionality
- Sonos and Revox sound systems integration
- Somfy and Danfoss Integration
- Philips Hue support
- IFTTT support
- Multi-protocol gateway between KNX (TP / IP) and Modbus RTU / TCP + BACnet IP
- HTTP / HTTPS / NTP / FTP servers
- Integration of IP cameras
- Data logger with trend display and export function
- Modbus (10 devices)
- Integrated USB port (additional memory, EnOcean & GSM dongles)
- Freely programmable scheduler
- IP router
- Scenes module
- E-mail and SMS
- Easy visualization configuration through eConfigure

Supply voltage: 24 V DC (not included)
Power consumption: 2 W
Display elements:
- **LED indicator 1:** Green LED (CPU load)
- **LED indicator 2:** Green LED (Operation) or Red LED (Reset)
Controls: 1x reset button
Interface: 1x KNX TP1, 1x RJ45 Ethernet 10/100 Mbit/s, 1x RS-485 (incl. Polarization resistor 47 kΩ, no termination), 1x RS-232, 1x USB 2.0
Terminals:
- **KNX bus:** Bus terminal 2 x 0.8 mm
- **Power supply:** 0.5 mm²–1.5 mm²
- **Serial interfaces:** 0.5 mm²–1.5 mm²
Operation: -5°C to +45°C
Dimension: 90 x 52 x 58 mm (HxWxD)
Device width: 3 modules = approx. 54 mm
To be completed with: SpaceLogic KNX Power Supply 24VDC - 0,4A (MTN693003).


Trademark Notice
BACnet is a registered trademark of ASHRAE. Mobus is a registered trademark of Schneider Automation Inc. IFTT is a registered trademark of IFTT Corporation. EnOcean is a registered trademark of EnOceanGmbH. Sonos is a registered trademark of Sonos, Inc. in the United States, Canada and Australia, and a trademark of Sonos, Inc in other countries. REVOX is a registered trademark of STUDER REVOX. SOMFY is a trademark of SOMFY ACTIVITES. Danfoss Icon™ is a registered trademark of Danfoss SA.
Other brands and registered trademarks are the property of the relevant owner.

Building automation

In buildings spaceLYnk provides the ideal solution. Thanks to 2000 BACnet points spaceLYnk can easily be integrated into complete building management systems.

spaceLYnk allows efficient facility management thanks to the convenient web-based user interface with maintenance information like lamp statuses and easy scheduling of all building functions. The webbased interface is accessible from everywhere, enabling remote maintenance.

spaceLYnk
is perfectly set for
commercial buildings

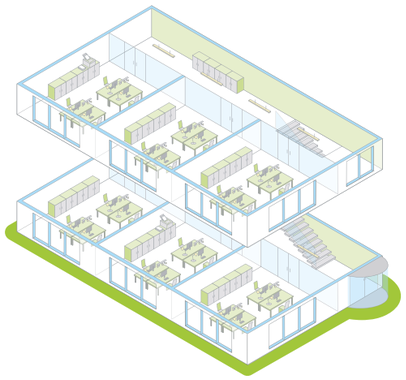

IP connection

for communication in BACnet (server), Modbus, KNX and web services, access to web server to configure and display user interface; IP camera connection

BACnet 2000 points

USB port

(Enocean USB key, 3G modem, etc.)

Modbus serial port

links to any devices(Smartlink, IEM, PM, ie.)

Modbus devices 31 devices

That can be connected simultaneously

KNX connection

for communication with KNX products

Number of Users >50 users

RS232 connection

to control music players, video projectors, etc.

IP/TP KNX filtering Available

Quick IP/TP KNX filtering on object tab



spaceLYnk





Solutions are tested and validated according to Schneider Electric process

spaceLYnk	
Version	Art. no.
	LSS100200

spaceLYnk is the ideal solution for commercial buildings. Thanks to its 2,000 BACnet data points and 31 Modbus devices, spaceLYnk can be effortlessly integrated into complete energy and building management systems.

SpaceLYnk can be used:

- As a KNX logic controller for the creation of complex building automation solutions
- As a building automation solution for small and medium-sized buildings with complete control including LRC (lighting and room control (KNX)) and measurement technology (Modbus devices, Smartlink RTU and IP)
- As a Cross-sector communication for large buildings with complete control via SBO EcoStruXure ™ (BMS from Schneider Electric).
- As a gateway for communication between different products and protocols.
- As a data storage device, for analyzing and exporting the data (e.g. as .csv).
- As a user interface for the display and control of relevant information on PCs and mobile devices.

Features:

- Freely programmable logic controller with integrated web server
- WEB SCADA visualization for PC and mobile devices
- Marketplace with applications to download and extend the controller's functionality
- IFTT support
- Multi-protocol gateway between KNX (TP / IP) and Modbus RTU / TCP + BACnet IP
- HTTP / HTTPS / NTP / FTP servers
- BACnet server (2000 data points)
- Modbus (31 devices)
- Login visualization (>50 users)
- User management tool to define user access and visibility
- Predefined Modbus templates
- BACnet certified "BACnet Application Specific Controller (B-ASC)"
- Integration of IP cameras
- Simple function block programming
- Integrated USB port (additional memory, EnOcean & GSM dongles)
- Freely programmable scheduler
- IP router
- Scenes module
- E-mail and SMS
- Easy visualization configuration through eConfigure
- KNX IP Secure compatibility

Supply voltage: 24 V DC (not included)
Power consumption: 2 W
Display elements:
- **LED indicator 1:** Green LED (CPU load)
- **LED indicator 2:** Green LED (Operation) or Red LED (Reset)
Controls: 1x reset button
Interfaces: 1x KNX TP1, 1x RJ45 Ethernet 10/100 Mbit/s, 1x RS-485 (incl. Polarization resistor 47 kΩ, no termination), 1x RS-232, 1x USB 2.0
Terminals:
- **KNX bus:** Bus terminal 2 x 0.8 mm
- **Power supply:** 0.5 mm²–1.5 mm²
- **Serial interfaces:** 0.5 mm²–1.5 mm²
Operation: -5°C to +45°C
Dimension: 90 x 52 x 58 mm (HxWxD)
Device width: 3 modules = approx. 54 mm

Trademark Notice
BACnet is a registered trademark of ASHRAE. Mobus is a registered trademark of Schneider Automation Inc. IFTT is a registered trademark of IFTT Corporation. EnOcean is a registered trademark of EnOcean GmbH. Sonos is a registered trademark of Sonos, Inc. in the United States, Canada and Australia, and a trademark of Sonos, Inc in other countries. REVOX is a registered trademark of STUDER REVOX. SOMFY is a trademark of SOMFY ACTIVITES. Danfoss Icon™ is a registered trademark of Danfoss SA.
Other brands and registered trademarks are the property of the relevant owner.

BMS IP Gateway

BMS IP Gateway



SpaceLogic KNX BMS IP Gateway



Version	Art. no.	
grey	**LSS100300**	**New**

The SpaceLogic KNX BMS IP Gateway is a bidirectional multifunctional device that allows integration of Spacelogic KNX installations within Ecostruxure Building Operation. The main communication interface is KNX TP with BAC protocol.

The device combines three functions in one device:
- KNX IP router (max. 500 objects)
- KNX IP interface
- DPSU choke power supply

The Gateway is designed for commercial installations and certified by BTL as Application Specific Controller (B-ASC) which ensures 100% compatibility, and at the same time, guarantees a seamless integration with any BACnet device.

Features:
- Number of BACnet objects: 4,000
- Number of BACnet subscriptions (COV) requests: 4,000
- KNX group objects: 4,000
- KNX IP routing objects: 500
- KNX IP Secure compatibility
- KNXP IP tunneling, commissioning of KNX devices, long frame support
- HTTP / HTTPS / NTP servers
- Direct import of *knxproj file with automatic filtering tables

Power supply voltage: DC 12 V - 30 V SELV
Power consumption: 2 W
Power Supply DPSU choke: DC 21 V - 31 V SELV
DPSU choke: rated current max. 320 mA, chort circuit proof, tripping current ≤1A
Display elements:
- **LED indicator 1:** Green LED (CPU load)
- **LED indicator 2:** Green LED (Operation) or Red LED (Reset)
Controls: 1x reset button, 2 jumpers (PoE and POW)
Interfaces: 1x RJ45 Ethernet 10/100 Mbit/s
Terminals:
- **KNX bus:** Bus terminal 2 x 0.8 mm
- **Power supply/Power supply DPSU choke:** 2-gang/3gang pluggable screw terminal for max. 2x 0.5 mm²–1.5 mm²
Protection type: IP20
Ambient temperature operation: 0°C to +45°C
Device width: 4 modules = approx. 72 mm
BACnet Protocol Revision: 22
BACnet Device Profile: B-ASC, B-GW

Trademark Notice
BACnet is a registered trademark of ASHRAE. Other brands and registered trademarks are the property of the relevant owner.

Hybrid Module

Hybrid Module



SpaceLogic KNX Hybrid Module

Version	Art. no.	
white	**LSS100400**	**New**

The Hybrid Module integrates ZigBee wireless devices from Wiser™ offer to an installation that is realized with the controller Wiser for KNX (LSS100100) or spaceLYnk (LSS100200). The user is then able to control Wiser™ devices from their KNX installation and control KNX devices from their Wiser™ devices. The Hybrid Module and its configuration plugin is designed for residential and commercial installations.

The Hybrid Module is powered by separate 24 V power supply and connected to the controller via RS232 communication interface. Once the ZigBee devices are paired with the controller, they are mapped in KNX objects and can be used like any other KNX device. Moreover when Wiser for KNX is used, the wireless devices can be controlled via the Wiser KNX app (Wiser KNX App, available in specific countries).

Because the list of Wiser devices is constantly growing, please visit https://www.go2se.com/ref=LSS100400 in order to refer manual for latest supported device list. The supported devices may vary depending on the country.

Features:
- Hybrid Plugin is available on Marketplace always up to date
- Easy integration and configuration of ZigBee wireless devices
- Automatic upgrade of the firmware of the Hybrid Module and connected ZigBee wireless devices so the installation is always well maintained and up to date

Supply voltage: DC 24 V
Display elements: LED bicolor (Red/Orange)
Interfaces: Antenna, RS232 communication (TX, RX, GND) and DC 24 V power supply(-/+)
Ambient temperature operation: 0°C to +45°C
Device width: 1 modules = approx. 18 mm

Antenna
Transmitting frequency: 2405 MHz ... 2480 MHz
Transmitting power: max. +10 dBm (10 mW)
Cable length: 3 m

Scope of delivery: SpaceLogic KNX Hybrid Module, SpaceLogic KNX Hybrid Antenna LSS100410



SpaceLogic KNX Hybrid Antenna



Version	Art. no.	
black	**LSS100410**	**New**

Spare part.

Hybrid Antenna for connection to the SpaceLogic KNX Hybrid Module. The antenna is placed outside the cabinet. With magnetic base.

Transmitting frequency: 2405 MHz ... 2480 MHz
Transmitting power: max. +10 dBm (10 mW)
Cable length: 3 m

Control and display devices





SpaceLogic KNX Touch IP 7





Version	Art. no.	
white	**MTN6260-7770**	**New**
black	**MTN6260-7760**	**New**

The SpaceLogic KNX Touch IP 7 inch is a touch screen used to display the visualization from Wiser for KNX or spaceLYnk logic controllers. It can be installed in both Residential and Commercial buildings and in new or existing KNX installations.

The touch panel can display the widget-based Touch visualization or the PC/Tablet visualization with the possibility of realistic graphics. It can also display the new Wiser KNX App, in case the user would like to control their KNX installation in a similar way as from his Smartphone.

All interaction with the touch panel is very easy and efficient, adapted to the needs of the modern concept of smart homes and buildings. The installation can be done horizontally or vertically allowing landscape or portrait mode.

The touch panel is equipped with an embedded application, making the configuration easy and fast. Thanks to WiFi connectivity the installation of touch panel is easier and provides a freedom in choosing of installation location.

An over the air update (OTAU) feature available in the touch panel keeps the solution always up to date and secure. The Touch Panel can be installed surface mounted, anywhere were there would be a 24 V cables to power it.

TouchPanel
Screen diagonal: 17.47 cm (7")
Resolution: 1024 x 600
Type: Colorful TFT LCD & multi-touch capacitive screen

Horizontal orientation
Vertical top / bottom viewing angle: 30° / 70°
Horizontal right / left viewing angle: 70° / 70°

Vertical orientation
Vertical top / bottom viewing angle: 70° / 70°
Horizontal right / left viewing angle: 30° / 70°

Power
2-wire power supply: DC 24 V
Current consumption in standby state (mA): 90 mA
Current consumption in activestate (mA): 240 mA

Wi-Fi®
Frequency band: IEEE 802.11 a/b/g/n/ac 2.4/5 GHz (2400-2483.5 MHz, 5150-5250 MHz)

Environmental conditions
Operating temperature: -10 °C to +55 °C
Operating Humidity: 0% to 95% RH no condensing
Storage temperature: -25 °C to +70 °C
Storage humidity: 0 % to 95 % RH no condensing
IP rating: IP30

Dimensions and weight
Dimensions (W x H x D): 132.76 x 196.65 x 23.91 mm
Weight: 448 g / 814 g (with package)

Location

When choosing the installation location, the maximum cable length must be observed.
The following shows the lengths from the touch panel to the respective assemblies in the system.

- YR 2x0.8 mm, J-Y(ST)Y 2x2x0.8 mm, A-2Y(L)2Y 2x2x0.8 mm: cable must not be longer than 120 m.
- A-2Y(L)2Y 2x2x0.6 mm, J-Y(ST)Y 2x2x0.6 mm: cable must not be longer than 80 m.



SpaceLogic KNX 4" Touch Unit





Version	Art. no.	
glass	**MTN6215-0410**	**New**

The 4" Touch unit is a room controller designed to be the center of the smart home. Premium materials and a high-quality display with built-in sensors offer a wide range of applications.

The slim design of the product fits perfectly into the modern concept of today's smart installations and architecture. The product can be used in both residential and commercial projects. The product has a modern, seamless user interface that provides an immersive experience every time it is used, with the display waking up simply by moving closer thanks to the proximity sensor.

The display has up to 9 screens that can display individual functions as widgets. This allows you to have different combinations of up to 6 widgets on each screen and effectively control all connected systems. You move between screens with a simple swipe, familiar from traditional smartphone use.


User Interface functions:
- Different UI theme style
- Screen saver
- Orientation indicator
- Proximity function triggered by object
- Setting the backlight in normal/night mode
- Setting the appearance of the screen

Main functions
- Brightness dimming
- RGB dimming
- RGBW dimming
- Colour temperature dimming
- Venetian blind position and slat
- Air conditioner control
- Room temperature control
- Ventilation control
- Audio control

HVAC controller functions:
- FCU controller: switching on/off (2-point control), switching PWM (PI control), continuous control (PI control)
- Floor heating controller
- Ventilation controller

General: Scene group function, 8 logic function channels (AND; OR, XOR, threshold comparator, format converter) each with 8 inputs

Power supply from KNX: DC 21-30 V approx. 24 V/3 mA
Auxiliary Power supply: DC 21-30 V approx. 24 V/85 mA
Screen: 10 cm (3.95") LCD, 480 x 480 pixels
Measuring accuracy: ±1 °C at 25 °C
IP protection rating: IP 20
Dimensions WxHxD: 86 x 86 x 32 mm
Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5 and higher.



KNX Multitouch Pro



Version	Art. no.
	MTN6215-0310

For System M.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Note: Programmable with ETS4 and higher.
Contents: With bus connecting terminal and supporting plate.

SpaceLogic KNX

Control and Display Devices



KNX Multitouch Pro



Version	Art. no.
	MTN6215-5910

For System D.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Fixing frame for 3-module box MTN6270-0015
D-Life frame, 1-gang, for 3-module box MTN6010-65xx
Note: Programmable with ETS4 and higher.
Contents: With bus connecting terminal and supporting plate.



Dismantling protection



Version	Art. no.
	MTN6270-0000

Prevents the KNX Push-buttons Pro/Pro T, KNX Multi-Touch Pro, and 4" Touch Unit from being removed easily.
In KNX, to be completed with:
KNX Push-button ProT
System M MTN6185-03/04..
System Design MTN6185-60..
KNX Push-button Pro
System M MTN6180-03/04..
System D MTN6180-60..
System D MTN6181-6035
KNX Multitouch Pro System M MTN6215-03..
System D MTN6215-59..
System D MTN6216-5910
SpaceLogic KNX 4" Touch Unit MTN6215-0410
Contents: 2 stainless steel hooks.



KNX Multitouch Pro



Version	Art. no.
	MTN6216-5910

For the Danish market.
For System D.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
With fixing frame for DK-Fuga wall box.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Note: Programmable with ETS4 and higher.
Contents: With fixing frame for DK-Fuga wall box.
With bus connecting terminal.



Remote sensor for universal room temperature control unit with touch display



Version	Art. no.
	MTN5775-0003

For use with underfloor heating systems.
To be completed with: Universal temperature control unit insert with touch display MTN5775-0000
Programmable universal temperature control unit insert with touch display MTN5776-0000
KNX Multitouch Pro System M MTN6215-03..
System D MTN6215-59..
System D MTN6216-5910

Access control



KNX Access Control eSuite+PC



Version	Art. no.	
	MTN6903-6300	**Discontinued**

With this server it is possible to connect up to 3 external clients with 3 KNX Access Control USB card programmers real time. The connection is done through Ethernet interface.
USB dongle license is included for unlimited rooms.
Integration with third party ERP Fidelio, Leonardo, Gialb systems is possible.
Accessories: KNX Access Control RFID Card reader glass MTN6903-60.., KNX Access Control RFID Card holder glass MTN6903-61.., KNX Access Control RTC glass MTN6903-62.., KNX Access Control USB card prog. MTN6903-6301



KNX Access Control USB card prog.



Version	Art. no.	
	MTN6903-6301	**Discontinued**

The device is fitted in a table container with 3 modules, and is equipped with a USB for the connection to a PC.
It is back lighted for signalling transponder reading or writing. The reader / writer is powered up through the USB port of the PC, which must be provided with the appropriate software to allow the following read/write data: system code, password and date.
In KNX, to be completed with: KNX Access Control eSuite+PC MTN6903-6300
Accessories: KNX Access Control RFID Card reader glass MTN6903-60.., KNX Access Control RFID Card holder glass MTN6903-61..



KNX Access Control RFID Card reader glass



Version	Art. no.	
white	**MTN6903-6019**	**Discontinued**
black	**MTN6903-6014**	**Discontinued**
aluminium	**MTN6903-6060**	**Discontinued**

The device has two free potential binary inputs for door contact, window contacts, bathroom alarm or other needed inputs. On the device there are two low voltage relays for any other freely configurable use.
The front of the transponder is illuminated if no light is available (for dark locations), goes out if the card is invalid, and flashes for 3 seconds if access is not allowed. It is possible to open the door, execute some lighting scene and any other funtion through KNX bus.
Configuration is done with ETS.
Nominal voltage: 12/24 VAC/DC and KNX bus connection
Maximum current: 150 mA
Contact voltage: 24 Vdc
Contact current: 1mA
In KNX, to be completed with: SpaceLogic KNX Power supply REG, 24 V DC / 0.4 A MTN693003, SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Accessories: KNX Access Control RFID Card holder glass MTN6903-61.., KNX Access Control RTC glass MTN6903-62.., KNX Access Control USB card prog. MTN6903-6301, KNX Access Control eSuite+PC MTN6903-6300



KNX Access Control RFID Card holder glass



Version	Art. no.	
white	**MTN6903-6119**	**Discontinued**
black	**MTN6903-6114**	**Discontinued**
aluminium	**MTN6903-6160**	**Discontinued**

The device has two free potential binary inputs for door contact, window contacts, bathroom alarm or other needed inputs. On the device there are two low voltage relays for any other freely configurable use as locker open signal.
The front of the transponder is illuminated if no light is available (for dark locations), goes out if the card is invalid, and flashes for 3 seconds if access is not allowed. It is possible to execute some lighting scene, switch off HVAC system when card is removed and any other funtion through KNX bus.
Configuration is done with ETS. With integrated bus coupler. The bus is connected using a bus connecting terminal.
Nominal voltage: 12/24 VAC/DC and KNX bus connection
Maximum current: 150 mA
Contact voltage: 24 Vdc
Contact current: 1mA
In KNX, to be completed with: SpaceLogic KNX Power supply REG, 24 V DC / 0.4 A MTN693003, SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Accessories: KNX Access Control RFID Card reader glass MTN6903-60.., KNX Access Control RTC glass MTN6903-62.., KNX Access Control USB card prog. MTN6903-6301, KNX Access Control eSuite+PC MTN6903-6300



KNX Access Control RTC glass



Version	Art. no.	
white	**MTN6903-6219**	**Discontinued**
black	**MTN6903-6214**	**Discontinued**
aluminium	**MTN6903-6260**	**Discontinued**

With room temperature control unit and display.
The room temperature control unit can be used for heating and cooling with infinitely adjustable.
KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. thefan status, automatic/manual mode, temperature and operating mode.
The push-buttons are freely parameterisable as push-button pairs (dual-surface) or as single push-buttons.
The device has one free potential binary input for door contact, window contacts, bathroom alarm or other needed inputs. On the device there are one low voltage relay for any other freely configurable use as locker open signal.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
Accessories: KNX Access Control RFID Card reader glass MTN6903-60.., KNX Access Control RFID Card holder glass MTN6903-61.., KNX Access Control USB card prog. MTN6903-6301, KNX Access Control eSuite+PC MTN6903-6300

Push-buttons design-independent



SpaceLogic KNX 4" Touch Unit



Version	Art. no.	
glass	**MTN6215-0410**	**New**

The 4” Touch unit is a room controller designed to be the center of the smart home. Premium materials and a high-quality display with built-in sensors offer a wide range of applications.

The slim design of the product fits perfectly into the modern concept of today’s smart installations and architecture. The product can be used in both residential and commercial projects. The product has a modern, seamless user interface that provides an immersive experience every time it is used, with the display waking up simply by moving closer thanks to the proximity sensor.

The display has up to 9 screens that can display individual functions as widgets. This allows you to have different combinations of up to 6 widgets on each screen and effectively control all connected systems. You move between screens with a simple swipe, familiar from traditional smartphone use.

User Interface functions:
- Different UI theme style
- Screen saver
- Orientation indicator
- Proximity function triggered by object
- Setting the backlight in normal/night mode
- Setting the appearance of the screen

Main functions
- Brightness dimming
- RGB dimming
- RGBW dimming
- Colour temperature dimming
- Venetian blind position and slat
- Air conditioner control
- Room temperature control
- Ventilation control
- Audio control

HVAC controller functions:
- FCU controller: switching on/off (2-point control), switching PWM (PI control), continuous control (PI control)
- Floor heating controller
- Ventilation controller

General: Scene group function, 8 logic function channels (AND; OR, XOR, threshold comparator, format converter) each with 8 inputs

Power supply from KNX: DC 21-30 V approx. 24 V/3 mA
Auxiliary Power supply: DC 21-30 V approx. 24 V/85 mA
Screen: 10 cm (3.95") LCD, 480 x 480 pixels
Measuring accuracy: ±1 °C at 25 °C
IP protection rating: IP 20
Dimensions WxHxD: 86 x 86 x 32 mm

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5 and higher.

Push-buttons System M



KNX Push-button Pro T



Version		Art. no.
☐	polar white, glossy	**MTN6185-0319**
☐	active white, glossy	**MTN6185-0325**
■	anthracite	**MTN6185-0414**
■	aluminium	**MTN6185-0460**

For System M.
Push-button with 1 to 4 operating buttons and integrated temperature sensor for room temperature measurement.
The push button allows two different operation methods: either the normal manual operation via key stroke or the touchless operation triggered by proximity. The touchless operation allows to trigger 1 function, such as toggling or calling up a scene. Both operation methods cannot be performed simultaneously on the same push-button.
In idle state, the surface of the push-button appears as a uniform plane. The labelling of the push-buttons only becomes visible via the backlit symbols after activation. For this purpose, the included prefabricated foils or the individual symbols with various icons.
The position of the operating buttons varies depending on the selected number of operating buttons.
With status indicators.
With integrated bus coupler. The bus is connected using a bus connecting terminal.

ETS device functions:
- Behaviour and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor

KNX software functions:
With touchless function: toggle, switch on, switch off, call up scene

With normal manual operation there are 2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, locking function.

Proximity function: triggered by object or sensor, sensitivity adjustment

Temperature sensor: offset setting, sending of the actual temperature in case of a deviation, cyclic sending of the actual temperature

Accessories: Dismantling protection MTN6270-0000
Foil set for KNX Push-button Pro MTN6270-0010
Note: Programmable only with ETS5.
Contents: Device with inserted prefabricated foil.
With bus connecting terminal and supporting plate.
3 prefabricated foils and 24 different individual symbols with 1 carrier foil.



KNX Push-button Pro



Version	Art. no.	
☐ polar white, glossy	**MTN6180-0319**	**Discontinued**
☐ active white, glossy	**MTN6180-0325**	**Discontinued**
■ anthracite	**MTN6180-0414**	**Discontinued**
■ aluminium	**MTN6180-0460**	**Discontinued**

For System M.
Push-button with 1 to 4 operating buttons and status displays. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs.
The position of the operating buttons varies depending on the selected number of operating buttons.
ETS device functions:
- Behaviour and brightness of the status displays
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
2 programming options:
- Express setting: Calls up a pre-set configuration
- Advanced setting: Individual configuration

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Dismantling protection MTN6270-0000
Foil set for KNX Push-button Pro MTN6270-0010
Note: Programmable with ETS4 and higher.
Contents: Device with inserted prefabricated foil.
With bus connecting terminal and supporting plate.
3 prefabricated foils and 24 different individual symbols with 1 carrier foil.




Foil set for KNX Push-button Pro



Version	Art. no.
	MTN6270-0010

Spare part
For System M.
For individual marking of the KNX Push-buttons Pro/Pro T.
In KNX, to be completed with: KNX Push-button Pro T MTN6185-03/04..., KNX Push-button Pro MTN6180-03/04..,
Contents: 3 prefabricated foils and 24 different individual symbols with 1 carrier foil.



KNX Multitouch Pro



Version	Art. no.
	MTN6215-0310

For System M.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Note: Programmable with ETS4 and higher.
Contents: With bus connecting terminal and supporting plate.



Remote sensor for universal room temperature control unit with touch display



Version	Art. no.
	MTN5775-0003

For use with underfloor heating systems.
To be completed with: Universal temperature control unit insert with touch display MTN5775-0000
Programmable universal temperature control unit insert with touch display MTN5776-0000
KNX Multitouch Pro System M MTN6215-03..
System D MTN6215-59..
System D MTN6216-5910

Push-Buttons



Dismantling protection



Version	Art. no.
	MTN6270-0000

Prevents the KNX Push-buttons Pro/Pro T, KNX Multi-Touch Pro, and 4" Touch Unit from being removed easily.
In KNX, to be completed with:
KNX Push-button ProT
System M MTN6185-03/04..
System Design MTN6185-60..
KNX Push-button Pro
System M MTN6180-03/04..
System D MTN6180-60..
System D MTN6181-6035
KNX Multitouch Pro System M MTN6215-03..
System D MTN6215-59..
System D MTN6216-5910
SpaceLogic KNX 4" Touch Unit MTN6215-0410
Contents: 2 stainless steel hooks.





Push-button, 1-gang plus



Version	Art. no.
white, glossy	**MTN617144**
polar white, glossy	**MTN617119**
active white, glossy	**MTN617125**
anthracite	**MTN627514**
aluminium	**MTN627560**

For System M.
With integrated bus coupling unit.
Push-button with 2 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
The device is connected to the bus line with a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Labelling sheets for push-buttons System M MTN6183..
Contents: With protective hood for plaster. With bus connecting terminal.

Push-button, 2-gang plus



Version	Art. no.
white, glossy	**MTN617244**
polar white, glossy	**MTN617219**
active white, glossy	**MTN617225**
anthracite	**MTN627614**
aluminium	**MTN627660**

For System M.
With integrated bus coupling unit.
Push-button with 4 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
The device is connected to the bus line with a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Labelling sheets for push-buttons System M MTN6183..
Contents: With protective hood for plaster. With bus connecting terminal.

Push-Buttons





Push-button, 4-gang plus



Version	Art. no.
white, glossy	**MTN617444**
polar white, glossy	**MTN617419**
active white, glossy	**MTN617425**
anthracite	**MTN627814**
aluminium	**MTN627860**

For System M.
With integrated bus coupling unit.
Push-button with 8 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
The device is connected to the bus line with a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Labelling sheets for push-buttons System M MTN6183..
Contents: With protective hood for plaster. With bus connecting terminal.


Push-button, 4-gang plus with IR receiver



Version	Art. no.
white, glossy	**MTN617544**
polar white, glossy	**MTN617519**
active white, glossy	**MTN617525**
anthracite	**MTN627914**
aluminium	**MTN627960**

For System M.
With integrated bus coupling unit.
Push-button with 8 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
The functions of each of the keys can be triggered using an IR remote control.
The push-button is pre-programmed for operation with a Merten IR remote control Distance. Many other IR remote controls (e.g. existing TV or CD player remote controls) can be taught into the push-buttons.
The device is connected to the bus line with a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Labelling sheets for multi-function push-button with IR receiver System M MTN6184 ..
Transmitter: IR universal remote control MTN5761-0000
Contents: With protective hood for plaster. With bus connecting terminal.





Labelling sheets for push-buttons

Version	Art. no.
polar white	**MTN618319**
silver	**MTN618320**

For individual labelling of the System M push-buttons with text or symbols.
Accessories from: Push-button, 1-gang plus System M MTN6275.., MTN6171.., Push-button, 2-gang plus System M MTN6276.., MTN6172.., Push-button, 4-gang plus System M MTN6278.., MTN6174..
Contents: 1 sheet for every 28 products.

Labelling sheets for multi-function push-button with IR receiver

Version	Art. no.
polar white	**MTN618419**
silver	**MTN618420**

For individual labelling of the System M multi-function push-button with IR receiver.
Accessories from: Push-button, 4-gang plus with IR receiver System M MTN6279.., MTN6175..
Contents: 1 sheet for every 28 products.

Protective hood for plaster

Version	Art. no.
	MTN627591

For System M.
To protect push-buttons, rockers, room temperature control units and room controllers from contamination from painting and decorating work.
Accessories from: Push-button, 1-gang plus System M MTN6275.., MTN6171.., Push-button, 2-gang plus System M MTN6276.., MTN6172.., Push-button, 4-gang plus System M MTN6278.., MTN6174.., Push-button, 4-gang plus with IR receiver System M MTN6279.., MTN6175.., Push-button 2-gang plus with room temperature control unit System M MTN6212-03.. /-04.., Rocker for 1-gang push-button module System M MTN6191.., MTN6251.., Rocker for 1-gang push-button module with 1/0 imprint System M MTN6254.., MTN6193.., Rocker for 1-gang push-button module with up/down arrow imprint System M MTN6255.., MTN6194.., Rockers for 2-gang push-button module System M MTN6192.., MTN6252.., Rockers for 2-gang push-button module with 1/0 and up/down arrow imprint System M MTN6256.., MTN6195.., Rockers for 2-gang push-button module with up/down arrow and 1/0 imprint System M MTN6257.., MTN6196.., Rockers for 2-gang push-button module with up/down arrow imprint System M MTN6258.., MTN6197..
Note: When the protective hood for plaster is in place, the temperature measurement of the room temperature control unit is restricted.

SpaceLogic KNX

Push-Buttons



Push-button 2-gang plus with room temperature control unit



Version	Art. no.
white, glossy	**MTN6212-0344**
polar white, glossy	**MTN6212-0319**
active white, glossy	**MTN6212-0325**
anthracite	**MTN6212-0414**
aluminium	**MTN6212-0460**

For System M.
Convenient control unit with 4 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
With room temperature control unit and display.
With 5 red LEDs.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
The push-buttons are freely parameterisable as push-button pairs (dual-surface) or as single push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the push-buttons:
Switching, toggling, dimming, blind control (relative or absolute), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions, timed control with synchronisation, notification functions, the cyclic reading of external temperature values, fan control, operating modes, move setpoints.
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.

Scene function.

Operation: Menu.
Contents: With bus connecting terminal and supporting plate.
Screw for protection against dismantling.
With protective hood for plaster.



Push-button 4-gang plus with room temperature control unit



Version	Art. no.
white, glossy	**MTN6214-0344**
polar white, glossy	**MTN6214-0319**
active white, glossy	**MTN6214-0325**
anthracite	**MTN6214-0414**
aluminium	**MTN6214-0460**

For System M.
Convenient control unit with 8 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
With room temperature control unit and display.
With integrated piezoelectric buzzer to display alarm states and IR receiver. All functions of the respective buttons can be controlled via IR remote control.
With 9 red LEDs.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
The push-buttons are freely parameterisable as push-button pairs (dual-surface) or as single push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the push-buttons:

Switching, toggling, dimming, blind control (relative or absolute), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions, timed control with synchronisation, notification functions, the cyclic reading of external temperature values, fan control, operating modes, move setpoints.
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.

Scene function.

Operation: Menu.
Transmitter: IR universal remote control MTN5761-0000
To be completed with: M-Smart frame, 2-gang without central bridge piece MTN4788.., M-Arc frame, 2-gang without central bridge piece MTN4858.., M-Star frame, 2-gang without central bridge piece MTN4668.., MTN4768.., MTN4868.., M-Plan frames, 2-gang without central bridge piece MTN4888.., MTN5158.., Metal frame, 2-gang without central bridge piece M-Elegance MTN4038.., Real glass frame, 2-gang without central bridge piece M-Elegance MTN4048..
Contents: With bus connecting terminal and supporting plate.
Screw for protection against dismantling.
With protective hood for plaster.


SpaceLogic KNX

Push-Buttons









Rocker for 1-gang push-button module



Version	Art. no.
white, glossy	**MTN619144**
polar white, glossy	**MTN619119**
active white, glossy	**MTN619125**
anthracite	**MTN625114**
aluminium	**MTN625160**

For System M.
The rocker is attached to the 1-gang push-button module.
In KNX, to be completed with: KNX push-button module, 1-gang System M MTN625199
Accessories: Protective hood for plaster System M MTN627591

Rocker for 1-gang push-button module with 1/0 imprint



Version	Art. no.
white, glossy	**MTN619344**
polar white, glossy	**MTN619319**
active white, glossy	**MTN619325**
anthracite	**MTN625414**
aluminium	**MTN625460**

For System M.
The rocker is attached to the 1-gang push-button module.
In KNX, to be completed with: KNX push-button module, 1-gang System M MTN625199
Accessories: Protective hood for plaster System M MTN627591

Rocker for 1-gang push-button module with up/down arrow imprint



Version	Art. no.
white, glossy	**MTN619444**
polar white, glossy	**MTN619419**
active white, glossy	**MTN619425**
anthracite	**MTN625514**
aluminium	**MTN625560**

For System M.
The rocker is attached to the 1-gang push-button module.
In KNX, to be completed with: KNX push-button module, 1-gang System M MTN625199
Accessories: Protective hood for plaster System M MTN627591

KNX push-button module, 1-gang



Version	Art. no.
	MTN625199

For System M.
Push-button module without rocker. With programmable status display.
The device is connected to the bus line with a bus connecting terminal. With integrated bus coupler.
KNX software functions: The push-buttons can be parameterised either as a pair (dual-surface) or individually (single-surface).
Single-surface: Switch ON or switch OFF, dimming, scenes.
Dual-surface: Switch ON or switch OFF, dimming, scenes, blinds.
In KNX, to be completed with: Rocker for 1-gang push-button module System M MTN6191.., MTN6251.., Rocker for 1-gang push-button module with 1/0 imprint System M MTN6254.., MTN6193.., Rocker for 1-gang push-button module with up/down arrow imprint System M MTN6255.., MTN6194..

Push-Buttons






Rockers for 2-gang push-button module		Rockers for 2-gang push-button module with 1/0 and up/down arrow imprint	
			
Version	Art. no.	Version	Art. no.
white, glossy	**MTN619244**	white, glossy	**MTN619544**
polar white, glossy	**MTN619219**	polar white, glossy	**MTN619519**
active white, glossy	**MTN619225**	active white, glossy	**MTN619525**
anthracite	**MTN625214**	anthracite	**MTN625614**
aluminium	**MTN625260**	aluminium	**MTN625660**
For System M. The rockers are attached to the 2-gang push-button module. **To be completed with:** Push-button module, 2-gang System M MTN568499 **In KNX, to be completed with:** KNX push-button module, 2-gang System M MTN625299 **Accessories:** Protective hood for plaster System M MTN627591		For System M. The rockers are attached to the 2-gang push-button module. **In KNX, to be completed with:** KNX push-button module, 2-gang System M MTN625299 **Accessories:** Protective hood for plaster System M MTN627591	






Rockers for 2-gang push-button module with up/down arrow and 1/0 imprint		Rockers for 2-gang push-button module with up/down arrow imprint	
			
Version	Art. no.	Version	Art. no.
white, glossy	**MTN619644**	white, glossy	**MTN619744**
polar white, glossy	**MTN619619**	polar white, glossy	**MTN619719**
active white, glossy	**MTN619625**	active white, glossy	**MTN619725**
anthracite	**MTN625714**	anthracite	**MTN625814**
aluminium	**MTN625760**	aluminium	**MTN625860**
For System M. The rockers are attached to the 2-gang push-button module. **In KNX, to be completed with:** KNX push-button module, 2-gang System M MTN625299 **Accessories:** Protective hood for plaster System M MTN627591		For System M. The rockers are attached to the 2-gang push-button module. **In KNX, to be completed with:** KNX push-button module, 2-gang System M MTN625299 **Accessories:** Protective hood for plaster System M MTN627591	

Push-Buttons



KNX push-button module, 2-gang	
	
Version	Art. no.
	MTN625299
For System M. Push-button module without rockers. With programmable status display. The device is connected to the bus line with a bus connecting terminal. With integrated bus coupler. **KNX software functions:** The push-buttons can be parameterised either as a pair (dual-surface) or individually (single-surface). Single-surface: Switch ON or switch OFF, dimming, scenes. Dual-surface: Switch ON or switch OFF, dimming, scenes, blinds. **In KNX, to be completed with:** Rockers for 2-gang push-button module System M MTN6192.., MTN6252.., Rockers for 2-gang push-button module with 1/0 and up/down arrow imprint System M MTN6256.., MTN6195.., Rockers for 2-gang push-button module with up/down arrow and 1/0 imprint System M MTN6257.., MTN6196.., Rockers for 2-gang push-button module with up/down arrow imprint System M MTN6258.., MTN6197..	

Push-buttons System D



KNX Push Button Dynamic Labeling, 1-gang



Version	Art. no.	
1-gang	**MTN6191-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling 1-gang is a push button for 2 rockers on which different functions can be set. The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.

ETS device functions:

- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).

There are 2 programming options for the KNX software functions:

- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 1-gang for KNX Push Button Dynamic Labeling MTN6191-6035, MTN6191-6034, MTN6191-6036, MTN6191-6050, MTN6191-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.

SpaceLogic KNX

Push-Buttons



KNX Push Button Dynamic Labeling, 2-gang



Version	Art. no.	
2-gang	**MTN6192-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling 2-gang is a push button for 4 rockers on which different functions can be set. The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.

ETS device functions:

- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).


There are 2 programming options for the KNX software functions:

- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 2-gang for KNX Push Button Dynamic Labeling MTN6192-6035, MTN6192-6034, MTN6192-6036, MTN6192-6050, MTN6192-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.



KNX Push Button Dynamic Labeling, 3-gang



Version	Art. no.	
3-gang	**MTN6193-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling 3-gang is a push button for 6 rockers on which different functions can be set. The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.

ETS device functions:

- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).


There are 2 programming options for the KNX software functions:

- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 3-gang for KNX Push Button Dynamic Labeling MTN6193-6035, MTN6193-6034, MTN6193-6036, MTN6193-6050, MTN6193-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.



KNX Push Button Dynamic Labeling, universal



Version	Art. no.	
universal	**MTN6194-6010**	**New**

For System D.
The KNX Push Button Dynamic Labeling Universal is a push button for 2 to max 8 rockers on which different functions can be set. This flexible structure allows the number of rockers/functions to be adapted to changing requirements.
The functions are configured in the ETS or eConfigure KNX and then shown accordingly on the display. This type of labeling makes it very easy to change a symbol and text.

ETS device functions:

- Display: Icons can be selected to match the function and their color and brightness can be configured. Individual text can be placed. Cleaning mode can be configured.
- Temperature measurement by internal sensor and setpoint change option for HVAC
- Night mode with reduced display brightness
- Orientation indicator: configuration of behaviour, color and brightness
- KNX programming mode can be activated from the back and from the front.
- Proximity function: can be triggered by the sensor or by object, range of proximity ≤12 cm

KNX software functions:

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene, RGB lighting, color temperature control, locking function, logic function (AND, OR, XOR, threshold converter, format converter).

There are 2 programming options for the KNX software functions:

- Express settings: Calls up a pre-set configuration of the functions
- Extended settings: Individual configuration of the functions

The bus is connected using a bus connecting terminal, power supply via the KNX bus.

To be completed with: Rocker 1-gang for KNX Push Button Dynamic Labeling MTN6191-6035, MTN6191-6034, MTN6191-6036, MTN6191-6050, MTN6191-6052
Rocker 2-gang for KNX Push Button Dynamic Labeling MTN6192-6035, MTN6192-6034, MTN6192-6036, MTN6192-6050, MTN6192-6052
Rocker 3-gang for KNX Push Button Dynamic Labeling MTN6193-6035, MTN6193-6034, MTN6193-6036, MTN6193-6050, MTN6193-6052
Rocker 4-gang for KNX Push Button Dynamic Labeling MTN6194-6035, MTN6194-6034, MTN6194-6036, MTN6194-6050, MTN6194-6052

Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5, ETS6, and eConfigure KNX.
Contents: Push button, bus connecting terminal and supporting plate.

Rocker 1-gang for KNX Push Button Dynamic Labeling

Version	Art. no.	
☐ lotus white	**MTN6191-6035**	**New**
■ anthracite	**MTN6191-6034**	**New**
■ stainless steel	**MTN6191-6036**	**New**
■ nickel metallic	**MTN6191-6050**	**New**
■ mocca metallic	**MTN6191-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, 1-gang MTN6191-6010, KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 1x rocker 1-gang.

Rocker 2-gang for KNX Push Button Dynamic Labeling



Version	Art. no.	
lotus white	**MTN6192-6035**	**New**
anthracite	**MTN6192-6034**	**New**
stainless steel	**MTN6192-6036**	**New**
nickel metallic	**MTN6192-6050**	**New**
mocca metallic	**MTN6192-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, 2-gang MTN6192-6010, KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 2x rockers 2-gang.

Rocker 3-gang for KNX Push Button Dynamic Labeling

Version	Art. no.	
lotus white	**MTN6193-6035**	**New**
anthracite	**MTN6193-6034**	**New**
stainless steel	**MTN6193-6036**	**New**
nickel metallic	**MTN6193-6050**	**New**
mocca metallic	**MTN6193-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, 3-gang MTN6193-6010, KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 1x rocker 2-gang, 2x rockers 4-gang

Rocker 4-gang for KNX Push Button Dynamic Labeling



Version	Art. no.	
lotus white	**MTN6194-6035**	**New**
anthracite	**MTN6194-6034**	**New**
stainless steel	**MTN6194-6036**	**New**
nickel metallic	**MTN6194-6050**	**New**
mocca metallic	**MTN6194-6052**	**New**

For System D.
The rockers are placed on the Push Button Dynamic Labeling. The rockers can be put on and removed again without tools.

To be completed with: KNX Push Button Dynamic Labeling, universal MTN6194-6010
Contents: 4x rockers 4-gang.

SpaceLogic KNX

Push-Buttons



KNX Push-button Pro T



Version	Art. no.	
Thermoplastic		
lotus white	**MTN6185-6035**	
anthracite	**MTN6185-6034**	
sahara	**MTN6185-6033**	
stainless steel	**MTN6185-6036**	
nickel metallic	**MTN6185-6050**	
champagne metallic	**MTN6185-6051**	
mocca metallic	**MTN6185-6052**	

For System D.
Push-button with 1 to 4 operating buttons and integrated temperature sensor for room temperature measurement.
The push button allows two different operation methods: either the normal manual operation via key stroke or the touchless operation triggered by proximity. The touchless operation allows to trigger 1 function, such as toggling or calling up a scene. Both operation methods cannot be performed simultaneously on the same push-button.
In idle state, the surface of the push-button appears as a uniform plane. The labelling of the push-buttons only becomes visible via the backlit symbols after activation. For this purpose, the included prefabricated foils or the individual symbols with various icons.
The position of the operating buttons varies depending on the selected number of operating buttons.
With status indicators.
With integrated bus coupler. The bus is connected using a bus connecting terminal.

ETS device functions:
- Behaviour and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor

KNX software functions:
With touchless function: toggle, switch on, switch off, call up scene
With normal manual operation there are 2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4-bit or 1-byte telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, locking function.
Proximity function: triggered by object or sensor, sensitivity adjustment
Temperature sensor: offset setting, sending of the actual temperature in case of a deviation, cyclic sending of the actual temperature
Accessories: Dismantling protection MTN6270-0000
Foil set for KNX Push-button Pro MTN6270-0011
Fixing frame for 3-module box MTN6270-0015
D-Life frame, 1-gang, for 3-module box MTN6010-65xx
Note: Programmable only with ETS5.
Contents: Device with inserted prefabricated foil.
With bus connecting terminal and supporting plate.
3 prefabricated foils and 24 different individual symbols with 1 carrier foil.



KNX Push-button Pro



Version	Art. no.	
Thermoplastic		
lotus white	**MTN6180-6035**	**Discontinued**
anthracite	**MTN6180-6034**	**Discontinued**
sahara	**MTN6180-6033**	**Discontinued**
stainless steel	**MTN6180-6036**	**Discontinued**
nickel metallic	**MTN6180-6050**	**Discontinued**
champagne metallic	**MTN6180-6051**	**Discontinued**
mocca metallic	**MTN6180-6052**	**Discontinued**

For System D.
Push-button with 1 to 4 operating buttons and status displays. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs.
The position of the operating buttons varies depending on the selected number of operating buttons.
ETS device functions:
- Behaviour and brightness of the status displays
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
2 programming options:
- Express setting: Calls up a pre-set configuration
- Advanced setting: Individual configuration

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Dismantling protection MTN6270-0000
Foil set for KNX Push-button Pro MTN6270-0011
Fixing frame for 3-module box MTN6270-0015
D-Life frame, 1-gang, for 3-module box MTN6010-65xx
Note: Programmable with ETS4 and higher.
Contents: Device with inserted prefabricated foil.
With bus connecting terminal and supporting plate.
3 prefabricated foils and 24 different individual symbols with 1 carrier foil.



KNX Push-button Pro




Version	Art. no.
lotus white	**MTN6181-6035**

For the Danish market.
For System D.
Push-button with 1 to 4 operating buttons and status displays. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs.
The position of the operating buttons varies depending on the selected number of operating buttons.
ETS device functions:
- Behaviour and brightness of the status displays
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.
With fixing frame for DK-Fuga wall box.
KNX software functions:
2 programming options:
- Express setting: Calls up a pre-set configuration
- Advanced setting: Individual configuration

Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Accessories: Dismantling protection MTN6270-0000
Foil set for KNX Push-button Pro MTN6270-0011
Note: Programmable with ETS4 and higher.
Contents: With fixing frame for DK-Fuga wall box.
With bus connecting terminal.
Device with inserted prefabricated foil.
3 prefabricated foils and 24 different individual symbols with 1 carrier foil.



Foil set for KNX Push-button Pro



Version	Art. no.
	MTN6270-0011

Spare part
For System D.
For individual marking of the KNX Push-buttons Pro/Pro T.
In KNX, to be completed with: KNX Push-button Pro T System D MTN6185-60..,
KNX Push-button Pro System D MTN6180-60..,
System D MTN6181-6035
Contents: 3 prefabricated foils and 24 different individual symbols with 1 carrier foil.

Push-Buttons



Dismantling protection



Version	Art. no.
	MTN6270-0000

Prevents the KNX Push-buttons Pro/Pro T, KNX Multi-Touch Pro, and 4" Touch Unit from being removed easily.
In KNX, to be completed with:
KNX Push-button ProT
System M MTN6185-03/04..
System Design MTN6185-60..
KNX Push-button Pro
System M MTN6180-03/04..
System D MTN6180-60..
System D MTN6181-6035
KNX Multitouch Pro System M MTN6215-03..
System D MTN6215-59..
System D MTN6216-5910
SpaceLogic KNX 4" Touch Unit MTN6215-0410
Contents: 2 stainless steel hooks.

Push-Buttons



KNX Multitouch Pro



Version	Art. no.
	MTN6215-5910

For System D.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Fixing frame for 3-module box MTN6270-0015
D-Life frame, 1-gang, for 3-module box MTN6010-65xx
Note: Programmable with ETS4 and higher.
Contents: With bus connecting terminal and supporting plate.



KNX Multitouch Pro



Version	Art. no.
	MTN6216-5910

For the Danish market.
For System D.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
With fixing frame for DK-Fuga wall box.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Note: Programmable with ETS4 and higher.
Contents: With fixing frame for DK-Fuga wall box.
With bus connecting terminal.



Remote sensor for universal room temperature control unit with touch display



Version	Art. no.
	MTN5775-0003

For use with underfloor heating systems.
To be completed with: Universal temperature control unit insert with touch display MTN5775-0000
Programmable universal temperature control unit insert with touch display MTN5776-0000
KNX Multitouch Pro System M MTN6215-03..
System D MTN6215-59..
System D MTN6216-5910

SpaceLogic KNX

Push-Buttons





Fixing frame for 3-module box



Version	Art. no.
	MTN6270-0015

Fixing frame for 3-module installation boxes.
Plug the KNX devices together with the D-Life frame, 1-gang, for 3-module box on the fixing frame.
Suitable for installation on 3-module boxes.
To be completed with: D-Life frame, 1-gang, for 3-module box System D MTN6010-65xx

D-Life frame, 1-gang, for 3-module box



Version	Art. no.
☐ lotus white	**MTN6010-6535**
■ anthracite	**MTN6010-6534**
■ stainless steel	**MTN6010-6536**

Plug the KNX System D devices together with the D-Life frame on the fixing frame for 3-module box.
For horizontal and vertical installation.
To be completed with: Fixing frame for 3-module box MTN6270-0015

Push-buttons UNiCA



Unica KNX push-button, 2 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16161_01BK_E1**	**New**
wine gold	**NP16161_01WG_E1**	**New**
silver	**NP16161_01SL_E1**	**New**

Push-button with 2 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.



Unica KNX push-button, 4 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16162_01BK_E1**	**New**
wine gold	**NP16162_01WG_E1**	**New**
silver	**NP16162_01SL_E1**	**New**

Push-button with 4 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-Buttons



Unica KNX push-button, 6 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16163_01BK_E1**	**New**
wine gold	**NP16163_01WG_E1**	**New**
silver	**NP16163_01SL_E1**	**New**

Push-button with 6 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-Buttons



Unica KNX push-button, 8 key



Version	Art. no.	
Thermoplastic		
dark grey	**NP16164_01BK_E1**	**New**
wine gold	**NP16164_01WG_E1**	**New**
silver	**NP16164_01SL_E1**	**New**

Push-button with 8 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.



Unica KNX push-button, 5 key plus thermomstat



Version	Art. no.	
Thermoplastic		
dark grey	**NP16212_01BK_E1**	**New**
wine gold	**NP16212_01WG_E1**	**New**
silver	**NP16212_01SL_E1**	**New**

Push-button with thermostat, display and 5 operating buttons with status indicators. With an integrated temperature sensor for temperature measurement. The thermostats supports Fan Coil Units (FCU), Variable Refrigerant Flow systems (VRF), floor heating systems and ventilation.
The display shows all relevant information for room temperature control e.g. the actual temperature, heating/cooling status, ventilation, ...
The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Display settings: temperature unit, brightness level, standby adjustment
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor: Calibration and sending behavior

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Power on/off of the device, control mode/operation mode (to call with short/long button press), Fan speed, Temperature +/-, Function page, Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.

Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.

HVAC settings: FCU or VRF controller, floor heating and ventilation.

FCU: Heating and/or cooling mode, room temperature can be taken as reference from the internal sensor, an external sensor or a combination of both. Implementation of a window contact. Setpoint adjustment.

VRF: Heating and/or cooling mode, dehumidifaication mode, fan mode, auto mode, fan speed adjustment, setpoint.

Floor heating: Setpoint, PI control, PWM or switching 2-point feedback control, setpoint adjustment

General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function, support of CO2 sensor, monitoring of further sensors.

Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.



Unica KNX push-button, 8 key plus thermomstat



Version	Art. no.	
Thermoplastic		
dark grey	**NP16214_01BK_E1**	**New**
wine gold	**NP16214_01WG_E1**	**New**
silver	**NP16214_01SL_E1**	**New**

Push-button with thermostat, display and 8 operating buttons with status indicators. With an integrated temperature sensor for temperature measurement. The thermostats supports Fan Coil Units (FCU), Variable Refrigerant Flow systems (VRF), floor heating systems and ventilation.
The display shows all relevant information for room temperature control e.g. the actual temperature, heating/cooling status, ventilation, ...
The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Display settings: temperature unit, brightness level, standby adjustment
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor: Calibration and sending behavior

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Power on/off of the device, control mode/operation mode (to call with short/long button press), Fan speed, Temperature +/-, Function page, Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.

Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.

HVAC settings: FCU or VRF controller, floor heating and ventilation.

FCU: Heating and/or cooling mode, room temperature can be taken as reference from the internal sensor, an external sensor or a combination of both. Implementation of a window contact. Setpoint adjustment.

VRF: Heating and/or cooling mode, dehumidifaication mode, fan mode, auto mode, fan speed adjustment, setpoint.

Floor heating: Setpoint, PI control, PWM or switching 2-point feedback control, setpoint adjustment

General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function, support of CO2 sensor, monitoring of further sensors.

Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.



Unica KNX 4.0 inch touch screen



Version	Art. no.	
glass	**NP16260_0104**	**New**

Comfortable room controller with 4 inch touch panel to control up to 54 functions and the room temperature.
All functions are displayed on up to 9 touch screens and called up with simple finger movements. The touch screen is customizable, e.g. the user can choose between 3 theme styles, different screen savers, 43 predefined icons and 35 individual icons.
The proximity can be triggered by an object (presence detector) and can also be sent, e.g. to trigger another action or for visualization.
An FCU controller, a floor heating controller and a ventilation controller are available as HVAC controllers.

ETS device functions:
- On/Off behavior of the user interface
- Proximity function triggered by object
- Setting the backlight in normal/night mode
- Setting the appearance of the screen

With integrated bus coupler. The bus is connected using a bus connecting terminal.

Functions, control unit/push-button:
- Dual-surface: switch, brightness dimming, curtain step/move, roller blind step/move, scene, value output, loop operation, multiple operation, weather information, energy monitoring
- Single-surface: switch, scene, value output, loop operation, multiple operation, weather information, energy monitoring, air quality display
- With only one function of the screen: brightness dimming, RGB dimming (1 x 3 byte, 3 x 1 byte), RGBW dimming (1 x 6 byte, 4 x 1 byte), Colour temperature dimming, venetian blind position and slat, air conditioner control panel (setpoint/actual temperature, internal/external sensor), room temperatur control panel, ventialtion control panel, audio control (volume adjustment, play mode, 3 play modes)

Functions of the room temperature control unit:
- FCU controller: switching on/off (2-point control), switching PWM (PI control), continuous control (PI control)
- Floor heating controller
- Ventilation controller

General: Scene group function, 8 logic function channels (AND; OR, XOR, threshold comparator, format converter) each with 8 inputs, indication behaviors

Note: Programmable with ETS5 and higher.



Unica KNX push-button, 2 key



Version	Art. no.
Thermoplastic	
metallic silver	**NP16161_01MS**
wine gold	**NP16161_01WG**
silver	**NP16161_01SL**

For the Chinese market.
Push-button with 2 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-Buttons



Unica KNX push-button, 4 key



Version	Art. no.
Thermoplastic	
metallic silver	**NP16162_01MS**
wine gold	**NP16162_01WG**
silver	**NP16162_01SL**

For the Chinese market.
Push-button with 4 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-Buttons



Unica KNX push-button, 6 key



Version	Art. no.
Thermoplastic	
metallic silver	**NP16163_01MS**
wine gold	**NP16163_01WG**
silver	**NP16163_01SL**

For the Chinese market.
Push-button with 6 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-Buttons



Unica KNX push-button, 8 key



Version	Art. no.
Thermoplastic	
metallic silver	**NP16164_01MS**
wine gold	**NP16164_01WG**
silver	**NP16164_01SL**

For the Chinese market.
Push-button with 8 operating buttons and status indicators. In idle state, the surface of the push-button appears as a uniform plane. The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.
Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.
General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function
Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-Buttons



Unica KNX push-button, 5 key plus thermomstat



Version	Art. no.
Thermoplastic	
metallic silver	**NP16212_01MS**
wine gold	**NP16212_01WG**
silver	**NP16212_01SL**

For the Chinese market.
Push-button with thermostat, display and 5 operating buttons with status indicators. With an integrated temperature sensor for temperature measurement. The thermostats supports Fan Coil Units (FCU), Variable Refrigerant Flow systems (VRF), floor heating systems and ventilation.
The display shows all relevant information for room temperature control e.g. the actual temperature, heating/cooling status, ventilation, ...
The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Display settings: temperature unit, brightness level, standby adjustment
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor: Calibration and sending behavior

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Power on/off of the device, control mode/operation mode (to call with short/long button press), Fan speed, Temperature +/-, Function page, Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.

Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.

HVAC settings: FCU or VRF controller, floor heating and ventilation.

FCU: Heating and/or cooling mode, room temperature can be taken as reference from the internal sensor, an external sensor or a combination of both. Implementation of a window contact. Setpoint adjustment.

VRF: Heating and/or cooling mode, dehumidifaication mode, fan mode, auto mode, fan speed adjustment, setpoint.

Floor heating: Setpoint, PI control, PWM or switching 2-point feedback control, setpoint adjustment

General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function, support of CO2 sensor, monitoring of further sensors.

Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.



Unica KNX push-button, 8 key plus thermomstat



Version	Art. no.
Thermoplastic	
metallic silver	**NP16214_01MS**
wine gold	**NP16214_01WG**
silver	**NP16214_01SL**

For the Chinese market.
Push-button with thermostat, display and 8 operating buttons with status indicators. With an integrated temperature sensor for temperature measurement. The thermostats supports Fan Coil Units (FCU), Variable Refrigerant Flow systems (VRF), floor heating systems and ventilation.
The display shows all relevant information for room temperature control e.g. the actual temperature, heating/cooling status, ventilation, ...
The inscription of the keys only becomes visible via the backlit symbols following activation. For this, you can use the enclosed prefabricated foils or the individual symbols with various motifs. Cool white and warm white LEDs show status, the brightness can be defined according to normal and night mode.

ETS device functions:
- Display settings: temperature unit, brightness level, standby adjustment
- Behavior and brightness of the status indicators
- Night mode: LEDs light up with reduced brightness
- Proximity function: The LEDs are only activated and the functions only become visible when approached.
- Temperature sensor: Calibration and sending behavior

With integrated bus coupler. The bus is connected using a bus connecting terminal.

KNX software functions:
2 programming options:
- Express settings: Calls up a pre-set configuration
- Extended settings: Individual configuration

Express settings: Power on/off of the device, control mode/operation mode (to call with short/long button press), Fan speed, Temperature +/-, Function page, Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), scenes.

Extended settings: Switching, dimming, value output, scene control (recal/store a scene), blind, shift register (stepwise, without steps), RGB lighting (RGB, RGBW), multiple operation in which you can define various functions manually (4 objects - on/off, up/down, recall scene, store scene, percentatge, unsigned value), delay mode, color temperature control. For all function a distinction can be made between short and long operation.

HVAC settings: FCU or VRF controller, floor heating and ventilation.

FCU: Heating and/or cooling mode, room temperature can be taken as reference from the internal sensor, an external sensor or a combination of both. Implementation of a window contact. Setpoint adjustment.

VRF: Heating and/or cooling mode, dehumidifaication mode, fan mode, auto mode, fan speed adjustment, setpoint.

Floor heating: Setpoint, PI control, PWM or switching 2-point feedback control, setpoint adjustment

General: Scene group, logic function (AND; OR, XOR, threshold comparator, format converter), indication behaviors, locking function, support of CO2 sensor, monitoring of further sensors.

Note: Programmable with ETS5 and higher.
Contents: Device with inserted prefabricated foil. Additional foil with various symbols. Mounting screws.

Push-buttons Altira





KNX push-button 1-gang



Version	Art. no.
white	**ALB45150** **Discontinued**
aluminium	**ALB46150** **Discontinued**

2 modules
In Altira design.
KNX-push-button with 2 buttons and 2 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 10 symbols: 2x symbol with light opening, 1x symbol “1”, 1x symbol “0”, 2x symbol for dimming, 2x symbol for shutter, 2x symbol (neutral).
With bus connecting terminal.

KNX push-button 2-gang



Version	Art. no.
white	**ALB45151** **Discontinued**
aluminium	**ALB46151** **Discontinued**

2 modules
In Altira design.
KNX-push-button with 4 buttons and 4 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 20 symbols: 4x symbol with light opening, 2x symbol “1”, 2x symbol “0”, 4x symbol for dimming, 4x symbol for shutter, 4x symbol (neutral).
With bus connecting terminal.



KNX 1-gang push-button with IR receiver



Version	Art. no.	
white	**ALB45152**	**Discontinued**
aluminium	**ALB46152**	**Discontinued**

2 modules
In Altira design.
KNX-push-button with 2 buttons, blue status LED and IR receiver. The status LED is located under the symbol window which can be taken off.
The functions of each of the button can be triggered using an IR remote control.
The push-button is pre-programmed for operation with a Schneider-Electric IR remote control Distance. Many other IR remote controls (e.g. existing TV or CD player remote controls) can be taught into the push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Transmitter: IR universal remote control MTN5761-0000
Contents: With bus connecting terminal.

Push-Buttons

Push-buttons Unica



KNX push-button single



Version	Art. no.
☐ white	**NU553018**
☐ white, antibacterial	**NU553020**
■ aluminium	**NU553030**
■ anthracite	**NU553054**

2 modules
In Unica design.
KNX-push-button with 1 rocker (2 buttons) and 2 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 10 symbols: 2x symbol with light opening, 1x symbol “1”, 1x symbol “0”, 2x symbol for dimming, 2x symbol for shutter, 2x symbol (neutral).
With bus connecting terminal.



KNX push-button double



Version	Art. no.
☐ white	**NU553118**
☐ white, antibacterial	**NU553120**
■ aluminium	**NU553130**
■ anthracite	**NU553154**

2 modules
In Unica design.
KNX-push-button with 2 rockers (4 buttons) and 4 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 20 symbols: 4x symbol with light opening, 2x symbol “1”, 2x symbol “0”, 4x symbol for dimming, 4x symbol for shutter, 4x symbol (neutral).
With bus connecting terminal.

Push-Buttons





KNX push-button 1-gang



Version	Art. no.
☐ white	**MGU3.530.18**
■ ivory	**MGU3.530.25**

2 modules
In Unica design.
KNX-push-button with 2 buttons and 2 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 10 symbols: 2x symbol with light opening, 1x symbol “1”, 1x symbol “0”, 2x symbol for dimming, 2x symbol for shutter, 2x symbol (neutral).
With bus connecting terminal.

KNX push-button 2-gang



Version	Art. no.
☐ white	**MGU3.531.18**
■ ivory	**MGU3.531.25**

2 modules
In Unica design.
KNX-push-button with 4 buttons and 4 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 20 symbols: 4x symbol with light opening, 2x symbol “1”, 2x symbol “0”, 4x symbol for dimming, 4x symbol for shutter, 4x symbol (neutral).
With bus connecting terminal.



KNX 1-gang push-button with IR receiver



Version	Art. no.
☐ white	**MGU3.532.18**
■ ivory	**MGU3.532.25**

2 modules
In Unica design.
KNX-push-button with 2 buttons, blue status LED and IR receiver. The status LED is located under the symbol window which can be taken off.
The functions of each of the button can be triggered using an IR remote control.
The push-button is pre-programmed for operation with a Schneider-Electric IR remote control Distance. Many other IR remote controls (e.g. existing TV or CD player remote controls) can be taught into the push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Transmitter: IR universal remote control MTN5761-0000
Contents: With bus connecting terminal.

Push-Buttons

Push-buttons Unica Top







KNX push-button 1-gang



Version	Art. no.
aluminium	**MGU3.530.30**
graphite	**MGU3.530.12**

2 modules
In Unica Top design.
KNX-push-button with 2 buttons and 2 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 10 symbols: 2x symbol with light opening, 1x symbol “1”, 1x symbol “0”, 2x symbol for dimming, 2x symbol for shutter, 2x symbol (neutral).
With bus connecting terminal.

KNX push-button 2-gang



Version	Art. no.
aluminium	**MGU3.531.30**
graphite	**MGU3.531.12**

2 modules
In Unica Top design.
KNX-push-button with 4 buttons and 4 blue status LEDs. The status LED is located under the symbol window which can be taken off.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Contents: With set of 20 symbols: 4x symbol with light opening, 2x symbol “1”, 2x symbol “0”, 4x symbol for dimming, 4x symbol for shutter, 4x symbol (neutral).
With bus connecting terminal.

KNX 1-gang push-button with IR receiver



Version	Art. no.
aluminium	**MGU3.532.30**
graphite	**MGU3.532.12**

2 modules
In Unica Top design.
KNX-push-button with 2 buttons, blue status LED and IR receiver. The status LED is located under the symbol window which can be taken off.
The functions of each of the button can be triggered using an IR remote control.
The push-button is pre-programmed for operation with a Schneider-Electric IR remote control Distance. Many other IR remote controls (e.g. existing TV or CD player remote controls) can be taught into the push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.
Transmitter: IR universal remote control MTN5761-0000
Contents: With bus connecting terminal.

Binary Inputs Overview

	Push-button interface plus		SpaceLogic KNX Binary input REG-K/x10			SpaceLogic KNX Binary input REG-K/x24		SpaceLogic KNX Binary input REG-K/x230	
									
Article number	**MTN670802**	**MTN670804**	**MTN644492**	**MTN644592**		**MTN644892**	**MTN644792**	**MTN644992**	**MTN644692**
Number of channels	2	4	4	8		4	8	4	8
Outputs	2 (only for low-current LEDs)	4 (only for low-current LEDs)	—	—		—	—	—	—
Device width	40x30.5x12.5 mm (LxWxH)		2.5 modules	4 modules		2.5 modules	4 modules	2,5 modules	4 modules
Use cases	Connection of conventional push-buttons or floating contacts		Connection of conventional push-buttons or floating contacts			Connection of conventional devices with AC / DC 24 V outputs, for example, window contacts, wind sensors, glass break sensors		Connection of conventional devices with AC 230 V outputs	
Installation site	In the vicinity of push-buttons		Cabinet			Cabinet		Cabinet	
Connecting terminal	—		Plug-in screw terminals			Plug-in screw terminals		Plug-in screw terminals	
Internally generated voltage	■		■			—		—	
Input voltage / Contact voltage	— / 3.5 V		— / 10 V			AC/DC 24 V / —		AC 230 V / —	
Input current / Contact current	— / 2 mA		— / 2 mA			AC 6 mA, DC 15 mA / —		AC 12 mA / —	
Thresholds	—		—			0 signal: ≤ 5 V 1 signal: ≥11 V		0 signal: ≤ 40 V 1 signal: ≥160 V	
Maximum line length	7.5 m		50 m			100 m		100 m	
Software									
Toggle	■		■			■		■	
Switching	■		■			■		■	
Dimming (via one/two inputs)	■		■			■		■	
Blind (via one/two inputs)	■		■			■		■	
Blind with position values	■		■			■		■	
Edges (1 bit, 2 bit, 4 bit, 1 byte, 2 byte)	■		■			■		■	
Edges (1 bit, 2 bit, 4 bit, 1 byte, 2 byte) short and long operation	■		■			■		■	
8 bit slider	■		■			■		■	
Scenes	■		■			■		■	
Pulse counter	■		■			■		■	
Switch counter	■		■			■		■	
Reset counter	■		■			■		■	
Cyclical sending (1 bit, 2 bit, 1 byte)	■		■			■		■	
Locking function for each chanel	■		■			■		■	
Locking function ■ Adjustable for each channel ■ All channels follow the function of a master channel	■ ■		■ ■			■ ■		■ ■	

SpaceLogic KNX

Binary Inputs Overview

Binary inputs



Push-button interface, 2-gang plus



Version	Art. no.
polar white	**MTN670802**

Generates an internal signal voltage for connecting two conventional push-buttons or floating contacts, and for direct connecting two low-current LEDs.
The cores are 30 cm long and can be extended to max. 7.5 m. For installation in a conventional 60 mm switch box.
KNX software functions: Switching, dimming or controlling blinds via 1 or 2 inputs, position values for blind control (8-bit), pulse edges with 1-, 2-, 4-, or 8-bit telegrams, differentiation between short and long activation, initialisation telegram, cyclical transmission, pulse edges with 2-byte telegrams, 8-bit linear regulator, scenes, counter, disable function, break contact/make contact, debounce time. Outputs for connecting control lamps (low-current LEDs) for the status display.
For each input/output object type:
Contact voltage: < 3 V (SELV)
Contact current: < 0.5 mA
Output current: max. 2 mA
Max. cable length: 30 cm unshielded, can be extended up to max. 7.5 m with twisted unshielded cable.
Dimensions: approx. 40x30.5x12.5 mm (LxWxH)



Push-button interface, 4-gang plus



Version	Art. no.
polar white	**MTN670804**

Generates an internal signal voltage for connecting four conventional push-buttons or floating contacts, and for direct connecting four low-current LEDs.
The cores are 30 cm long and can be extended to max. 7.5 m. For installation in a conventional 60 mm switch box.
KNX software functions: Switching, dimming or controlling blinds via 1 or 2 inputs, position values for blind control (8-bit), pulse edges with 1-, 2-, 4-, or 8-bit telegrams, differentiation between short and long activation, initialisation telegram, cyclical transmission, pulse edges with 2-byte telegrams, 8-bit linear regulator, scenes, counter, disable function, break contact/make contact, debounce time. Outputs for connecting control lamps (low-current LEDs) for the status display.
For each input/output object type:
Contact voltage: < 3 V (SELV)
Contact current: < 0.5 mA
Output current: max. 2 mA
Max. cable length: 30 cm unshielded, can be extended up to max. 7.5 m with twisted unshielded cable.
Dimensions: approx. 40x30.5x12.5 mm (LxWxH)



SpaceLogic KNX Binary input REG-K/4x10



Version	Art. no.
light grey	**MTN644492**

For connecting four conventional push-buttons or floating contacts to the KNX. Internally generates a signal voltage SELV, electrically isolated from the bus.
With integrated bus coupler and plug-in screw terminals.
The input voltage level is displayed at each input with a yellow LED. A green LED indicates that the device is ready for operation once the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming or blind control via 1 or 2 inputs. Positioning values for blind control (8-bit). Pulse edges with 1-, 2-, 4-, or 8-bit telegrams. Differentiation between short/long operation. Initialisation telegram. Cyclical sending. Pulse edges with 2-byte telegrams. 8-bit linear regulator. Disable function. Break/make contact. Debounce time.
Inputs: 4
Contact voltage: max. 10 V, clocked
Contact current: max. 2 mA, pulsing
Cable length: max. 50 m
Device width: 2.5 modules = approx. 45 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Binary input REG-K/8x10



Version	Art. no.
light grey	**MTN644592**

For connecting eight conventional push-buttons or floating contacts to the KNX. Internally generates a signal voltage SELV, electrically isolated from the bus.
With integrated bus coupler and plug-in screw terminals.
The input voltage level is displayed at each input with a yellow LED. A green LED indicates that the device is ready for operation once the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming or blind control via 1 or 2 inputs. Positioning values for blind control (8-bit). Pulse edges with 1-, 2-, 4-, or 8-bit telegrams. Differentiation between short/long operation. Initialisation telegram. Cyclical sending. Pulse edges with 2-byte telegrams. 8-bit linear regulator. Disable function. Break/make contact. Debounce time.
Inputs: 8
Contact voltage: max. 10 V, clocked
Contact current: max. 2 mA, pulsing
Cable length: max. 50 m
Device width: 4 modules = approx. 70 mm
Contents: With bus connecting terminal and cable cover.

Binary Inputs



SpaceLogic KNX Binary input REG-K/4x24



Version	Art. no.
light grey	**MTN644892**

For connecting four conventional devices with AC/DC 24 V outputs to the KNX.
With integrated bus coupler and plug-in screw terminals.
The input voltage level is displayed at each input with a yellow LED. A green LED indicates that the device is ready for operation once the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming or blind control via 1 or 2 inputs. Positioning values for blind control (8-bit). Pulse edges with 1-, 2-, 4-, or 8-bit telegrams. Differentiation between short/long operation. Initialisation telegram. Cyclical sending. Pulse edges with 2-byte telegrams. 8-bit linear regulator. Disable function. Break/make contact. Debounce time.
Input voltage: AC / DC 24 V
Inputs: 4
Input current: DC 15 mA (30 V),
AC 6 mA (27 V)
0 signal: ≤ 5 V
1 signal: ≥ 11 V
Cable length: max. 100 m
Device width: 2.5 modules = approx. 45 mm
Accessories: SpaceLogic KNX Power supply REG, 24 V DC / 0.4 A MTN693003, SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Binary input REG-K/8x24



Version	Art. no.
light grey	**MTN644792**

For connecting 8 conventional devices with AC/DC 24 V outputs to KNX.
With integrated bus coupler and plug-in screw terminals.
The input voltage level is displayed at each input with a yellow LED. A green LED indicates that the device is ready for operation once the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming or blind control via 1 or 2 inputs. Positioning values for blind control (8-bit). Pulse edges with 1-, 2-, 4-, or 8-bit telegrams. Differentiation between short/long operation. Initialisation telegram. Cyclical sending. Pulse edges with 2-byte telegrams. 8-bit linear regulator. Disable function. Break/make contact. Debounce time.
Input voltage: AC/DC 24V
Inputs: 8
Input current: DC approx. 15 mA/AC approx. 6 mA
Line length: max. 100 m
Device width: 4 modules = approx. 72 mm
Accessories: SpaceLogic KNX Power supply REG, 24 V DC / 0.4 A MTN693003, SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Contents: With bus connecting terminal and cable cover.

Binary Inputs



SpaceLogic KNX Binary input REG-K/4x230



Version	Art. no.
light grey	**MTN644992**

For connecting four conventional devices with AC 230 V outputs to the KNX.
With integrated bus coupler and plug-in screw terminals.
The input voltage level is displayed at each input with a yellow LED. A green LED indicates that the device is ready for operation once the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming or blind control via 1 or 2 inputs. Positioning values for blind control (8-bit). Pulse edges with 1-, 2-, 4-, or 8-bit telegrams. Differentiation between short/long operation. Initialisation telegram. Cyclical sending. Pulse edges with 2-byte telegrams. 8-bit linear regulator. Disable function. Break/make contact. Debounce time.
Input voltage: AC 230 V, 50-60Hz
Inputs: 4
Input current: AC 12 mA
0 signal: ≤ 40 V
1 signal: ≥ 160 V
Cable length: max. 100 m
Device width: 2.5 modules = approx. 45 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Binary input REG-K/8x230



Version	Art. no.
light grey	**MTN644692**

For connecting eight conventional devices with AC 230 V outputs to the KNX.
With integrated bus coupler and plug-in screw terminals.
The input voltage level is displayed at each input with a yellow LED. A green LED indicates that the device is ready for operation once the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming or blind control via 1 or 2 inputs. Positioning values for blind control (8-bit). Pulse edges with 1-, 2-, 4-, or 8-bit telegrams. Differentiation between short/long operation. Initialisation telegram. Cyclical sending. Pulse edges with 2-byte telegrams. 8-bit linear regulator. Disable function. Break/make contact. Debounce time.
Input voltage: AC 230V, 50-60Hz
Inputs: 8
Input current: AC approx. 7 mA
Line length: max. 100 m
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

Movement/Presence Detectors Overview

	KNX ARGUS Presence Basic	KNX ARGUS Presence	KNX ARGUS Presence with light control and IR receiver		KNX Presence detector DI	KNX ARGUS Presence 180/2,20 m, flush-mounted	KNX ARGUS 180/2,20 m, flush-mounted	KNX ARGUS 180, flush-mounted	KNX ARGUS 220
									
Article number	**MTN6307..**	**MTN6308..**	**MTN6309..**		**MTN6300-0019**	**MTN6304.., MTN6306..**	**MTN6317.., MTN6327..**	**MTN6316.., MTN6326..**	**MTN6325..**
Design	—	—	—		—	System M **MTN6302-60..** System D	System M	System M	—
Use cases (examples)	Offices, waiting rooms Lighting, heating control	Large offices, waiting rooms, classrooms, private areas, public buildings Lighting, blinds, heating control	Large offices, waiting rooms, classrooms, private areas, public buildings Lighting, blinds, heating control, constant light control		Offices, waiting rooms, corridors Lighting control	Large offices, waiting rooms, classrooms, private areas, public buildings Lighting, blinds, heating control	Corridors, private areas, public buildings Lighting, blinds, heating control	Corridors, private areas, public areas with limited access Lighting, blinds, heating control	Entrance areas, patios, garages, large-scale indoor areas where devices with a protection type higher IP20 are required (working rooms, wellness centres, ...) Lighting
Installation site	Ceiling mounting, indoor	Ceiling mounting, indoor	Ceiling mounting, indoor		False ceiling mounting, indoor	Flush mounting, indoor	Flush mounting, indoor	Flush mounting, indoor	Surface mounting, outdoor, indoor
Protection type	IP 20	IP 20	IP 20		IP 20	IP 20	IP 20	IP 20	IP 55
Recomended mounting height	2.5 m	2.5 m	2.5 m		2.5 m	2.2 m oder 1.1 m (halved range)	2.2 m oder 1.1 m (halved range)	1.10 m	2.5 m
Angle of detection	360°	360°	360°		360°	180°	180°	180°	220°, adjustable lense
Range (right, left / front)	7 m radius	7 m radius	7 m radius		4.5 m radius	8 m right/left, 12 m to the front	8 m right/left, 12 m to the front	8 m radius	14 m right/left, 16 m to the front
Number of levels	6	6	6		3	6	6	1	7
Number of zones	136	136	136		39	46	46	14	112
Number of switching segments	544	544	544		167	—	—	—	448
Number of movement sensors	4	4	4		2	2	2	1	1
Light sensor	10-2000 Lux	10-2000 Lux	10-2000 Lux		10-2000 Lux	10-2000 Lux	10-2000 Lux	10-2000 Lux	3-2000 Lux
Staircase timer adjustable on the device	—	—	—		—	1 s - 8 min	1 s - 8 min	1 s - 8 min	1 s - 8 min
Staircase timer adjustable in the ETS	1 s - 255 h	1 s - 255 h	1s - 255 h		3 s, 1 min - 255 min	1 s - 255 h	1 s - 255 h	1 s - 255 h	1 s - 255 h
Software									
Light regulation for a permanent desired brightness	—	—	■		—	—	—	—	—
Number of movement/presence blocks	2	5	5+1 (1 for light control)		2	5	5	5	5
Number of functions per block	4	4	4		1	4	4	4	4
Functions per block ■ Output telegrams 1 bit, 1 byte, 2 byte ■ Staircase timer ■ Self-adjusting staircase timer ■ Sensitivity adjustable ■ Range adjustable ■ Brightness treshold ■ Locking function ■ Sensitivity and range of the movement sensors sector-specifically adjustable	 ■ ■ ■ ■ ■ ■ ■ —	 ■ ■ ■ ■ ■ ■ ■ ■	 ■ ■ ■ ■ ■ ■ ■ ■		 ■ ■ — ■ — ■ ■ —	 ■ ■ ■ ■ ■ ■ ■ ■ ■	 ■ ■ ■ ■ ■ ■ ■ ■ ■	 ■ ■ ■ ■ ■ ■ ■ ■ —	 ■ ■ ■ ■ ■ ■ ■ ■ —
Brightness value correction	—	■	■		—	■	■	■	—
Cyclical sending of the determined brightness value	■	■	■		■	■	—	—	—
Cyclical sending of brightness value via 2 bytes object	■	■	■		■	■	■	■	■
Brightness threshold adjustable via object	—	■	■		■	■	—	—	—
Primary/Secondary function	—	■	■		■	■	■	■	■
Monitoring function (cyclical sending)	—	■	■		—	■	■	■	■
Dead time adjustable (noise reduction)	—	—	—		—	—	■	■	■
IR receiver up to 10 channels ■ IR functions with KNX telegrams ■ Configuration of brightness treshold, staircase timer and range	 — —	 — —	 ■ ■		 — —	 — —	 — —	 — —	 — —

SpaceLogic KNX

Movement/Presence Detectors Overview

Movement/Presence Detectors Overview

	KNX Movement detector 180			KNX Movement detector 180		KNX Movement detector 180
						
Article number	**MGU3.533.18/25**	**MGU5.533.18/25**		**MGU3.533.30/12**	**MGU5.533.30/12**	**ALB45153, ALB46153**
Design	Unica			Unica Top		Altira
Use cases (examples)	Corridors, private areas, public areas with limited access Lighting, blinds, heating control			Corridors, private areas, public areas with limited access Lighting, blinds, heating control		Corridors, private areas, public areas with limited access Lighting, blinds, heating control
Installation site	Flush mounting, indoor			Flush mounting, indoor		Flush mounting, indoor
Protection type	IP 20			IP 20		IP 20
Recomended mounting height	1.10 m			1.10 m		1.10 m
Angle of detection	180°			180°		180°
Range (right, left / front)	8 m Radius			8 m Radius		8 m radius
Number of levels	1			1		1
Number of zones	14			14		14
Number of switching segments	—			—		—
Number of movement sensors	1			1		1
Light sensor	10-2000 Lux			10-2000 Lux		10-2000 Lux
Staircase timer adjustable on the device	1 s - 8 min			1 s - 8 min		1 s - 8 min
Staircase timer adjustable in the ETS	1 s - 255 h			1 s - 255 h		1 s - 255 h
Software						
Light regulation for a permanent desired brightness	—			—		—
Number of movement/presence blocks	5			5		5
Number of functions per block	4			4		4
Functions per block ■ Output telegrams 1 bit, 1 byte, 2 byte ■ Staircase timer ■ Self-adjusting staircase timer ■ Sensitivity adjustable ■ Range adjustable ■ Brightness treshold ■ Locking function ■ Sensitivity and range of the movement sensors sector-specifically adjustable	 ■ ■ ■ ■ ■ ■ ■ —			 ■ ■ ■ ■ ■ ■ ■ —		 ■ ■ ■ ■ ■ ■ ■ —
Brightness value correction	■			■		■
Cyclical sending of the determined brightness value	—			—		—
Cyclical sending of brightness value via 2 bytes object	■			■		■
Brightness threshold adjustable via object	—			—		—
Master/Slave function	■			■		■
Monitoring function (cyclical sending)	■			■		■
Dead time adjustable (noise reduction)	■			■		■
IR receiver up to 10 channels ■ IR functions with KNX telegrams ■ Configuration of brightness treshold, staircase timer and range	 — —			 — —		 — —

SpaceLogic KNX

Movement/Presence Detectors Overview

Movement detectors



KNX ARGUS 220



Version	Art. no.
polar white	**MTN632519**
dark brazil	**MTN632515**
aluminium	**MTN632569**

KNX movement detector for outdoors. 220° surface monitoring for large house fronts and sections of the house. With integrated bus coupler. The physical address is programmed with a magnet.
- 360° short-range zone (approx. 4 m radius).
- Large wiring compartment and plug system.
- Looping is possible.
- LED function display for fast alignment at the installation site.
- Operating elements are protected under the easily accessible cover plate.
- Flexibly adjustable sensor head.
- Possible to blank out individual lens areas.

Can be installed on walls and ceilings without additional accessories. Can be mounted on inner/outer corners and stationary pipes using a mounting bracket.
KNX software functions: Five movement blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation, master, slave, safety pause, disable function. Sensitivity, brightness and staircase timer can be set using the ETS or the potentiometer. Self-adjusting staircase timer.
Angle of detection: 220°
Range: max. 16 m
Number of levels: 7
Number of zones: 112 with 448 switching segments
Light sensor: infinitely variable from approx. 3 - 1000 lux, ∞ lux (infinite: movement detection is independent of the position of the sensor head)
Time: can be set externally from 1 s to approx. 8 min. in 6 levels or via ETS from approx. 3 s to approx. 152 hours
Sensitivity: infinitely adjustable
Possible settings for sensor head:
Wall mounting: 9° up, 24° down, 12° left/right, ±12° axial
Ceiling mounting: 4° up, 29° down, 25° left/right, ±8.5° axial
EC directives: Low-voltage guideline 2006/95/EC and EMC directive 2004/108/EC
Type of protection: IP 55
Accessories: Mounting bracket MTN565291, Programming magnet MTN639190
Contents: With cover plate and segments to limit the area of detection, screws and plugs.




Programming magnet



Version	Art. no.
	MTN639190

Non-contact programming of the physical address of the KNX ARGUS 220.
In KNX, to be completed with: KNX ARGUS 220 MTN6325..

Movement detectors System M





KNX ARGUS 180, flush-mounted



Discontinued **July 2022**

Version	Art. no.
white, glossy	**MTN631644**
polar white, glossy	**MTN631619**
active white, glossy	**MTN631625**
anthracite	**MTN632614**
aluminium	**MTN632660**

For System M.
Movement detector for indoors.
When a movement is detected, a data telegram defined by the programming is transmitted.
With integrated bus coupling unit.
KNX software functions: Five movement blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation, master, slave, safety pause, disable function. Sensitivity, brightness and staircase timer can be set using the ETS or the potentiometer. Self-adjusting staircase timer.
Angle of detection: 180°
Range: 8 m (for mounting height of 1.1 m)
Number of levels: 1
Number of zones: 14
Sensitivity: infinitely adjustable (ETS or potentiometer)
Light sensor: infinitely adjustable from approx. 10 to 2000 Lux (ETS or potentiometer)
Time: adjustable in steps from 1 s to 8 min (potentiometer) or adjustable from 1 s to 255 hours (ETS)
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Contents: With bus connecting terminal and supporting plate.

KNX ARGUS 180/2.20 m flush-mounted



Version	Art. no.
white, glossy	**MTN631744**
polar white, glossy	**MTN631719**
active white, glossy	**MTN631725**
anthracite	**MTN632714**
aluminium	**MTN632760**

For System M.
Indoor movement detector with anti-crawl protection.
When a movement is detected, a data telegram defined by the programming is transmitted.
With integrated bus coupling unit. For wall mounting in a size 60 mounting box, optimal installation at 2.2 m.
KNX software functions: Five movement blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation, master, slave, safety pause, disable function. Sensitivity, brightness and staircase timer can be set using the ETS or the potentiometer. Two movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer.
Angle of detection: 180°
Range: 8 m right/left, 12 m to the front (for a mounting height of 2.20 m)
Mounting height: 2.2 m or 1.1 m with half the range
Number of levels: 6
Number of zones: 46
Number of movement sensors: 2, sector-orientated, adjustable
Sensitivity: infinitely adjustable (ETS or potentiometer)
Light sensor: infinitely adjustable from approx. 10 to 2000 Lux (ETS or potentiometer)
Time: adjustable in steps from 1 s to 8 min (potentiometer) or adjustable from 1 s to 255 hours (ETS)
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Contents: With bus connecting terminal and supporting plate.
With cover segments to limit the area of detection.

Movement detectors System D



KNX ARGUS Presence 180/2.20 m flush-mounted



Version	Art. no.
Thermoplastic	
lotus white	**MTN6302-6035**
anthracite	**MTN6302-6034**
sahara	**MTN6302-6033**
stainless steel	**MTN6302-6036**
nickel metallic	**MTN6302-6050**
champagne metallic	**MTN6302-6051**
mocca metallic	**MTN6302-6052**

For System D.
Presence detection indoors.
If KNX ARGUS Presence detects smaller movements in the room, data telegrams are transmitted via KNX to control the lighting, blind or heating at the same time.
When the lighting is controlled by brightness-dependent movement detection, the device constantly monitors the brightness in the room. If sufficient natural light is at hand, the device switches the artificial light off even if a person is present. The overshoot time can be adjusted using the ETS.
With integrated bus coupling unit. For wall mounting in a size 60 mounting box, optimal installation at 2.2 m. With anti-crawl protection.
KNX software functions: Five movement/presence blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation, master, slave, monitoring, safety pause, disable function. Two movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer. Actual brightness value: can be detected via the internal and/or an external light sensor. Actual value correction.
Angle of detection: 180°
Range: 8 m right/left, 12 m to the front (for a mounting height of 2.20 m)
Mounting height: 2.2 m or 1.1 m at half the range
Time: adjustable in steps from 1 s to 8 min (potentiometer) or adjustable from 1 s to 255 hours (ETS)
Number of levels: 6
Number of zones: 46
Number of movement sensors: 2, separately adjustable
Light sensor: internal light sensor infinitely adjustable from approx. 10 to 2000 Lux (ETS); external light sensor via KNX
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Accessories: Fixing frame for 3-module box MTN6270-0015
D-Life frame, 1-gang, for 3-module box MTN6010-65xx
Contents: With bus connecting terminal and supporting plate.
With cover segments to limit the area of detection.

SpaceLogic KNX

Movement Detectors

Movement detectors Altira



KNX Movement detector 180



Version	Art. no.
white	**ALB45153**
aluminium	**ALB46153**

2 modules
Movement detector for indoors.
When a movement is detected, a data telegram defined by the programming is transmitted.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Five movement blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation and surveillance operation, master, slave, safety pause, disable function. Sensitivity, brightness and staircase timer can be set using the ETS or the potentiometer. Two movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer.
Angle of detection: 180°
Number of movement sensors: 2, sector-orientated, adjustable (ETS)
Recommended mounting height: 1 m to 2,5 m
Range: at 2.15 m mounting height: Approx. 9 m on all sides, adjustable in 10 steps (rotary switch or ETS)
Detection brightness: Infinite setting from approx. 10 lux to approx.1000 lux (rotary switch) or from 10 lux to 2000 lux (ETS)
Overshoot time: Adjustable in 6 steps from approx. 1 s to approx. 8 min (rotary switch) or adjustable from 1 s to 255 hours (ETS)
EC guidelines: Low-voltage guideline 2006/95/EEC and EMC guideline 2004/108/EC
Contents: With bus connecting terminal.

Movement detectors Unica



KNX Movement detector 180



Version	Art. no.
white	**MGU3.533.18**
ivory	**MGU3.533.25**

2 modules
In Unica design.
Movement detector for indoors.
When a movement is detected, a data telegram defined by the programming is transmitted.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Five movement blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation and surveillance operation, master, slave, safety pause, disable function. Sensitivity, brightness and staircase timer can be set using the ETS or the potentiometer. Two movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer.
Angle of detection: 180°
Number of movement sensors: 2, sector-orientated, adjustable (ETS)
Recommended mounting height: 1 m to 2,5 m
Range: at 2.15 m mounting height: Approx. 9 m on all sides, adjustable in 10 steps (rotary switch or ETS)
Detection brightness: Infinite setting from approx. 10 lux to approx.1000 lux (rotary switch) or from 10 lux to 2000 lux (ETS)
Overshoot time: Adjustable in 6 steps from approx. 1 s to approx. 8 min (rotary switch) or adjustable from 1 s to 255 hours (ETS)
EC guidelines: Low-voltage guideline 2006/95/EEC and EMC guideline 2004/108/EC
Contents: With bus connecting terminal.

Movement Detectors

Movement detectors Unica Top



KNX Movement detector 180



Version	Art. no.
aluminium	**MGU3.533.30**
graphite	**MGU3.533.12**

2 modules
In Unica Top design.
Movement detector for indoors.
When a movement is detected, a data telegram defined by the programming is transmitted.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions: Five movement blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation and surveillance operation, master, slave, safety pause, disable function. Sensitivity, brightness and staircase timer can be set using the ETS or the potentiometer. Two movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer.
Angle of detection: 180°
Number of movement sensors: 2, sector-orientated, adjustable (ETS)
Recommended mounting height: 1 m to 2,5 m
Range: at 2.15 m mounting height: Approx. 9 m on all sides, adjustable in 10 steps (rotary switch or ETS)
Detection brightness: Infinite setting from approx. 10 lux to approx.1000 lux (rotary switch) or from 10 lux to 2000 lux (ETS)
Overshoot time: Adjustable in 6 steps from approx. 1 s to approx. 8 min (rotary switch) or adjustable from 1 s to 255 hours (ETS)
EC guidelines: Low-voltage guideline 2006/95/EEC and EMC guideline 2004/108/EC
Contents: With bus connecting terminal.

Presence Detectors

KNX presence detector



SpaceLogic KNX Presence detector DI



Version	Art. no.
white	**MTN6300-0019**

For the Gulf market.
KNX presence detector for installation in false ceilings. The device detects the presence of persons even with small movements and is used to control 2 channels.
With 2 input channels for connecting push-buttons with which the lighting can be switched on/off or dimmed. The presence detector can be used as a single detector or in primary/secondary mode.
The detector is mounted with a retaining spring in a round aperture (diameter 68 mm) in a suspended ceiling (e.g. plasterboard). The minimum installation depth is 67 mm.

Functions of the KNX software:
Primary/secondary mode: in secondary mode, the detector is used only for motion detection. In primary mode the detector can be set in Auto mode, Semi-auto mode or Test mode.
Auto mode (presence): during the delay time, if the ambient brightness is higher than the set lux value for 5 minutes, the load will be switched off regardless of motion detection.
Semi-auto mode: An initial press on a push-button is required to switch on the load.
Test mode: fix delay time of 3 seconds for each movement detection.

Supply voltage: KNX bus voltage
Bus current: approx. 10 mA
Number of channels: 2
Binary inputs: 2, cable length max. 100 m, cross section 1.0-2.5 mm²
Mounting height: 2 m ... 3 m (optimal 2.5 m)
Detection range: 360°, Ø 9 m at 2.5 m mounting height
Function modes: Auto (presence), semi auto (absence), test
Sensitivity: adjustable
Detection brightness: 10 ... 2000 Lux
Time setting: 3 s, 1 min - 255 min
Protection type: IP20
Dimensions: 99.2 x 74.1 mm (Ø x H)

Presence Detectors



KNX High Bay presence detector FM



Version	Art. no.
white	**MTN6304-0019**

KNX presence detector for flush-mounted installation in rooms with high ceilings, e.g. high-bay warehouses or sports halls.
The presence detector detects the presence of persons even in the case of small movements.
Control of the lighting is carried out dependent on movement (2 channels) or additionally dependent on brightness (1 channel) via KNX telegrams. If there is sufficient daylight, the lighting is switched off or adapted to a detection brightness (constant light regulation).
Devices for heating, ventilation or air conditioning (HVAC) can also be controlled (1 channel).
The presence detector has two detection sensors (passive infrared), a brightness sensor, an IR receiver and an LED to indicate a detected movement, in test mode indication of the activated programming mode.
The presence detector can be used as a single detector or in master-slave mode. The setting is carried out in the ETS.
The presence detector can also be set and tested without the ETS, but with the appropriate remote control (available as an accessory).
Indoor installation on ceiling (IP 20) on flush-mounted housing with two screws.

Optionally, a protective metal basket (available as an accessory) can be installed to protect the lens.
KNX software functions: Movement detection: The detected presence of a person is signalled using a KNX telegram. Lighting control: The room lighting is controlled depending on movement and brightness. If there is sufficient daylight, the lighting is switched off or dimmed to a constant level. Basic lighting: Activates basic lighting after the overtravel time has elapsed, either for a limited time or dependent on the brightness. HVAC control: Devices for heating, ventilation, air conditioning (HVAC) are switched from energy-saving mode to comfort mode dependent on movement. Operating modes: Single detector, Master, Slave, Master in parallel operation. Master: Controls the lighting and HVAC system. Additional detectors as slaves increase the area of detection. Slave: Only detects movement in its area and sends the information to the master. Master in parallel operation: Controls the lighting in its area (can be expanded with additional detectors as slaves). The only master in the installation only controls the HVAC system for the entire area. 2 logic gates
Angle of detection: 360°
Opening angle: 180°
Range: Radius of max. 18 m (tangential)
Mounting height: 4 - 14 m
Optimal mounting height: 12 m
Time setting: 60 s - 255 min.
Sensors: 2 x passive infrared
Number of zones: 1416
Detection brightness: internal light sensor adjustable from approx. 2 to 1000 Lux
IP protection rating: IP 20
EC guidelines: Low voltage directive 2006/95/EC and EMC directive 2004/108/EC
Dimensions: 124 x 78 mm (Ø x H)
Accessories: Remote control for KNX presence detector MTN6300-0002
Protective basket for KNX presence detector MTN6300-0001

Presence Detectors



KNX Corridor presence detector FM



Version	Art. no.
white	**MTN6305-0019**

KNX presence detector for flush-mounted installation in long corridors.
The presence detector detects the presence of persons even in the case of small movements.
Control of the lighting is carried out dependent on movement (2 channels) or additionally dependent on brightness (1 channel) via KNX telegrams. If there is sufficient daylight, the lighting is switched off or adapted to a detection brightness (constant light regulation).
Devices for heating, ventilation or air conditioning (HVAC) can also be controlled (1 channel).
The presence detector has two detection sensors (passive infrared), a brightness sensor, an IR receiver and an LED to indicate a detected movement, in test mode indication of the activated programming mode.
The presence detector can be used as a single detector or in master-slave mode. The setting is carried out in the ETS.
The presence detector can also be set and tested without the ETS, but with the appropriate remote control (available as an accessory).
Indoor installation on ceiling (IP 20) on flush-mounted housing with two screws.

Optionally, a protective metal basket (available as an accessory) can be installed to protect the lens.
KNX software functions: Movement detection: The detected presence of a person is signalled using a KNX telegram. Lighting control: The room lighting is controlled depending on movement and brightness. If there is sufficient daylight, the lighting is switched off or dimmed to a constant level. Basic lighting: Activates basic lighting after the overtravel time has elapsed, either for a limited time or dependent on the brightness. HVAC control: Devices for heating, ventilation, air conditioning (HVAC) are switched from energy-saving mode to comfort mode dependent on movement. Operating modes: Single detector, Master, Slave, Master in parallel operation. Master: Controls the lighting and HVAC system. Additional detectors as slaves increase the area of detection. Slave: Only detects movement in its area and sends the information to the master. Master in parallel operation: Controls the lighting in its area (can be expanded with additional detectors as slaves). The only master in the installation only controls the HVAC system for the entire area. 2 logic gates
Angle of detection: 360°
Opening angle: 45°
Range: max. 20 x 4 m (tangential)
max. 12 x 4 m (radial)
Mounting height: 2.5 - 5 m
Optimal mounting height: 2.8 m
Time setting: 60 s - 255 min.
Sensors: 2 x passive infrared
Number of zones: 280
Detection brightness: internal light sensor adjustable from approx. 2 to 1000 Lux
Protection rating: IP 20
EC Directives: Low voltage directive 2006/95/EC and EMC directive 2004/108/EC
Dimensions: 124 x 78 mm (Ø x H)
Accessories: Remote control for KNX presence detector MTN6300-0002
Protective basket for KNX presence detector MTN6300-0001

Presence Detectors



KNX High Bay presence detector



Version	Art. no.
white	**MTN6354-0019**

KNX presence detector for surface-mounted installation in rooms with high ceilings, e.g. high-bay warehouses or sports halls.
The presence detector detects the presence of persons even in the case of small movements.
Control of the lighting is carried out dependent on movement (2 channels) or additionally dependent on brightness (1 channel) via KNX telegrams. If there is sufficient daylight, the lighting is switched off or adapted to a detection brightness (constant light regulation).
Devices for heating, ventilation or air conditioning (HVAC) can also be controlled (1 channel).
The presence detector has two detection sensors (passive infrared), a brightness sensor, an IR receiver and an LED to indicate a detected movement, in test mode indication of the activated programming mode.
The presence detector can be used as a single detector or in master-slave mode. The setting is carried out in the ETS.
The presence detector can also be set and tested without the ETS, but with the appropriate remote control (available as an accessory).
Indoor installation on ceiling (IP 54) with surface-mounted housing with two screws and plugs.

Optionally, a protective metal basket (available as an accessory) can be installed to protect the lens.
KNX software functions: Movement detection: The detected presence of a person is signalled using a KNX telegram. Lighting control: The room lighting is controlled depending on movement and brightness. If there is sufficient daylight, the lighting is switched off or dimmed to a constant level. Basic lighting: Activates basic lighting after the overtravel time has elapsed, either for a limited time or dependent on the brightness. HVAC control: Devices for heating, ventilation, air conditioning (HVAC) are switched from energy-saving mode to comfort mode dependent on movement. Operating modes: Single detector, Master, Slave, Master in parallel operation. Master: Controls the lighting and HVAC system. Additional detectors as slaves increase the area of detection. Slave: Only detects movement in its area and sends the information to the master. Master in parallel operation: Controls the lighting in its area (can be expanded with additional detectors as slaves). The only master in the installation only controls the HVAC system for the entire area. 2 logic gates
Angle of detection: 360°
Opening angle: 180°
Range: Radius of max. 18 m (tangential)
Mounting height: 4 - 14 m
Optimal mounting height: 12 m
Time setting: 60 s - 255 min.
Sensors: 2 x passive infrared
Number of zones: 1416
Detection brightness: internal light sensor adjustable from approx. 2 to 1000 Lux
Protection rating: IP 54
EC Directives: Low voltage directive 2006/95/EC and EMC directive 2004/108/EC
Dimensions: 124 x 65 mm (Ø x H)
Accessories: Remote control for KNX presence detector MTN6300-0002
Protective basket for KNX presence detector MTN6300-0001

Presence Detectors



KNX Corridor presence detector



Version	Art. no.
white	**MTN6355-0019**

KNX presence detector for surface-mounted installation in long corridors.
The presence detector detects the presence of persons even in the case of small movements.
Control of the lighting is carried out dependent on movement (2 channels) or additionally dependent on brightness (1 channel) via KNX telegrams. If there is sufficient daylight, the lighting is switched off or adapted to a detection brightness (constant light regulation).
Devices for heating, ventilation or air conditioning (HVAC) can also be controlled (1 channel).
The presence detector has two detection sensors (passive infrared), a brightness sensor, an IR receiver and an LED to indicate a detected movement, in test mode indication of the activated programming mode.
The presence detector can be used as a single detector or in master-slave mode. The setting is carried out in the ETS.
The presence detector can also be set and tested without the ETS, but with the appropriate remote control (available as an accessory).
Indoor installation on ceiling (IP 54) with surface-mounted housing with two screws and plugs.

Optionally, a protective metal basket (available as an accessory) can be installed to protect the lens.
KNX software functions: Movement detection: The detected presence of a person is signalled using a KNX telegram. Lighting control: The room lighting is controlled depending on movement and brightness. If there is sufficient daylight, the lighting is switched off or dimmed to a constant level. Basic lighting: Activates basic lighting after the overtravel time has elapsed, either for a limited time or dependent on the brightness. HVAC control: Devices for heating, ventilation, air conditioning (HVAC) are switched from energy-saving mode to comfort mode dependent on movement. Operating modes: Single detector, Master, Slave, Master in parallel operation. Master: Controls the lighting and HVAC system. Additional detectors as slaves increase the area of detection. Slave: Only detects movement in its area and sends the information to the master. Master in parallel operation: Controls the lighting in its area (can be expanded with additional detectors as slaves). The only master in the installation only controls the HVAC system for the entire area. 2 logic gates
Angle of detection: 360°
Opening angle: 45°
Range: max. 20 x 4 m (tangential)
max. 12 x 4 m (radial)
Mounting height: 2.5 - 5 m
Optimal mounting height: 2.8 m
Time setting: 60 s - 255 min.
Sensors: 2 x passive infrared
Number of zones: 280
Detection brightness: internal light sensor adjustable from approx. 2 to 1000 Lux
Protection rating: IP 54
EC Directives: Low voltage directive 2006/95/EC and EMC directive 2004/108/EC
Dimensions: 124 x 65 mm (Ø x H)
Accessories: Remote control for KNX presence detector MTN6300-0002
Protective basket for KNX presence detector MTN6300-0001



KNX Mini presence detector



Version	Art. no.
white	**MTN6303-0019**

KNX presence detector for inconspicuous installation in suspended ceilings.
The presence detector detects the presence of persons even in the case of small movements. Control of the lighting is carried out dependent on movement (4 channels) or additionally dependent on brightness (1 channel) via KNX telegrams. If there is sufficient daylight, the lighting is switched off or adapted to a detection brightness (constant light regulation).
Devices for heating, ventilation or air conditioning (HVAC) can also be controlled (1 channel).
The presence detector has four detection sensors (passive infrared), a brightness sensor, an IR receiver and an LED to indicate a detected movement, in test mode indication of the activated programming mode.
The presence detector can be used as a single detector or in master-slave mode. The setting is carried out in the ETS.
The presence detector can also be set and tested without the ETS, but with the appropriate remote control (available as an accessory).
Indoor installation in suspended ceilings The detector is installed with a retainer spring in a circular aperture (diameter 35 mm) in a suspended ceiling (e.g. plasterboard). The minimum installation depth is 65 mm.
KNX software functions: Movement detection: The detected presence of a person is signalled using a KNX telegram. Lighting control: The room lighting is controlled depending on movement and brightness. If there is sufficient daylight, the lighting is switched off or dimmed to a constant level. Basic lighting: Activates basic lighting after the overtravel time has elapsed, either for a limited time or dependent on the brightness. HVAC control: Devices for heating, ventilation, air conditioning (HVAC) are switched from energy-saving mode to comfort mode dependent on movement. Operating modes: Single detector, Master, Slave, Master in parallel operation. Master: Controls the lighting and HVAC system. Additional detectors as slaves increase the area of detection. Slave: Only detects movement in its area and sends the information to the master. Master in parallel operation: Controls the lighting in its area (can be expanded with additional detectors as slaves). The only master in the installation only controls the HVAC system for the entire area. 2 logic gates
Angle of detection: 360°
Range: max. 6 x 6 m (tangential)
max. 4 x 4 m (radial)
Mounting height: 2 - 5 m
Optimal mounting height: 2.8 m
Time setting: 60 s - 255 min.
Sensors: 4 x passive infrared
Detection brightness: internal light sensor adjustable from approx. 2 to 1000 Lux
IP protection rating: IP 20
EC guidelines: Low voltage directive 2006/95/EC and EMC directive 2004/108/EC
Dimensions: 43 x 71 mm (Ø x H)
Accessories: Remote control for KNX presence detector MTN6300-0002





Remote control for KNX presence detector



Version	Art. no.
	MTN6300-0002

IR remote control for operating and setting KNX presence detectors.
The IR remote control can be used to carry out the following functions and settings:
- Activation of KNX programming mode
- Selecting test modes
- Starting and ending test mode
- Calibrating brightness measurement
- Setting the brightness value
- Setting the lighting overtravel time
- Setting switch-on delay for HVAC
- Setting the basic lighting duration

To be completed with: KNX High Bay presence detector FM
KNX Präsenz Halle AP MTN6354-0019
KNX Corridor presence detector FM MTN6305-0019
KNX Präsenz Korridor AP MTN6355-0019
KNX Mini presence detector
MTN6303-0019

Protective basket for KNX presence detector



Version	Art. no.
	MTN6300-0001

Protective grille for movement and presence detectors.
Surface-mounted installation with screws
To be completed with: KNX High Bay presence detector FM
KNX Präsenz Halle AP MTN6354-0019
KNX Corridor presence detector FM MTN6305-0019
KNX Präsenz Korridor AP MTN6355-0019

Presence Detectors





KNX ARGUS Presence Basic



Version	Art. no.
polar white	**MTN630719**
aluminium	**MTN630760**

Presence detection indoors.
If KNX ARGUS Presence detects smaller movements in the room, data telegrams are transmitted via KNX to control the lighting, blind or heating at the same time.
When the lighting is controlled by brightness-dependent movement detection, the device constantly monitors the brightness in the room. If sufficient natural light is at hand, the device switches the artificial light off even if a person is present. The overshoot time can be adjusted using the ETS.
With integrated bus coupling unit. For ceiling mounting in a size 60 mounting box, optimal installation at 2.5 m. Can also be mounted to ceilings using the surface mounting housing for ARGUS Presence.
KNX software functions: Two movement/presence blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation (no master/slave), safety pause, disable function. Self-adjusting staircase timer. Actual brightness value: can be specified via the internal and/or an external light sensor.
Angle of detection: 360°
Range: a radius of max. 7 m (at a mounting height of 2.50 m)
Number of levels: 6
Number of zones: 136 with 544 switching segments
Number of movement sensors: 4
Light sensor: internal light sensor infinitely adjustable from approx. 10 to 2000 Lux (ETS); external light sensor via KNX
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Accessories: Surface-mounted housing for ARGUS Presence MTN550619
Contents: With bus connecting terminal and supporting plate.

KNX ARGUS Presence



Version	Art. no.
aluminium	**MTN630860**
polar white	**MTN630819**

Presence detection indoors.
If KNX ARGUS Presence detects smaller movements in the room, data telegrams are transmitted via KNX to control the lighting, blind or heating at the same time.
When the lighting is controlled by brightness-dependent movement detection, the device constantly monitors the brightness in the room. If sufficient natural light is at hand, the device switches the artificial light off even if a person is present. The overshoot time can be adjusted using the ETS.
With integrated bus coupling unit. For ceiling mounting in a size 60 mounting box, optimal installation at 2.5 m. Can also be mounted to ceilings using the surface mounting housing for ARGUS Presence.
KNX software functions: Five movement/presence blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation, master, slave, monitoring, safety pause, disable function. Four movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer. Actual brightness value: can be detected via the internal and/or an external light sensor. Actual value correction.
Angle of detection: 360°
Range: a radius of max. 7 m (at a mounting height of 2.50 m)
Number of levels: 6
Number of zones: 136 with 544 switching segments
Number of movement sensors: 4, separately adjustable
Light sensor: internal light sensor infinitely adjustable from approx. 10 to 2000 Lux (ETS); external light sensor via KNX
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Accessories: Surface-mounted housing for ARGUS Presence MTN550619
Contents: With bus connecting terminal and supporting plate.

Presence Detectors



KNX ARGUS Presence with light control and IR receiver



Version	Art. no.
polar white	**MTN630919**
aluminium	**MTN630960**

Presence detection indoors.
If KNX ARGUS Presence detects smaller movements in the room, data telegrams are transmitted via KNX to control the lighting, blind or heating at the same time.
When the lighting is controlled by brightness-dependent movement detection, the device constantly monitors the brightness in the room. If sufficient natural light is at hand, the device switches the artificial light off even if a person is present. The overshoot time can be adjusted using the ETS.
Light control enables the required brightness in a room to be achieved permanently. Dimming and the optional use of a second lighting group maintains a constant brightness.
Individual ARGUS Presence configurations can be changed or other KNX devices can be controlled remotely using the IR receiver.
With integrated bus coupling unit. For ceiling mounting in a size 60 mounting box, optimal installation at 2.5 m. Can also be mounted to ceilings using the surface mounting housing for ARGUS Presence.
KNX software functions: Five movement/presence blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
An additional light control block: brightness can be maintained constant by dimming and an additional adjustable level.
IR receiver function. IR configuration: setting the brightness threshold, staircase timer factors or range.
Normal operation, master, slave, monitoring, safety pause, disable function. Four movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer. Actual brightness value: can be detected via the internal and/or an external light sensor. Actual value correction.
Angle of detection: 360°
Range: a radius of max. 7 m (at a mounting height of 2.50 m)
Number of levels: 6
Number of zones: 136 with 544 switching segments
Number of movement sensors: 4, separately adjustable
Light sensor: internal light sensor infinitely adjustable from approx. 10 to 2000 Lux (ETS); external light sensor via KNX
Number of IR channels: 10 for controlling KNX devices, 10 for configuration
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Accessories: Surface-mounted housing for ARGUS Presence MTN550619
Transmitter: IR universal remote control MTN5761-0000
Contents: With bus connecting terminal and supporting plate.



Surface-mounted housing for ARGUS Presence



Version	Art. no.
polar white	**MTN550619**

The surface-mounted housing for ARGUS Presence devices also allows them to be surface mounted.
- for surface-mounting of the LON Multi-Sensor LA-21 (art. no. 42320-104) and ILA-22 (art. no. 42320-105)
- colour: polar white (similar to RAL 9010)

To be completed with: ARGUS Presence MTN550590, ARGUS Presence with IR receiver and for extension unit operation MTN550591, KNX ARGUS Presence Basic MTN6307.., KNX ARGUS Presence MTN6308.., KNX ARGUS Presence with light control and IR receiver MTN6309..

Presence Detectors



KNX ARGUS Presence 180/2.20 m flush-mounted



Version		Art. no.
	white, glossy	**MTN630444**
☐	polar white, glossy	**MTN630419**
☐	active white, glossy	**MTN630425**
■	anthracite	**MTN630614**
■	aluminium	**MTN630660**

For System M.
Presence detection indoors.
If KNX ARGUS Presence detects smaller movements in the room, data telegrams are transmitted via KNX to control the lighting, blind or heating at the same time.
When the lighting is controlled by brightness-dependent movement detection, the device constantly monitors the brightness in the room. If sufficient natural light is at hand, the device switches the artificial light off even if a person is present. The overshoot time can be adjusted using the ETS.
With integrated bus coupling unit. For wall mounting in a size 60 mounting box, optimal installation at 2.2 m. With anti-crawl protection.
KNX software functions: Five movement/presence blocks: up to four functions can be triggered per block. Telegrams: 1 bit, 1 byte, 2 bytes.
Normal operation, master, slave, monitoring, safety pause, disable function. Two movement sensors: the sensitivity and range can be set separately for each sensor. Self-adjusting staircase timer. Actual brightness value: can be detected via the internal and/or an external light sensor. Actual value correction.
Angle of detection: 180°
Range: 8 m right/left, 12 m to the front (for a mounting height of 2.20 m)
Mounting height: 2.2 m or 1.1 m at half the range
Time: adjustable in steps from 1 s to 8 min (potentiometer) or adjustable from 1 s to 255 hours (ETS)
Number of levels: 6
Number of zones: 46
Number of movement sensors: 2, separately adjustable
Light sensor: internal light sensor infinitely adjustable from approx. 10 to 2000 Lux (ETS); external light sensor via KNX
EC Directives: Low-voltage guideline 2006/95/EC and EMC guideline 2004/108/EC
Contents: With bus connecting terminal and supporting plate.
With cover segments to limit the area of detection.

Special Sensors

Other sensors



KNX brightness and temperature sensor



Version	Art. no.
light grey	**MTN663991**

The sensor records brightness and temperature and transmits these values to the bus. It has a temperature sensor and a brightness sensor.
- 3 universal channels for single tasks or logic operations. Temperature and brightness threshold in any combination.
- Sun protection channel for blinds/roller shutter control. Objects for: twilight threshold, brightness threshold, drive control, automatic sun function, teaching, security.
- Automatic sun protection. Controls the blinds automatically during the day.
- Teaching object. With this, every brightness threshold can be reset by the touch of a key.

Suitable for mounting on an outside wall.

With integrated bus coupler. The bus is connected using a bus connecting terminal.
Power consumption: max. 150 mW
Sensors: 2
Temperature measurement range: - 25 °C to + 55 °C (±5 % or ±1 degree)
Brightness measurement range: 1 to 100,000 lux (±20% or ±5 lux)
Type of protection: IP 54 according to DIN EN 60529 for vertical installation with cover
Dimensions: 110 x 72 x 54 mm



Air Quality Multisensor

Version	Art. no.
polar white	**MTN6005-0011**

The multisensor monitors the air quality in rooms e.g. in schools or offices. The measured data is sent for processing via the KNX bus. The sensor provides the following data and controls for KNX: CO_2, relative humidity, temperature, dew point, air pressure, VAV control, temperature controller.
In addition, the sensor has 5 inputs: 2 binary inputs, 1 input can be confiured as a binary or analog input, 2 inputs can be configured as binary or as temperature sensor input (PT1000, 10 kΩ PTC, 2-/10-/12-/15-/33-/47 kΩ NTC).

The device is intended for mounting on a flush-mounted box or on the wall.

Power supply: bus voltage
Current consumption from bus: max. 10 mA
Ambient temperature: 0 °C ... +50 °C
Measuring range, CO2: 390 ... 5000 ppm
Measuring range, temperature: 0 °C ... +50 °C
Measuring range, humidity: 0 % ... 100 %
Measuring range, atmoshperic pressure: 300 hPa ... 1100 hPA
Type of protection: IP 20
Dimensions: 80.5 x 80.5 x 17 mm

Special Sensors



KNX CO_2, humidity and temperature sensor AP



Version	Art. no.
polar white	**MTN6005-0001**

The device is a combined sensor for CO_2, temperature and humidity measurement (relative humidity).
It is used to monitor the air quality in meeting rooms, offices, schools/kindergartens , passive or low-energy houses and living areas without controlled ventilation.
The CO_2 content of the air is a verifiable indicator of the ambient air quality. The higher the CO_2 content, the worse the ambient air is.
KNX software functions: Threshold adjustment range: 500–2550 ppm. Object ""Physical value": 0-9999 ppm. There are 3 independent measured value thresholds for CO_2 and relative humidity and a threshold for the temperature value. An action is carried out if the thresholds are not reached or if they are exceeded: Send priority. Switching, value. Each threshold has a locking object.
Power supply: bus voltage
Current consumption from bus: max. 10 mA
Ambient temperature: -5 °C ... +45 °C
Measuring range, CO2: 300 – 9999 ppm
Measuring range, temperature: 0 °C ... +40 °C
Measuring range, humidity: linear 20 % ... 100 %
Type of protection: IP 20 in accordance with DIN EN 60529
Dimensions: 74x74x31 mm

Special Sensors



KNX weather station Basic V2



Version	Art. no.
	MTN6904-0001

The KNX weather station Basic V2 records weather data, analyses these and can transmit them to the bus. The device has a wind sensor, precipitation sensor, temperature sensor and 3 brightness sensors.
- Self contained outdoor weather station
- For measuring wind, rain, brightness and temperature
- For fully automatic blinds and sun protection control with automatic adjustment of blinds according to position of the sun
- Rain sensor with integrated heating
- The weather station can also be operated without mains supply. The heating of the rain sensor will not function then
- Measurement and evaluation directly on device
- Sun protection for up to three facades via 3 integrated brightness sensors
- 8 sun protection channels
- 4 additional threshold channels for connection of external KNX sensors
- 6 logic channels
- Display of weather data on visualisation

Suitable for mounting on an outside wall or with optional accessories on a corner or on a mast. With integrated bus coupler. The bus is connected using a bus connecting terminal.
An additional AC 230 V power supply is required for the heating unit.

KNX software functions:
- Adjustment of slat position according to current position of the sun.
- Sun protection area both horizontal (azimuth) and vertical (elevation) can be set exactly.
- 3 installed brightness sensors at 90° spacing.
- 2 objects for external brightness sensors.
- Shading can be temporarily interrupted via object.
- Universal channels with AND/OR linking of weather parameters.
- Threshold channels with delay with falling below and exceeding.
- Logic channels with 4 input objects + internal link that can be configured with status of the universal and threshold channels.

Power supply: AC 110-230 V, 50-60 Hz
Power consumption: max. 10 mA with bus voltage
Stand-by consumption: < 0.5 W
Measuring range:
Brightness: 1 - 100000 lx
Temperature: - 30 °C ... + 60 °C
Wind speed: 2 - 30 m/s

Ambient temperature: - 20 °C ... + 55 °C
Protection class: II
Type of protection: IP 44
Dimensions: 227x121x108 mm (LxWxH)
Accessories: Mast and corner fastening for KNX weather station Basic V2 MTN6904-0002



Mast and corner fastening for KNX weather station Basic V2



Version	Art. no.
	MTN6904-0002

- For corner installation of max. 2 KNX weather stations Basic V2.
- For mast installation of 1 KNX weather station Basic V2.
- Diameter 48–60 mm.

To be completed with: KNX weather station Basic V2 MTN6904-0001

Special Sensors



SpaceLogic KNX Weather station REG-K/4-gang



Version	Art. no.
light grey	**MTN682991**

The weather station records and processes analogue sensor signals such as wind speed, brightness, twilight, precipitation and a DCF-77 signal. Up to four analogue sensors and the DCF-77 weather combi-sensor can be connected in any combination.
In connection with the 4-gang analogue input module, 8 analogue inputs are available, to which the connection is made using the sub-bus.
If DCF-77 weather combi-sensors are used, it is possible to access a pre-configured setting in the software.

The measured values are converted by the weather station into 1 byte / 2 byte telegrams (EIS 6/5 value). This enables bus devices (visualisation software, measured value displays) to access the control processes, generate signals or control weather-dependent processes.
Programming is performed using the ETS tool for the weather station.

- Two limit values per sensor (not for rain)
- Connection of multiple wind sensors
- 14 signals can be evaluated
- Evaluation of DCF-77 time signal (date and time)
- Astro function
- Logic operation controller for application of limit-value-dependent actions (even external)
- Shading of individual façade segments
- Signal monitoring of the combi-sensors with object for the following protective measures
- Checking the wind signal for conclusiveness with object for the following protective measures
- Selective façade shading (for 4 façades) with adjustment of the basic brightness, façade alignment, angle of opening relative to the sun.
- External objects for intervention in basic brightness, angle of opening and limit values
- Alarm byte
- Continuity monitoring with report on the bus

For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Auxiliary voltage: AC 24 V (+/-10 %)
Analogue inputs: 4
Current interface: 0 ... 20 mA, 4 ... 20 mA
Voltage interface: 0 ... 1 V, 0 ... 10 V
Outputs: DC 24 V, 100 mA
Device width: 4 modules = approx. 72 mm
In KNX, to be completed with: SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Accessories: Wind sensor with 0-10 V interface MTN663591, Wind sensor with 0-10 V interface and heating MTN663592, Rain sensor MTN663595, Brightness sensor MTN663593, Twilight sensor MTN663594, Temperature sensor MTN663596, Weather combi-sensor MTN6604-0001
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Special Sensors



Weather combi-sensor



Version	Art. no.
black	**MTN6604-0001**

The weather combi-sensor includes a wind sensor, precipitation sensor, twilight sensor and three brightness sensors (East, South, West). With integrated heater (protection against thawing and condensation). Suitable for external installation on a wall or a pole. The sensor is connected to an REG-K 4-gang weather station.
The weather data is evaluated in the weather station. The necessary power supplies are provided by the weather station with connected power supply REG.
Power supply: AC 24 V (+/- 15 %)
Power consumption: min. 600 mA (with heating)
Sensors: 6
Wind speed: 1 ... 40 m/s (≤ 0.5 m/s)
Brightness: 0 ... 110 klux (+/- 10 %)
Twilight 0 ... 250 lux
Type of protection: IP 65 when installed
Temperature range: - 40 °C ... + 60 °C (non-icing)
Fixing method: Mounting bracket
Dimensions: 130x200 mm (ØxH)
In KNX, to be completed with: SpaceLogic KNX Weather station REG-K/4-gang MTN682991



Weather combi-sensor DCF-77

Version	Art. no.	
black	**MTN663692**	**Discontinued**

The weather combi-sensor includes a wind sensor, precipitation sensor, twilight sensor and three brightness sensors (East, South, West). With integral DCF77 receiver, antenna rotatable through 45° and integrated heater (protection against thawing and condensation). Suitable for external installation on a wall or a pole. The sensor is connected to an REG-K 4-gang weather station.
The weather data is evaluated in the weather station. The necessary power supplies are provided by the weather station with connected power supply REG.
Power supply: AC 24 V (+/- 15 %)
Power consumption: max. 600 mA (with heating)
Sensors: 6
Wind speed: 1 ... 40 m/s (≤ 0.5 m/s)
Brightness: 0 ... 110 klux (+/- 10 %)
Twilight 0 ... 250 lux
Type of protection: IP 65 when installed
Temperature range: - 40 °C ... + 60 °C (non-icing)
Fixing method: Mounting bracket
Dimensions: 130x200 mm (ØxH)
In KNX, to be completed with: SpaceLogic KNX Weather station REG-K/4-gang MTN682991

Special Sensors





Wind sensor with 0-10 V interface



IP65

Version	Art. no.
polar white	**MTN663591**

The wind sensor evaluates the wind speed and converts it into an analogue 0-10 V output voltage.
For external installation and connection to the weather station REG-K/4-gang or the analogue input REG-K/4-gang. These two devices provide the supply voltage necessary to operate the sensor.
Measuring range: 0.7 ... 40 m/s, linear
Output: 0 ... 10 V
External power supply:
Voltage: 24 V DC (18-32 V DC)
Power consumption: approx. 12 mA
General specifications:
Type of protection: IP 65
Load: max. 60 m/s transient
Incoming cable: 3 m, LiYY 6 x 0.25 mm²
Fixing method: Mounting bracket
Mounting position: vertical
In KNX, to be completed with:
SpaceLogic KNX Weather station REG-K/4-gang MTN682991,
SpaceLogic KNX Analogue input REG-K 4-gang MTN682191.
Contents: With mounting bracket.

Wind sensor with 0-10 V interface and heating



IP65

Version	Art. no.
polar white	**MTN663592**

The wind sensor evaluates the wind speed and converts it into an analogue 0-10 V output voltage. The integrated heater can be operated via an external power supply of AC 24 V/500 mA for trouble-free operation in frosty weather.
For external installation and connection to the weather station REG-K/4-gang or the analogue input REG-K/4-gang. These two devices provide the supply voltage necessary to operate the sensor.
Measuring range: 0.7 ... 40 m/s, linear
Output: 0 ... 10 V
External power supply:
Voltage: 24 V DC (18-32 V DC)
Power consumption: approx. 12 mA
Heating: 24 V DC/AC PTC element (80° C)
General specifications:
Type of protection: IP 65
Load: max. 60 m/s transient
Incoming cable: 3 m, LiYY 6 x 0.25 mm²
Fixing method: Mounting bracket
Mounting position: vertical
In KNX, to be completed with:
SpaceLogic KNX Weather station REG-K/4-gang MTN682991,
SpaceLogic KNX Analogue input REG-K 4-gang MTN682191.
Accessories: SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Contents: With mounting bracket.

Special Sensors





Rain sensor



IP65

Version	Art. no.
	MTN663595

The rain sensor is used to record and evaluate precipitation and is intended for external mounting. A sensor evaluates the conductivity of the rainwater. The heating is controlled by a microprocessor which supplies an output signal of 0 V or 10 V. The end of the rainfall can be recorded almost immediately with the help of an in-built heater. The heater requires an additional voltage of 24 V AC or DC.
For external installation and connection to the weather station REG-K/4-gang or the analogue input REG-K/4-gang. These two devices provide the supply voltage necessary to operate the sensor.
Output: 0 V dry, 10 V rain
External power supply:
Voltage: 24 V DC (15-30 V DC)
Power consumption: approx. 10 mA (without heating)
Heating: 24 V DC/AC max. 4.5 W
General specifications:
Type of protection: IP 65
Incoming cable: 3 m, UYY 5 x 0.25 mm²
Fixing method: Mounting bracket
Mounting position: approx. 45°
In KNX, to be completed with:
SpaceLogic KNX Weather station REG-K/4-gang MTN682991,
SpaceLogic KNX Analogue input REG-K 4-gang MTN682191.
Accessories: SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Contents: With holder for installing the sensor on walls and masts.

Temperature sensor



IP65

Version	Art. no.
light grey	**MTN663596**

The temperature is measured with the temperature sensor and converted into an analogue output signal of 0-10 V.
For external installation and connection to the weather station REG-K/4-gang or the analogue input REG-K/4-gang. These two devices provide the supply voltage necessary to operate the sensor.
Measuring range: -30° C to +70° C linear
Output: 0 ... 10 V short-circuit-proof
External power supply:
Voltage: 24 V DC (15-30 V DC)
Power consumption: approx. 3 mA
General specifications:
Incoming cable: using PG7 screw fitting
Recommended cable: 3 x 0.25 mm²
Type of protection: IP 65
Dimensions: 58 x 35 x 64 (W x H x D)
In KNX, to be completed with:
SpaceLogic KNX Weather station REG-K/4-gang MTN682991,
SpaceLogic KNX Analogue input REG-K 4-gang MTN682191.





Brightness sensor		Twilight sensor	
 IP65		 IP65	
Version	Art. no.	Version	Art. no.
light grey	**MTN663593**	light grey	**MTN663594**
The brightness sensor is required for recording and evaluating brightness. Brightness is recorded via a photoelectric diode and electronically converted into an analogue output signal of 0 V - 10 V. For external installation and connection to the weather station REG-K/4-gang or the analogue input REG-K/4-gang. These two devices provide the supply voltage necessary to operate the sensor. **Measuring range:** 0 to 60,000 lux, linear **Output:** 0 ... 10 V short-circuit-proof **External power supply:** **Voltage:** 24 V DC (15-30 V DC) **Power consumption:** approx. 5 mA **General specifications:** **Incoming cable:** using PG7 screw fitting **Recommended cable:** 3 x 0.25 mm² **Type of protection:** IP 65 **Dimensions:** 58 x 35 x 64 (W x H x D) **In KNX, to be completed with:** SpaceLogic KNX Weather station REG-K/4-gang MTN682991, SpaceLogic KNX Analogue input REG-K 4-gang MTN682191.		The twilight sensor is required to record and evaluate brightness. Brightness is recorded via a photoelectric diode and electronically converted into an analogue output signal of 0 V - 10 V. For external installation and connection to the weather station REG-K/4-gang or the analogue input REG-K/4-gang. These two devices provide the supply voltage necessary to operate the sensor. **Measuring range:** 0 to 255 lux, linear **Output:** 0 ... 10 V short-circuit-proof **External power supply:** **Voltage:** 24 V DC (15-30 V DC) **Power consumption:** approx. 5 mA **General specifications:** **Incoming cable:** using PG7 screw fitting **Recommended cable:** 3 x 0.25 mm² **Type of protection:** IP 65 **Dimensions:** 58 x 35 x 64 (W x H xD) **In KNX, to be completed with:** SpaceLogic KNX Weather station REG-K/4-gang MTN682991, SpaceLogic KNX Analogue input REG-K 4-gang MTN682191.	



SpaceLogic KNX Analogue input REG-K 4-gang



Version	Art. no.
light grey	**MTN682191**

The analogue input records and processes analogue sensor signals. Up to four analogue sensors can be connected in any combination. In connection with the analogue input module REG/4-gang, 8 analogue inputs are available, to which the connection is made using the sub-bus.
Evaluation and limit value processing is performed in the analogue input. With continuity checking of the 4 ... 20 mA inputs.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Auxiliary voltage: AC 24 V (+/-10 %)
Analogue inputs: 4
Current interface: 0 ... 20 mA, 4 ... 20 mA
Voltage interface: 0 ... 1 V, 0 ... 10 V
Outputs: DC 24 V, 100 mA
Continuity checking: 4 ... 20 mA
Device width: 4 modules = approx. 72 mm
In KNX, to be completed with: SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Accessories: Wind sensor with 0-10 V interface MTN663591, Wind sensor with 0-10 V interface and heating MTN663592, Rain sensor MTN663595, Brightness sensor MTN663593, Twilight sensor MTN663594, Temperature sensor MTN663596
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Special Sensors

Time switch



SpaceLogic KNX Year Time Switch REG-K/8/800



Version	Art. no.
	MTN6606-0008

8-channel KNX time switch with year and astro program. Time switch with connection option for the GNSS antenna. To enable radio-controlled time synchronisation via GPS, the device needs to be fitted with the antenna. Time and date can be issued on the bus.
The device can be programmed manually on the device itself or on the PC using software. After programming on the PC, all switching times are exported to a memory chip available as an accessory, and transmitted from this into one or more time switches.

- Comprehensive annual clock functions
- 8 channels
- 800 memory switching time locations
- 8 years power reserve (lithium battery)
- Text-oriented user interface in the display
- Display lighting (can be switched off)
- Astronomic switch function (automatic calculation of sunrise and sunset times for the whole year)
- Time synchronisation by connecting an external GNSS antenna; additional positioning for astro program
- Time and date synchronisation for other bus devices
- Automatic changeover between summer and winter time
- Switch-off timer
- Holiday program
- 2 random programs
- Integrated operating hours counter
- ON/OFF switching times
- Impulse program
- Cycle program
- Switch preselection
- ON/OFF permanent switching
- PIN coding
- Interface for memory card (PC programming)
- Screwless terminals for 2 lines each

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Operating voltage: Bus: DC 24 V
Mains: AC 110-240 V
Shortest switching time: 1 s
Accuracy: ≤ ±0.5s/day
Power reserve: 8 years
Type of protection: IP 20
Device width: 3 modules = approx. 54 mm
In KNX, to be completed with: GNSS Antenna MTN6606-0073
Accessories: Acti 9 - Programming kit for IHP / IC / KNX Year Time Switch CCT15860, IHP+ and KNX Year Time Switch key CCT15861



GNSS Antenna



Version	Art. no.
	MTN6606-0073

The GNSS antenna is a multi-satellite receiver, which can receive GPS, GALILEO, GLONASS and QZSS (GNSS: global navigation satellite system).
The GNSS antenna is used for worldwide time determination. As every satellite continually transmits UTC time (Greenwich Mean Time) via an atomic clock, it can be received worldwide. The GNSS antenna receives time signals of the above mentioned satellites and forwards them to the time switch. The exact local time is calculated in the time switch according to the set time zone. The GNSS antenna forwards the position coordinates.
The antenna is connected using a 2-core cable (max. 100 m).
In KNX, to be completed with: SpaceLogic KNX Year Time Switch REG-K/8/800 MTN6606-0008

Special Sensors



DCF77 Antenna V2



Version	Art. no.	
	MTN6606-0070	**Discontinued**

Antenna for receiving the time by radio signal. Connect the antenna to the year time switch. To get the best reception, the antenna should not be installed in the cellar or the distribution system. It is connected via a separate 2-core, unshielded power line (max. 100 m), to which up to 5 year time switches can be connected. Incorrect polarity, short circuits and breaks in the antenna cable are each displayed visually.
Type of protection: IP 54
In KNX, to be completed with: SpaceLogic KNX Year Time Switch REG-K/8/800 MTN6606-0008



IHP+ and KNX Year Time Switch key



Version	Art. no.	
	CCT15861	

Memory card for saving and duplicating programs for time switches. The program created by the software is loaded to the memory chip and can then be imported to one or more time switches.
For IHP+ 1c/2c, ICAstro 1c/2c, IC100kp+ 1c/2c, IHP 1c 18 mm, IHP+ 1c 18 mm and KNX Year Time Switch
In KNX, to be completed with: SpaceLogic KNX Year Time Switch REG-K/8/800 MTN6606-0008



Acti 9 - Programming kit for IHP / IC / KNX Year Time Switch



Version	Art. no.	
	CCT15860	

For IC Astro and IC 100kp+.
In KNX, to be completed with: SpaceLogic KNX Year Time Switch REG-K/8/800 MTN6606-0008
Accessories: IHP+ and KNX Year Time Switch key CCT15861
Contents: With adapter, memory chip and 2 m USB cabel.

SpaceLogic KNX

Special Sensors



KNX timer REG-K



Version	Art. no.	
light grey	**MTN677290**	**Discontinued**

The timer sends time and date to the bus and can be operated with or without a DCF77 antenna.
- Automatic changeover between summer and winter time (can be switched off)
- Own adjustable changeover rule
- The data can be sent periodically or on request
- Lithium cell: time stays the same in the event of loss of bus power

For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Accuracy: 1 s/day, the application allows additional adjustment
Reserve power: 10 years
Antenna line length: max. 100 m
Type of protection: IP 20
EC directives: Low-voltage guideline 2006/95/EC and EMC directive 2004/108/EC
Device width: 2 modules = approx. 36 mm
Accessories: DCF77 antenna MTN668091



DCF77 antenna



Version	Art. no.	
light grey	**MTN668091**	**Discontinued**

Antenna for receiving the time by radio signal. The antenna should be connected to a year time switch REG-K/4/324 DCF-77.
Type of protection: IP 54
In KNX, to be completed with: KNX timer REG-K MTN677290
Contents: With mounting bracket.

Switch Actuators Overview

	SpaceLogic KNX Switch/Blind Master	SpaceLogic KNX Switch/Blind Extension	Blind/switch actuator REG-K/ x/x/10 with manual mode		Switch actuator REG-K/8x230/6	Switch actuator REG-K/x230/10 with manual mode			
									
Comercial reference	**MTN6705-0008**	**MTN6805-0008**	**MTN6499 ..**		**MTN646808**	**MTN6492 ..**			
			08	**12**		**02**	**04**	**08**	**12**
Number of switch contacts	8	8	16	24	8	2	4	8	12
Device width (1 md. = 1 module = 18 mm)	4 md.	4 md.	8 md.	12 md.	4 md.	2.5 md.	4 md.	4 md.	6 md.
Manual mode ■ Mechanical ■ Electrical ■ Reset by manual mode triggered actions	— ■ (lockable) —	on master device	— ■ (lockable) —		— — —	— ■ (lockable) —			
Connecting terminal (consumer load)	Screw terminals	Screw terminals	Plug-in screw terminals		Plug-in screw terminals	Plug-in screw terminals			
Nominal voltage, AC, 50-60 Hz	AC 250 V	AC 250 V	AC 100-240 V		AC 230 V	AC 230 V			
Nominal current	16 A AC-1, IEC 60947-4-1 10 A, IEC 60669-2-5	16 A AC-1, IEC 60947-4-1 10 A, IEC 60669-2-5	10 A, cosφ = 0,6		6 A, cosφ = 0.6	10 A, cosφ = 1 / 10 A, cosφ = 0.6			
Connection power max. at AC 230 V ■ Incandescent lamps ■ Halogen lamps ■ Capacitive load ■ Fluorescent lamps	2300 W 2300 W 10 AX, 140 µF	2300 W 2300 W 10 AX, 140 µF	2000 W 1700 W 105 µF 1800 W uncompensated, 1000 W parallel-compensated		1380 W 1380 W 105 µF 1000 VA	2000 W 1700 W 105 µF 1800 W uncompensated, 1000 W parallel-compensated			
DC power supply	not allowed	not allowed	not allowed		not allowed	not allowed			
Software									
ON/OFF delay	■	The software functions are provided by the master device	■		■	■			
Staircase lighting function with/without manual OFF ■ Retriggerable ■ Fix (for all push-buttons the same time) ■ Variable (for all push-buttons different times) ■ Retriggerable and adding ■ Retrigger to the higher time ■ Prewarn	■ ■ ■ ■ ■ ■ ■		■ ■ — — — — ■		■ ■ — — — — ■	■ ■ — — — — ■			
Flashing	■		—		■	—			
Make/Break contact adjustable	■		■		■	■			
Changeover contact adjustable	—		—		■	—			
Status/Status feedback ■ Active ■ Passive ■ Manual mode: Identify and acknowledge / Reset ■ Delayed per device / Delayed per channel	■ ■ ■ / ■ ■ / ■		■ ■ ■ / — — / ■		■ ■ — / — — / —	■ ■ ■ / — — / —			
Behaviour of bus voltage failure / bus voltage recovery	■ / ■		■ / ■		■ / ■	■ / ■			
Scenes ■ Sending delay	16 ■		5 —		8 —	5 —			
Higher priority functions	■ Logic function ■ Disable function or priority function		■ Disable function ■ Logic function or priority function		■ Disable function ■ Logic function or priority function	■ Disable function ■ Logic function or priority function			
Disable function ■ Behaviour of locking after bus voltage recovery	■		■		■	■			
Logic function ■ Logic operation ■ Value comparison / logic / gate function / filter / time delay	■ — / — / — / — / —		■ — / — / — / — / —		■ — / — / — / — / —	■ — / — / — / — / —			
Central function ■ Time delay / Save changes	■ ■ / ■		■ — / —		■ — / —	■ — / —			
Safety function	■		—		—	—			
Line monitoring (sending live signal)	■		—		—	—			
Energy saving function	■		—		—	—			

SpaceLogic KNX

Switch Actuators Overview

	Switch actuator Basic REG-K/x/16 A with manual mode				SpaceLogic KNX Switch actuator REG-K/x230/16 with manual mode				SpaceLogic KNX Switch actuator REG-K/x230/16 with manual mode and current detection			
												
Comercial reference	**MTN6700- ....**				**MTN647393**	**MTN647593**	**MTN647893**	**MTN648493**	**MTN647395**	**MTN647595**	**MTN647895**	**MTN648495**
	0002	**0004**	**0008**	**0012**								
Number of switch contacts	2	4	8	12	2	4	8	12	2	4	8	12
Device width (1 md. = 1 module = 18 mm)	2.5 md.	4 md.	8 md.	12 md.	2.5 md.	4 md.	8 md.	12 md.	2.5 md.	4 md.	8 md.	12 md.
Manual mode ■ Mechanical ■ Electrical ■ Reset by manual mode triggered actions	■ — —				■ — —				■ — ■			
Connecting terminal (consumer load)	Screw terminals				Screw terminals				Screw terminals			
Nominal voltage, AC, 50-60 Hz	AC 100-240 V				AC 100-240 V	AC 230 V	AC 100-240 V	AC 230 V	AC 100-240 V	AC 230 V	AC 100-240 V	AC 100-240 V
Nominal current	16 A, cosφ = 0.6				16 A, cosφ = 0.6				16 A, cosφ = 0.6			
Connection power max. at AC 230 V ■ Incandescent lamps ■ Halogen lamps ■ Capacitive load ■ Fluorescent lamps	3600 W 2500 W 105 µF 2000 VA				3600 W 2500 W 200 µF 2500 VA				3600 W 2500 W 200 µF 2500 VA			
DC power supply	not allowed				not allowed				Purely resistive loads allowed, DC 12-24 V, +10 %, 0,1 - 16 A			
Software												
ON/OFF delay	—				■				■			
Staircase lighting function with/without manual OFF ■ Retriggerable ■ Fix (for all push-buttons the same time) ■ Variable (for all push-buttons different times) ■ Retriggerable and adding ■ Retrigger to the higher time ■ Prewarn	■ ■ — — — — ■				■ ■ — — — — ■				■ ■ ■ ■ ■ ■ ■			
Flashing	—				■				■			
Make/Break contact adjustable	— (make contact)				■				■			
Changeover contact adjustable	—				■				—			
Status/Status feedback ■ Active ■ Passive ■ Manual mode: Identify and acknowledge / Reset ■ Delayed per device / Delayed per channel	■ — — / — — / —				■ ■ — / — — / —				■ ■ ■ / ■ ■ / ■			
Behaviour of bus voltage failure / bus voltage recovery	■ / ■				■ / ■				■ / ■			
Scenes ■ Sending delay	— —				8 —				8 ■			
Higher priority functions	■ Logic function				■ Disable function ■ Logic function or priority function				■ Logic function ■ Disable function or priority function			
Disable function ■ Behaviour of locking after bus voltage recovery	— —				■				■			
Logic function ■ Logic operation ■ Value comparison / logic / gate function / filter / time delay	■ — / — / — / — / —				■ — / — / — / — / —				■ ■ / ■ / ■ / ■ / ■			
Central function ■ Time delay / Save changes	■ — / —				■ — / —				■ ■ / ■			
Safety function	—				—				■			
Line monitoring (sending live signal)	—				—				■			
Energy saving function	—				—				—			

Switch Actuators Overview

Comercial reference	SpaceLogic KNX Switch/Blind Master	SpaceLogic KNX Switch/Blind Extension	Blind/switch actuator REG-K/ x/x/10 with manual mode		Switch actuator REG-K/8x230/6	Switch actuator REG-K/x230/10 with manual mode				
										
	MTN6705-0008	MTN6805-0008	MTN6499 ..		MTN646808	MTN6492 ..				
			08	12		02	04	08	12	
Current detection										
■ AC/DC	—	The software functions are provided by the master device	—		—	—				
■ Display energy consumption*	—		—		—	—				
■ Several limit monitorings	—		—		—	—				
■ Switch counter	—		—		—	—				
■ Hours counter	—		—		—	—				
■ Combined counter (Switch and hour counter with limit monitoring)	—		—		—	—				
Heating function										
■ Switching ON/OFF (2-point valve)	—		—		—	—				
■ Continuous (PWM)	—		—		—	—				
■ Cyclic surveillance of control value	—		—		—	—				
■ Locking in summer/winter mode	—		—		—	—				
■ Collected response „All valves closed“	—		—		—	—				
■ Current detection	—		—		—	—				
■ Valve protection cyclical / with telegram	— / —		— / —		— / —	— / —				
■ Valve protection feedback / status	— / —		— / —		— / —	— / —				
■ Behaviour when bus voltage fails / when bus voltage returns	— / —		— / —		— / —	— / —				

SpaceLogic KNX

Switch Actuators Overview

Comercial reference	Switch actuator Basic REG-K/x/16 A with manual mode				SpaceLogic KNX Switch actuator REG-K/x230/16 with manual mode				SpaceLogic KNX Switch actuator REG-K/x230/16 with manual mode and current detection			
												
	MTN6700-				MTN647393	MTN647593	MTN647893	MTN648493	MTN647395	MTN647595	MTN647895	MTN648495
	0002	0004	0008	0012								
Current detection												
■ AC/DC	—				—				■			
■ Display energy consumption*	—				—				■			
■ Several limit monitorings	—				—				■			
■ Switch counter	—				—				■			
■ Hours counter	—				—				■			
■ Combined counter (Switch and hour counter with limit monitoring)	—				—				■			
Heating function												
■ Switching ON/OFF (2-point valve)	—				—				■			
■ Continuous (PWM)	—				—				■			
■ Cyclic surveillance of control value	—				—				■			
■ Locking in summer/winter mode	—				—				■			
■ Collected response „All valves closed“	—				—				■			
■ Current detection	—				—				■			
■ Valve protection cyclical / with telegram	— / —				— / —				■ / ■			
■ Valve protection feedback / status	— / —				— / —				■ / ■			
■ Behaviour when bus voltage fails / when bus voltage returns	— / —				— / —				■ / ■			

Switch actuators



Switch actuator, flush-mounted/230/16

Version	Art. no.
polar white	**MTN629993**

For switching a load via a make contact. With integrated bus coupler and screw terminals. The device is connected to the bus with a bus connecting terminal. The actuator can be built into a 47 mm ceiling socket with hook or a flush-mounted switch box.
KNX software functions: Operation as break or make contact, delay functions for each channel, staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, blocking and additional logic operation or priority control, scenes, status feedback function per channel, central function, comprehensive parameterisation for bus voltage failure and recovery, parameterisable download behaviour.
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
Nominal current: 16 A, ohmic load cosφ = 1
10 A, inductive load cosφ = 0,6
Nominal load
Incandescent lamps: AC 100 V, max. 1173 W
AC 230 V, max. 2700 W
AC 240 V, max. 2817 W
Halogen lamps: AC 100 V, max. 739 W
AC 230 V, max. 1700 W
AC 240 V, max. 1773 W
Fluorescent lamps: AC 100 V, max. 434 VA
AC 230 V, max. 1000 VA
AC 240 V, max. 1043 VA
parallel-compensated
Capacitive load: AC 230 V, 10 A, max. 105 µF
Dimensions: 51x52x29 mm (WxHxD)
Contents: With bus connecting terminal.



SpaceLogic KNX Flush Mounted Switch Actuator 1g with 3 binary inputs

Version	Art. no.
	MTN6003-0011

1-gang switch actuator with three binary inputs for installation in a size 60 switch box. Floating contacts can be connected to the three inputs. Optionally, an NTC temperature sensor can be connected to the third input.
The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 10 m.
KNX Secure compatible
KNX software functions: Switch actuator functions:
Operation as break contact or make contact. Selection of default position on bus voltage failure/recovery. Switch on and/or off delay. Time switch function. Switching. Status feedback. Disable function or priority control. Scene function (64). Status feedback object can be inverted.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers. Temperature, Brightness, Color temperature,
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and lightscene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Lightscene ext. unit with memory function.
Logic module:
Logic operation, Converter, Blocking element, Comparator, Limit value
Nominal voltage: AC 230 V
Nominal current: 16 A, ohmic load
Switch contact: Make contact, floating relay contact
Nominal output
Incandescent lamps: AC 230 V, max. 2500 W
Halogen lamps: AC 230 V, max. 2500 W
HV LED lamps: AC 230 V, max. 400 W
Ohmic load: AC 230 V, 3000 W
Capacitive load: AC 230 V, 16 A, max. 140 µF
LV halogen lamps: max. 1200 VA, wound transformer
max. 1500 W, electronic transformers
Fluorescent lamps: AC 230 V, max. 1000 W, uncompensated
AC 230 V, max. 1160 W (140 µF) with parallel compensation
Inputs: 3
Temperature range: -5 °C to 45 °C
Dimensions: 48x50x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)

Switch Actuators



KNX switch actuator 16 A FM with 2 inputs



Version	Art. no.
	MTN6003-0001

1-gang switch actuator with two inputs for installation in a size 60 switch box or ceiling socket-outlet with hook. Floating contacts can be connected to the two inputs.
The first input is assigned to the actuator at the factory, enabling operation without programming.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Switch actuator functions:
Operation as break contact or make contact. Selection of default position on bus voltage failure/recovery. Switch on and/or off delay. Time switch function. Switching. Status feedback. Logic operation. Disable function or priority control. Status feedback object can be inverted.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and lightscene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Lightscene ext. unit with memory function.
Nominal voltage: AC 230 V
Nominal current: 16 A, ohmic load
Switch contact: Make contact, floating relay contact
Nominal output
Incandescent lamps: AC 230 V, max. 2500 W
Halogen lamps: AC 230 V, max. 2200 W
LV halogen lamps: max. 1000 VA, wound transformer
max. 1000 W, electronic transformers
Capacitive load: AC 230 V, 10 A, max. 105 µF
Inputs: 2
Temperature range: -5 °C to 45 °C
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)

Switch Actuators



2-gang switch actuator 6 A FM with 2 inputs



Version	Art. no.
	MTN6003-0002

2-gang switch actuator with two inputs for installation in a size 60 switch box. Floating contacts can be connected to the two inputs.
The inputs have already been assigned to the corresponding actuators at the factory, enabling operation without programming.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Switch actuator functions:
Operation as break contact or make contact. Selection of default position on bus voltage failure/recovery. Switch on and/or off delay. Time switch function. Switching. Status feedback. Logic operation. Disable function or priority control. Status feedback object can be inverted.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Nominal voltage: AC 230 V
Nominal current: 6 A, ohmic load
Switch contacts: 2x make contacts
Nominal output
Incandescent lamps: AC 230 V, max. 1200 W
Halogen lamps: AC 230 V, max. 1200 W
LV halogen lamps: max. 500 VA, wound transformer
max. 500 W, electronic transformers
Capacitive load: AC 230 V, 6 A, max. 14 µF
Inputs: 2
Temperature range: -5 °C to 45 °C
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)

Switch Actuators



Switch actuator REG-K/2x230/10 with manual mode



Version	Art. no.
light grey	**MTN649202**

For independent switching of up to 2 loads via make contacts. The function of the switching channels is freely configurable. All switching outlets can be operated manually using push-button operation.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact/make contact. Programmable behaviour for download. Delay functions for each channel. Staircase lighting function with/without manual OFF function. Cut-out warning for staircase lighting function. Scenes. Central function. Disable function. Logic operation or priority control. Status feedback function for each channel.
Power supply:
Nominal voltage: AC 230 V, 50-60 Hz
For each switch output:
Nominal current: 10 A, cosφ = 1; 10 A, cosφ = 0.6
Incandescent lamps: AC 230 V, max. 2000 W
Halogen lamps: AC 230 V, max. 1700 W
Fluorescent lamps: AC 230 V, max. 1800 W, uncompensated
AC 230 V, max. 1000 W with parallel compensation
Capacitive load: AC 230 V, max. 105 µF
Device width: 2.5 modules = approx. 45 mm
Contents: With bus connecting terminal and cable cover.



KNX Switch Actuator Basic REG-K/2x/16 A with manual mode

Version	Art. no.
	MTN6700-0002

For independent switching of 2 loads via make contacts. All switch outputs can be operated with manual switches. With integrated bus coupling unit.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, logic operation, status feedback per channel, central function, parameterisation for bus voltage failure and recovery.
Rated voltage (nominal voltage): AC 100-240 V, 50-60 Hz
Tolerance range: min. AC 90 V - max. AC 265 V
For each switching contact:
Nominal current: 16 A, inductive load cosφ = 0,6
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1080 W
AC 230 V, max. 2500 W
AC 240 V, max. 2500 W
Fluorescent lamps: AC 100 V, max. 900 VA
AC 230 V, max. 2000 VA
AC 240 V, max. 2000 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 105 µF
Device width: 2.5 modules = approx. 45 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



SpaceLogic KNX Switch actuator REG-K/2x230/16 with manual mode



Version	Art. no.
light grey	**MTN647393**

For independent switching of two loads via make contacts. With integrated bus coupler and screw terminals. The 230 V switch output can be operated with a manual switch.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break or make contact, delay functions for each channel, staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, blocking and additional logic operation or priority control, scenes, status feedback function per channel, central function, comprehensive parameterisation for bus voltage failure and recovery, parameterisable download behaviour.
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each switching contact:
Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1086 W
AC 230 V, max. 2500 W
AC 240 V, max. 2608 W
Fluorescent lamps: AC 100 V, max. 1086 VA
AC 230 V, max. 2500 VA
AC 240 V, max. 2608 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 200 µF
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Device width: 2.5 modules = approx. 45 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Switch actuator REG-K/2x230/16 with manual mode and current detection

Version	Art. no.
light grey	**MTN647395**

For independent switching of two loads via make contacts. The actuator has integrated current detection that measures the load current on each channel. All 230 V switch outputs can be operated with manual switches. With integrated bus coupling unit.
A green LED indicates that the device is ready for operation once the application has been loaded. The load is connected with screw terminals.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact or make contact. Staircase lighting function with/without manual OFF function and switch-off warning. Delay functions. Scenes. Logic function. Blocking or priority control. Feedback function. Status. Central function with delay. Parameterisation for bus voltage failure and recovery. Behaviour for download.
Current detection function: Behaviour when value exceeds/falls short of the threshold value. Energy, operating and switch on counter with limit value monitoring.
Flash function.
Nominal voltage: AC 100-240 V ±10%
DC 12-24 V, 0.1-16 A
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each switching contact:
Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: >10^6
AC1/AC3/AC5 operation: >3x10^4
230V, 1A resistive: >8x10^5
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1086 W
AC 230 V, max. 2500 W
AC 240 V, max. 2608 W
Fluorescent lamps: AC 100 V, max. 1086 VA
AC 230 V, max. 2500 VA
AC 240 V, max. 2608 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 200 µF
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Current detection (load current):
Detection range: 0.1 A to 16 A (sine effective value or DC)
Sensing accuracy: +/- 8% of the current value at hand (sine) and +/- 100 mA
Frequency: 50/60 Hz, for alternating current (AC)
Description: 100 mA
Device width: 2.5 modules = approx. 45 mm
Contents: With bus connecting terminal and cable cover.



Switch actuator REG-K/4x230/10 with manual mode

Version	Art. no.
light grey	**MTN649204**

For independent switching of up to 4 loads via make contacts. The function of the switching channels is freely configurable. All switching outlets can be operated manually using push-button operation.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact/make contact. Programmable behaviour for download. Delay functions for each channel. Staircase lighting function with/without manual OFF function. Cut-out warning for staircase lighting function. Scenes. Central function. Disable function. Logic operation or priority control. Status feedback function for each channel.
Power supply:
Nominal voltage: AC 230 V, 50-60 Hz
For each switch output:
Nominal current: 10 A, cosφ = 1; 10 A, cosφ = 0.6
Incandescent lamps: AC 230 V, max. 2000 W
Halogen lamps: AC 230 V, max. 1700 W
Fluorescent lamps: AC 230 V, max. 1800 W, uncompensated
AC 230 V, max. 1000 W with parallel compensation
Capacitive load: AC 230 V, max. 105 µF
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.



KNX Switch Actuator Basic REG-K/4x/16 A with manual mode



Version	Art. no.
	MTN6700-0004

For independent switching of 4 loads via make contacts. All switch outputs can be operated with manual switches. With integrated bus coupling unit.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, logic operation, status feedback per channel, central function, parameterisation for bus voltage failure and recovery.
Rated voltage (nominal voltage): AC 100-240 V, 50-60 Hz
Tolerance range: min. AC 90 V - max. AC 265 V
For each switching contact:
Nominal current: 16 A, inductive load cosφ = 0,6
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1080 W
AC 230 V, max. 2500 W
AC 240 V, max. 2500 W
Fluorescent lamps: AC 100 V, max. 900 VA
AC 230 V, max. 2000 VA
AC 240 V, max. 2000 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 105 µF
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



SpaceLogic KNX Switch actuator REG-K/4x230/16 with manual mode



Version	Art. no.
light grey	**MTN647593**

For independent switching of four loads via make contacts. With integrated bus coupler 2 and screw terminals. The 230 V switch output can be operated with a manual switch.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break or make contact, delay functions for each channel, staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, blocking and additional logic operation or priority control, scenes, status feedback function per channel, central function, comprehensive parameterisation for bus voltage failure and recovery, parameterisable download behaviour.
Nominal voltage: 230 V AC, 50-60 Hz
For each switching contact:Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$**Incandescent lamps:** 230 V AC, max. 3600 W
Halogen lamps: 230 V AC, max. 2500 W
Fluorescent lamps: AC 230 V, max. 2500 VA
Capacitive load: 230 V AC, 16 A, max. 200 µF
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



SpaceLogic KNX Switch actuator REG-K/4x230/16 with manual mode and current detection



Version	Art. no.
light grey	**MTN647595**

For independent switching of four loads via make contacts. The actuator has integrated current detection that measures the load current on each channel. All 230 V switch outputs can be operated with manual switches. With integrated bus coupling unit.
A green LED indicates that the device is ready for operation once the application has been loaded. The load is connected with screw terminals.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact or make contact. Staircase lighting function with/without manual OFF function and switch-off warning. Delay functions. Scenes. Logic function. Blocking or priority control. Feedback function. Status. Central function with delay. Parameterisation for bus voltage failure and recovery. Behaviour for download.
Current detection function: Behaviour when value exceeds/falls short of the threshold value.
Energy, operating and switch on counter with limit value monitoring.
Flash function.
Nominal voltage: 230 V AC, 50-60 Hz
DC 12-24 V ±10%, 0.1-16 A
For each switching contact:Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$**Incandescent lamps:** 230 V AC, max. 3600 W
Halogen lamps: 230 V AC, max. 2500 W
Fluorescent lamps: 230 V AC, max. 2500 VA, with parallel compensation
Capacitive load: 230 V AC, 16 A, max. 200 µF
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Current detection load current:Detection range: 0.1 A to 16 A (sine effective value or direct current)
Detection accuracy: +/- 8% of the present current value (sine) and +/- 100 mA
Frequency: 50/60 Hz with alternating voltage
Display: 100 mA
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



Switch actuator REG-K/8x230/6

Version	Art. no.
light grey	**MTN646808**

For independent switching of eight loads via make contacts. With integrated bus coupler and plug-in screw terminals.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break or make contact, delay functions for each channel, staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, blocking and additional logic operation or priority control, scenes, status feedback function per channel, central function, comprehensive parameterisation for bus voltage failure and recovery, parameterisable download behaviour.
Nominal voltage: AC 230 V, 50-60 Hz
For each switching contact:
Nominal current: 6 A, cosφ = 0.6
Incandescent lamps: AC 230 V, max. 1380 W
Halogen lamps: AC 230 V, max. 1380 W
Fluorescent lamps: AC 230 V, max. 1000 VA
Capacitive load: AC 230 V, 6 A, max. 105 µF
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.



Switch actuator REG-K/8x230/10 with manual mode

Version	Art. no.
light grey	**MTN649208**

For independent switching of up to 8 loads via make contacts. The function of the switching channels is freely configurable. All switching outlets can be operated manually using push-button operation.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact/make contact. Programmable behaviour for download. Delay functions for each channel. Staircase lighting function with/without manual OFF function. Cut-out warning for staircase lighting function. Scenes. Central function. Disable function. Logic operation or priority control. Status feedback function for each channel.
Power supply:
Nominal voltage: AC 230 V, 50-60 Hz
For each switch output:
Nominal current: 10 A, cosφ = 1; 10 A, cosφ = 0.6
Incandescent lamps: AC 230 V, max. 2000 W
Halogen lamps: AC 230 V, max. 1700 W
Fluorescent lamps: AC 230 V, max. 1800 W, uncompensated
AC 230 V, max. 1000 W with parallel compensation
Capacitive load: AC 230 V, max. 105 µF
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



SpaceLogic KNX Switch/Blind Master

Version	Art. no.
light grey	**MTN6705-0008**

For independent control of up to 4 blind/roller shutter drives or for switching up to 8 loads via make contacts. The function of the blind or switching channels is freely configurable. All blind/switch outputs can be operated manually using push-buttons.

The number of channels can be increased by connecting SpaceLogic KNX Switch/Blind Extensions. A maximum of 2 Extensions can be connected to the Master, so up to 24 loads can be switched or 12 blind drives can be controlled. The Master controls the Extensions, their power supply and communication with the bus.

Operating elements: Push-buttons for switching to manual operation, for choosing the device to be operated (Master and Extensions) and for channel control.

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.

General KNX software functions: Energy saving, device safety, device health, manual operation, PIN code for firmware update.

Blind actuator functions: Running time, idle time, step interval, locking function, movement range limits, weather alarm, 8-bit positioning for height and slats, scenes, status and feedback function.

Switch actuator functions: Operation as break contact/make contact, programmable behaviour for download, delay functions for each channel, staircase lighting function with/without manual OFF function, switch-off prewarning for staircase lighting function, scenes, central function, locking function, logic operation or priority control, status feedback function for each channel.

Supply voltage: KNX bus, approx. 6.5 mA (Master), approx. 9 mA (Master + 1 Extension), approx. 12.5 mA (Master + 2 Extensions)

Nominal voltage: AC 250 V, 50-60 Hz
Nominal current: 16 A AC-1, IEC 60947-4-1 / 10 A, IEC 60669-2-5
For each blind output:
Motor load: 1000 VA
For each switch output:
Nominal load
Incandescent lamps: 2300 W
Halogen lamps: 2300 W
LED: 200 W
Capacitive load: 10 AX, max. 140 µF
Inductive load: 10 A, cosφ = 0.6
Relay data - inrush current: max. 800 A/200 µs, max. 165 A/20 ms

Device width: 4 modules = approx. 72 mm
Accessories: SpaceLogic KNX Switch/Blind Extension MTN6805-0008
Contents: With bus connecting terminal.



SpaceLogic KNX Switch/Blind Extension



Version	Art. no.
light grey	**MTN6805-0008**

The SpaceLogic KNX Switch/Blind Extension is a switch actuator that extends the channels of a SpaceLogic KNX Switch/Blind Master or a SpaceLogic KNX Universal Dimming Master.

For independent control of up to 4 blind/roller shutter drives or for switching up to 8 loads via make contacts. The function of the blind or switching channels is freely configurable.

The ETS programming is carried out in the ETS application of the Master. The Master controls the function of the Extension, the power supply and communication to the KNX bus.

All outputs can be operated manually using the Master's keypad.

On the Extension a green LED indicates readiness for operation, a red manual operation LED shows whether the Extension is controlled manually.

For installation on DIN rails TH35 according to EN 60715. The connection to the Master or another Extension is made either with a Module Link or with a Cable Link.

KNX software functions: The functions are set in the KNX application of the Master

Supply voltage: via link interface
Nominal voltage: AC 250 V, 50-60 Hz
Nominal current: 16 A AC-1, IEC 60947-4-1 / 10 A, IEC 60669-2-5

For each blind output:
Motor load: 1000 VA

For each switch output:
Nominal load
Incandescent lamps: 2300 W
Halogen lamps: 2300 W
LED: 200 W
Capacitive load: 10 AX, max. 140 µF
Inductive load: 10 A, cosφ = 0.6
Relay data - inrush current: max. 800 A/200 µs, max. 165 A/20 ms

Device width: 4 modules = approx. 72 mm
In KNX, to be completed with: SpaceLogic KNX Switch/Blind Master MTN6705-0008, SpaceLogic KNX Universal Dimming Master MTN6710-0102
Accessories: SpaceLogic KNX Cable Link S MTN6941-0001, SpaceLogic KNX Cable Link L MTN6941-0002
Contents: With Module Link.





SpaceLogic KNX Cable Link S



Version	Art. no.
30 cm	**MTN6941-0001**

The Cable Link connects Master/Extension or Extension/Extension that are not placed directly next to each other on the DIN rail.
Length: 30 cm

SpaceLogic KNX Cable Link L



Version	Art. no.
150 cm	**MTN6941-0002**

The Cable Link connects Master/Extension or Extension/Extension that are not placed directly next to each other on the DIN rail.
Length: 150 cm



SpaceLogic KNX Module Link



Version	Art. no.
	MTN6940-0000

The Module Link connects Master/Extension or Extension/Extension that are placed directly next to each other on the DIN rail.



KNX Switch Actuator Basic REG-K/8x/16 A with manual mode



Version	Art. no.
	MTN6700-0008

For independent switching of 8 loads via make contacts. All switch outputs can be operated with manual switches. With integrated bus coupler.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, logic operation, status feedback per channel, central function, parameterisation for bus voltage failure and recovery.
Rated voltage (nominal voltage): AC 100-240 V, 50-60 Hz
Tolerance range: min. AC 90 V - max. AC 265 V
For each switching contact:
Nominal current: 16 A, inductive load cosφ = 0,6
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1080 W
AC 230 V, max. 2500 W
AC 240 V, max. 2500 W
Fluorescent lamps: AC 100 V, max. 900 VA
AC 230 V, max. 2000 VA
AC 240 V, max. 2000 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 105 µF
Device width: 8 modules = approx. 144 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Switch actuator REG-K/8x230/16 with manual mode



Version	Art. no.
light grey	**MTN647893**

For independent switching of 8 loads via make contacts. All 230 V switch outputs can be operated with manual switches. With integrated bus coupler.
The device is connected to the mains via screw terminals; every second L connection is bridged internally. A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break or make contact, delay functions for each channel, staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, blocking and additional logic operation or priority control, scenes, status feedback function per channel, central function, comprehensive parameterisation for bus voltage failure and recovery, parameterisable download behaviour.
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each switching contact:
Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1086 W
AC 230 V, max. 2500 W
AC 240 V, max. 2608 W
Fluorescent lamps: AC 100 V, max. 1086 VA
AC 230 V, max. 2500 VA
AC 240 V, max. 2608 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 200 µF
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Device width: 8 modules = approx. 144 mm
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Switch Actuators



SpaceLogic KNX Switch actuator REG-K/8x230/16 with manual mode and current detection



Version	Art. no.
light grey	**MTN647895**

For independently switching 8 loads via make contacts. The actuator has integrated current detection that measures the load current on each channel. All 230 V switch outputs can be operated with manual switches. With integrated bus coupling unit.
A green LED indicates that the device is ready for operation once the application has been loaded. The load is connected with screw terminals.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact or make contact. Staircase lighting function with/without manual OFF function and switch-off warning. Delay functions. Scenes. Logic function. Blocking or priority control. Feedback function. Status. Central function with delay. Parameterisation for bus voltage failure and recovery. Behaviour for download.
Current detection function: Behaviour when value exceeds/falls short of the threshold value.
Energy, operating and switch on counter with limit value monitoring.
Flash function.
Nominal voltage: AC 100-240 V ±10%
DC 12-24 V, 0.1-16 A
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each switching contact:
Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1086 W
AC 230 V, max. 2500 W
AC 240 V, max. 2608 W
Fluorescent lamps: AC 100 V, max. 1086 VA
AC 230 V, max. 2500 VA
AC 240 V, max. 2608 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 200 µF
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Current detection (load current):
Detection range: 0.1 A to 16 A (sine effective value or DC)
Sensing accuracy: +/- 8% of the current value at hand (sine) and +/- 100 mA
Frequency: 50/60 Hz, for alternating current (AC)
Description: 100 mA
Device width: 8 modules = approx. 144 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



Switch actuator REG-K/12x230/10 with manual mode



Version	Art. no.
light grey	**MTN649212**

For independent switching of up to 12 loads via make contacts. The function of the switching channels is freely configurable. All switching outlets can be operated manually using push-button operation.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact/make contact. Programmable behaviour for download. Delay functions for each channel. Staircase lighting function with/without manual OFF function. Cut-out warning for staircase lighting function. Scenes. Central function. Disable function. Logic operation or priority control. Status feedback function for each channel.
Power supply:
Nominal voltage: AC 230 V, 50 - 60 Hz
External auxiliary voltage (optional): AC 110 - 240 V, 50 - 60 Hz, max. 2 VA
For each switch output:
Nominal current: 10 A, cosφ = 1; 10 A, cosφ = 0.6
Incandescent lamps: AC 230 V, max. 2000 W
Halogen lamps: AC 230 V, max. 1700 W
Fluorescent lamps: AC 230 V, max. 1800 W, uncompensated
AC 230 V, max. 1000 W parallel-compensated
Capacitive load: AC 230 V, max. 105 µF
Device width: 6 modules = approx. 108 mm
Contents: With bus connecting terminal and cable cover.



KNX Switch Actuator Basic REG-K/12x/16 A with manual mode



Version	Art. no.
	MTN6700-0012

For independent switching of 12 loads via make contacts. All switch outputs can be operated with manual switches. With integrated bus coupler.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, logic operation, status feedback per channel, central function, parameterisation for bus voltage failure and recovery.
Rated voltage (nominal voltage): AC 100-240 V, 50-60 Hz
Tolerance range: min. AC 90 V - max. AC 265 V
For each switching contact:
Nominal current: 16 A, inductive load cosφ = 0,6
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1080 W
AC 230 V, max. 2500 W
AC 240 V, max. 2500 W
Fluorescent lamps: AC 100 V, max. 900 VA
AC 230 V, max. 2000 VA
AC 240 V, max. 2000 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 105 µF
Device width: 12 modules = approx. 216 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



SpaceLogic KNX Switch actuator REG-K/12x230/16 with manual mode



Version	Art. no.
light grey	**MTN648493**

For independent switching of 12 loads via make contacts. All 230 V switch outputs can be operated with manual switches. With integrated bus coupler.
The device is connected to the mains via screw terminals; every second L connection is bridged internally. A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break or make contact, delay functions for each channel, staircase lighting function with/without manual OFF function, cut-out warning for staircase lighting function, blocking and additional logic operation or priority control, scenes, status feedback function per channel, central function, comprehensive parameterisation for bus voltage failure and recovery, parameterisable download behaviour.
Nominal voltage: 230 V AC, 50-60 Hz
For each switching contact:Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$**Incandescent lamps:** 230 V AC, max. 3600 W
Halogen lamps: 230 V AC, max. 2500 W
Fluorescent lamps: AC 230 V, max. 2500 VA
Capacitive load: 230 V AC, 16 A, max. 200 µF
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Device width: 12 modules = approx. 216 mm
Contents: With bus connecting terminal and cable cover.

Switch Actuators



SpaceLogic KNX Switch actuator REG-K/12x230/16 with manual mode and current detection



Version	Art. no.
light grey	**MTN648495**

For independently switching 12 loads via make contacts. The actuator has integrated current detection that measures the load current on each channel. All 230 V switch outputs can be operated with manual switches. With integrated bus coupling unit.
A green LED indicates that the device is ready for operation once the application has been loaded. The load is connected with screw terminals.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Operation as break contact or make contact. Staircase lighting function with/without manual OFF function and switch-off warning. Delay functions. Scenes. Logic function. Blocking or priority control. Feedback function. Status. Central function with delay. Parameterisation for bus voltage failure and recovery. Behaviour for download.
Current detection function: Behaviour when value exceeds/falls short of the threshold value.
Energy, operating and switch on counter with limit value monitoring.
Flash function.
Nominal voltage: AC 100-240 V ±10%
DC 12-24 V, 0.1-16 A
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each switching contact:
Switching current: 16 A, cosφ= 0.6
AC1 operation: max. 16 A
AC3 operation: max. 10 A
AC5 operation: max. 16 A
DC current switching capacity: max. 16 A/ 24 V DC
Output life endurance:
Mechanical: $>10^6$
AC1/AC3/AC5 operation: $>3x10^4$
230V, 1A resistive: $>8x10^5$
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1086 W
AC 230 V, max. 2500 W
AC 240 V, max. 2608 W
Fluorescent lamps: AC 100 V, max. 1086 VA
AC 230 V, max. 2500 VA
AC 240 V, max. 2608 VA
parallel-compensated
Capacitive load: AC 230 V, 16 A, max. 200 µF
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
Minimum switching performance: 100 mA/12 V AC/DC
Maximum peak inrush-current:
150µs: 600 A
250µs: 480 A
600µs: 300 A
Current detection (load current):
Detection range: 0.1 A to 16 A (sine effective value or DC)
Sensing accuracy: +/- 8% of the current value at hand (sine) and +/- 100 mA
Frequency: 50/60 Hz, for alternating current (AC)
Description: 100 mA
Device width: 12 modules = approx. 216 mm
Contents: With bus connecting terminal and cable cover.

Blind Actuators Overview

	SpaceLogic KNX Switch/ Blind Master	SpaceLogic KNX Switch/ Blind Extension	Blind/switch actuator REG-K/x/x/10 with manual mode			Blind actuator REG-K/4x/6	SpaceLogic KNX Blind actuator REG-K/4x24/6 with manual mode	Roller shutter actuator REG-K/4x/10 with manual mode	SpaceLogic KNX Blind actuator REG-K/x/10 with manual mode		SpaceLogic KNX Blind actuator REG-K/8x/10 with manual mode
											
Article number	**MTN6705-0008**	**MTN6805-0008**	**MTN649908**	**MTN649912**		**MTN646704**	**MTN648704**	**MTN649704**	**MTN649802**	**MTN649804**	**MTN649808**
Number of channels	8	8	8	12		4	4	4	2	4	8
Device width	4 modules	4 modules	8 modules	12 modules		4 modules	4 modules	4 modules	4 modules		8 modules
Manual mode push-buttons	■	■	■			—	■	■	■		■
Connecting terminal (consumer load)	Screw terminals	Screw terminals	Plug-in screw terminals			Plug-in screw terminals	Plug-in screw terminals	Plug-in screw terminals	Plug-in screw terminals		Plug-in screw terminals
Nominal voltage, AC, 50-60 Hz	AC 250 V	AC 250 V	AC 100-240 V			AC 230 V	—	AC 100-240 V	AC 100-240 V		AC 230 V
Nominal voltage, DC	—	—	—			—	DC 24 V, ±10 %	—	—		—
Nominal current	16 A AC-1, IEC 60947-4-1 10 A, IEC 60669-2-5	16 A AC-1, IEC 60947-4-1 10 A, IEC 60669-2-5	10 A, cosφ = 0,6			6 A, cosφ = 0,6	6 A	10 A, cosφ = 0,6	10 A, cosφ = 0,6		10 A, cosφ = 0,6
Auxiliary power (optional)	—	—	AC 110-240 V, 50-60 Hz, max. 2 VA			—	—	—	—		AC 110-240 V, 50-60 Hz, max. 2 VA
Software											
Configuration switching or blind	■	The software functions are provided by the master device	■			—	—	—	—		—
Defining blind type	■		■			■	■	—	■		■
Slat functionality	■		■			■	■	—	■		■
Calibration (reference movement)	■		■			■	■	■	■		■
Movement range limit	■		—			■	■	■	■		■
Pause on reverse on change in direction	■		■			■	■	■	■		■
Extended drive parameters	■		■			■	■	■	■		■
Control by ■ manual mode via the push-buttons of the actuator ■ automatic objects or preset objects ■ manual operation via objects	 ■ ■ ■		 ■ — ■			 — ■ ■	 ■ ■ ■	 ■ ■ ■	 ■ ■ ■		 ■ ■ ■
Manual mode enable/disable when bus voltage fails	—		■ (Precondition: auxiliary power)			—	—	—	—		■ (Precondition: auxiliary power)
Locking manual operation via objects	■		—			■	■	■	■		■
Weather alarm functions ■ Wind alarm ■ Rain alarm ■ Frost alarm ■ Set the order of priority ■ Behaviour at start/end of the wether alarm	 3 1 1 ■ ■		 1 1 — ■ ■			 3 1 1 ■ ■	 3 1 1 ■ ■	 3 1 1 ■ ■	 3 1 1 ■ ■		 3 1 1 ■ ■
Alarm functions ■ Behavior at the start/end of the alarm	■		—			■	■	■	■		■
Set the order of priority for higher-level functions (alarm, weather alarm, locking, movement range)	■		—			■	■	■	■		■
Scenes	16		5			4	5	5	5		5
Disable function ■ Behavior at the start/end of the locking	■		—			■	■	■	■		■
Behaviour of bus voltage failure / bus voltage recovery / download	■ / ■ / ■		■ / ■ / ■			■ / ■ / ■	■ / ■ / ■	■ / ■ / ■	■ / ■ / ■		■ / ■ / ■
Status messages ■ Hight ■ Slat ■ Automatic ■ Drive locking or movement range limit	 ■ ■ ■ ■		 ■ ■ — —			 ■ ■ ■ ■	 ■ ■ ■ ■	 ■ — ■ ■	 ■ ■ ■ ■		 ■ ■ ■ ■
Line monitoring (sending live signal)	■		—			—	—	—	—		—
Energy saving function	■		—			—	—	—	—		—

SpaceLogic KNX

Blind Actuators Overview

Blind actuators



SpaceLogic KNX Blind actuator REG-K/2x/10 with manual mode




Version	Art. no.
light grey	**MTN649802**

For independent control of 2 blind/roller shutter drives. The function of the blind channels is freely configurable. All blind outputs can be operated manually using push-button operation. Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Differentiated disable functions and weather alarms. 8-bit positioning for height and slat. Scenes. Manual/automatic mode. Differentiated status and status feedback functions.
For each blind output:
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
Nominal current: 10 A, inductive load cosφ = 0.6
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Blind actuator REG-K/4x24/6 with manual mode



Version	Art. no.
light grey	**MTN648704**

For independent control of 4 blind/roller shutter drives. The function of the blind channels is freely configurable. All blind outputs can be operated manually using push-button operation. Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Differentiated disable functions and weather alarms. 8-bit positioning for height and slat. Scenes. Manual/automatic mode. Differentiated status and status feedback functions.
For each blind output:
Nominal voltage: DC 24 V ±10 %
Nominal current: 6 A
Load types: 24 V direct current drives
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.



Blind actuator REG-K/4x/6



Version	Art. no.
light grey	**MTN646704**

For independent control of 4 blind/roller shutter drives. With integrated bus coupler and plug-in screw terminals.
A green LED indicates readiness for operation after the application has been loaded.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Weather alarms. 8-bit positioning for height and slats. Scenes. Automatic function. Differentiated status and feedback functions.
For each blind output:
Nominal voltage: AC 230 V, 50-60 Hz
Nominal current: 6 A, cosφ = 0.6
Motor load: AC 230 V, max. 1000 W
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.



Roller shutter actuator REG-K/4x/10 with manual mode



Version	Art. no.
light grey	**MTN649704**

For independent control of 4 roller shutter drives. The function of the roller shutter channels is freely configurable. All roller shutter outputs can be operated manually using push-button operation.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Roller shutter functions: Running time. Idle time. Differentiated disable functions and weather alarms. 8-bit positioning for height. Scenes. Manual/automatic function. Differentiated status and status feedback functions.
For each roller shutter output:
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
Nominal current: 10 A, inductive load cosφ = 0.6
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.

Blind Actuators



SpaceLogic KNX Blind actuator REG-K/4x/10 with manual mode




Version	Art. no.
light grey	**MTN649804**

For independent control of 4 blind/roller shutter drives. The functions of the blind channels is freely configurable. All blind outputs can be operated manually using push-button operation. Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Differentiated disable functions and weather alarms. 8-bit positioning for height and slat. Scenes. Manual/automatic mode. Differentiated status and status feedback functions.
For each blind output:
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
Nominal current: 10 A, inductive load cosφ = 0.6
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Blind actuator REG-K/8x/10 with manual mode



Version	Art. no.
light grey	**MTN649808**

For independent control of 8 blind/roller shutter drives. The functions of the blind channels is freely configurable. All blind outputs can be operated manually using push-buttons.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Differentiated disable functions and weather alarms. 8-bit positioning for height and slat. Scenes. Manual/automatic mode. Differentiated status and status feedback functions.
For each blind output:
Nominal voltage: AC 230 V, 50 - 60 Hz
Nominal current:10 A, cosφ = 0.6
Motor load: AC 230 V, max. 1000 W
External auxiliary voltage (optional): AC 110-240 V, 50-60 Hz, max. 2 VA
Device width: 8 modules = approx. 144 mm
Contents: With bus connecting terminal and cable cover.

Blind Actuators



SpaceLogic KNX Flush Mounted Blind/Switch actuator 2g with 3 binary inputs



Version	Art. no.
	MTN6003-0012

1-gang blind actuotr or 2-gang switch actuator with three binary inputs for installation in a size 60 switch box. Floating contacts can be connected to the three inputs. Optionally, an NTC temperature sensor can be connected to the third input.
The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 10 m.
KNX Secure compatible
KNX software functions: Blind actuator function:
Operation mode: Blinds, roller shutters, awnings or ventilation flaps. Raising or lowering times with extension for the upper limit position. Status feedback of the position or of the slat position. Active/passive status feedback, cycl. status feedback function. Up to 5 safety functions (3 wind alarms, 1 rain alarm, 1 frost alarm). Cycl. monitoring. Sun protection function with fixed and variable positions. Shading controls with heating/cooling automatic mode and presence function. Behaviour when bus voltage fails/recovers. Status feedback delay after bus voltage recovery. Priority function. Scene function (64). Memory function for scenes.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers. Temperature, Brightness, Color temperature,
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time. Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator. Scene ext. unit with memory function.
Logic module:
Logic operation, Converter, Blocking element, Comparator, Limit value

Nominal voltage: AC 230 V
Nominal current: ∑ 16 A, ohmic load
Switch contact: Make contact, floating relay contact
Nominal output
Motor: AC 230 V, max. 1380 W
Incandescent lamps: AC 230 V, max. 2500 W
Halogen lamps: AC 230 V, max. 2500 W
HV LED lamps: AC 230 V, max. 400 W
Ohmic load: AC 230 V, 3000 W
Capacitive load: AC 230 V, 16 A, max. 140 µF
LV halogen lamps: max. 1200 VA, wound transformer
max. 1500 W, electronic transformers
Fluorescent lamps: AC 230 V, max. 1000 W, uncompensated
AC 230 V, max. 1160 W (140 µF) with parallel compensation
Inputs: 3
Temperature range: -5 °C to 45 °C
Dimensions: 48x50x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)



KNX blind actuator FM with 3 inputs



Version	Art. no.
	MTN6003-0004


1-gang blind actuator with three inputs for installation in a size 60 switch box. Floating contacts can be connected to the three inputs.
The inputs have already been assigned to the actuator at the factory, enabling operation without programming.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Blind actuator function:
Operation mode: Blinds, roller shutters, awnings or ventilation flaps. Raising or lowering times with extension for the upper limit position. Status feedback of the position or of the slat position. Active/passive status feedback, cycl. status feedback function. Up to 5 safety functions (3 wind alarms, 1 rain alarm, 1 frost alarm). Cycl. monitoring. Sun protection function with fixed and variable positions. Shading controls with heating/cooling automatic mode and presence function. Behaviour when bus voltage fails/recovers. Status feedback delay after bus voltage recovery. Priority function. 8 Scene function. Memory function for scenes.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Nominal voltage: AC 230 V, 50/60 Hz
Switching current: 3 A, AC1
Nominal output
Motor: AC 230 V, 600 VA
Inputs: 3
Temperature range: -5 °C to 45 °C
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)

SpaceLogic KNX

Blind Actuators



KNX blind and heating actuator with 3 inputs



Version	Art. no.
	MTN6003-0006

1-gang blind actuator and 1-gang heating actuator with three inputs for installation in a size 60 switch box. Floating contacts can be connected to the inputs.
The inputs have already been assigned to the actuator at the factory, enabling operation without programming.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Blind actuator function:
Operation mode: Blinds, roller shutters, awnings or ventilation flaps. Raising or lowering times with extension for the upper limit position. Status feedback of the position or of the slat position. Active/passive status feedback, cycl. status feedback function. Up to 5 safety functions (3 wind alarms, 1 rain alarm, 1 frost alarm). Cycl. monitoring. Sun protection function with fixed and variable positions. Shading controls with heating/cooling automatic mode and presence function. Behaviour when bus voltage fails/recovers. Status feedback delay after bus voltage recovery. Priority function. 8 Scene function. Memory function for scenes.
Heating actuator function:
Can be controlled by a control value (1 bit or 1 byte). Status indication (1 bit or 1 byte).
Valve control (de-energised open/closed). Summer or winter mode can be selected. Cyclical monitoring of control value. Emergency mode and alarm signal. Priority control (forced setting for summer and winter mode with different values). Behaviour when bus voltage recovers and fails. Overload or short circuit signal. Control of the valve drives (switching or via PWM). Function to protect valves from sticking.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Nominal voltage: AC 230 V, 50/60 Hz
Blind output
Switching current: 3 A, AC1
Nominal output
Motor: AC 230 V, 600 VA
Heating output
Switch contact: Triac
Nominal current: 5 to 25 mA, max. 2 valve drives
Inputs: 3
Temperature range: -5 °C to 45 °C
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)

Blind/switch actuators



SpaceLogic KNX Switch/Blind Master



Version	Art. no.
light grey	**MTN6705-0008**

For independent control of up to 4 blind/roller shutter drives or for switching up to 8 loads via make contacts. The function of the blind or switching channels is freely configurable. All blind/switch outputs can be operated manually using push-buttons.

The number of channels can be increased by connecting SpaceLogic KNX Switch/Blind Extensions. A maximum of 2 Extensions can be connected to the Master, so up to 24 loads can be switched or 12 blind drives can be controlled. The Master controls the Extensions, their power supply and communication with the bus.

Operating elements: Push-buttons for switching to manual operation, for choosing the device to be operated (Master and Extensions) and for channel control.

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.

General KNX software functions: Energy saving, device safety, device health, manual operation, PIN code for firmware update.

Blind actuator functions: Running time, idle time, step interval, locking function, movement range limits, weather alarm, 8-bit positioning for height and slats, scenes, status and feedback function.

Switch actuator functions: Operation as break contact/make contact, programmable behaviour for download, delay functions for each channel, staircase lighting function with/without manual OFF function, switch-off prewarning for staircase lighting function, scenes, central function, locking function, logic operation or priority control, status feedback function for each channel.

Supply voltage: KNX bus, approx. 6.5 mA (Master), approx. 9 mA (Master + 1 Extension), approx. 12.5 mA (Master + 2 Extensions)

Nominal voltage: AC 250 V, 50-60 Hz
Nominal current: 16 A AC-1, IEC 60947-4-1 / 10 A, IEC 60669-2-5

For each blind output:
Motor load: 1000 VA

For each switch output:
Nominal load
Incandescent lamps: 2300 W
Halogen lamps: 2300 W
LED: 200 W
Capacitive load: 10 AX, max. 140 µF
Inductive load: 10 A, cosφ = 0.6
Relay data - inrush current: max. 800 A/200 µs, max. 165 A/20 ms

Device width: 4 modules = approx. 72 mm
Accessories: SpaceLogic KNX Switch/Blind Extension MTN6805-0008
Contents: With bus connecting terminal.



SpaceLogic KNX Switch/Blind Extension



Version	Art. no.
light grey	**MTN6805-0008**

The SpaceLogic KNX Switch/Blind Extension is a switch actuator that extends the channels of a SpaceLogic KNX Switch/Blind Master or a SpaceLogic KNX Universal Dimming Master.

For independent control of up to 4 blind/roller shutter drives or for switching up to 8 loads via make contacts. The function of the blind or switching channels is freely configurable.

The ETS programming is carried out in the ETS application of the Master. The Master controls the function of the Extension, the power supply and communication to the KNX bus.

All outputs can be operated manually using the Master's keypad.

On the Extension a green LED indicates readiness for operation, a red manual operation LED shows whether the Extension is controlled manually.

For installation on DIN rails TH35 according to EN 60715. The connection to the Master or another Extension is made either with a Module Link or with a Cable Link.

KNX software functions: The functions are set in the KNX application of the Master

Supply voltage: via link interface
Nominal voltage: AC 250 V, 50-60 Hz
Nominal current: 16 A AC-1, IEC 60947-4-1 / 10 A, IEC 60669-2-5

For each blind output:
Motor load: 1000 VA

For each switch output:
Nominal load
Incandescent lamps: 2300 W
Halogen lamps: 2300 W
LED: 200 W
Capacitive load: 10 AX, max. 140 µF
Inductive load: 10 A, cosφ = 0.6
Relay data - inrush current: max. 800 A/200 µs, max. 165 A/20 ms

Device width: 4 modules = approx. 72 mm
In KNX, to be completed with: SpaceLogic KNX Switch/Blind Master MTN6705-0008, SpaceLogic KNX Universal Dimming Master MTN6710-0102
Accessories: SpaceLogic KNX Cable Link S MTN6941-0001, SpaceLogic KNX Cable Link L MTN6941-0002
Contents: With Module Link..





SpaceLogic KNX Cable Link S



Version	Art. no.
30 cm	**MTN6941-0001**

The Cable Link connects Master/Extension or Extension/Extension that are not placed directly next to each other on the DIN rail.
Length: 30 cm

SpaceLogic KNX Cable Link L



Version	Art. no.
150 cm	**MTN6941-0002**

The Cable Link connects Master/Extension or Extension/Extension that are not placed directly next to each other on the DIN rail.
Length: 150 cm



SpaceLogic KNX Module Link




Version	Art. no.
	MTN6940-0000

The Module Link connects Master/Extension or Extension/Extension that are placed directly next to each other on the DIN rail.



Blind/switch actuator REG-K/8x/16x/10 with manual mode



Version	Art. no.
light grey	**MTN649908**


For independent control of up to 8 blind/roller shutter drives or for switching up to 16 loads via make contacts. The function of the blind or switching channels is freely configurable. All blind/switch outputs can be operated manually using push-buttons.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Weather alarm. 8-bit positioning for height and slats. Scenes. Status and feedback function.
Switch actuator functions: Operation as break contact/make contact. Programmable behaviour for download. Delay functions for each channel. Staircase lighting function with/without manual OFF function. Cut-out warning for staircase lighting function. Scenes. Central function. Disable function. Logic operation or priority control. Status feedback function for each channel.
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each blind output:
Nominal current: 10 A, inductive load cosφ = 0.6
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
For each switch output:
Nominal current: 10 A, ohmic load cosφ = 1
10 A, inductive load cosφ = 0.6
Nominal load
Incandescent lamps: AC 100 V, max. 869 W
AC 230 V, max. 2000 W
AC 240 V, max. 2086 W
Halogen lamps: AC 100 V, max. 739 W
AC 230 V, max. 1700 W
AC 240 V, max. 1773 W
Fluorescent lamps: AC 100 V, max. 434 VA
AC 230 V, max. 1000 VA
AC 240 V, max. 1043 VA
parallel-compensated
Capacitive load: AC 230 V, 10 A, max. 105 µF
External auxiliary voltage (optional):
Nominal voltage: AC 110-240 V ±10%
Operating voltage: min. AC 92 V - max. AC 265 V
Device width: 8 modules = approx. 144 mm
Note: The blind actuator/switch actuator cannot be used in conjunction with the weather-dependent automatic functions of the weather combi-sensor/DCF77 art. no. MTN663692. If you require these functions then use the blind actuators art. no. MTN6498...
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Blind / Switch Actuators



Blind / switch actuator REG-K/12x/24x/10 with manual mode



Version	Art. no.
light grey	**MTN649912**

For independent control of up to 12 blind/roller shutter drives or for switching up to 24 loads via make contacts. The function of the blind or switching channels is freely configurable. All blind/switch outputs can be operated manually using push-buttons.
Channel status display via LEDs. A green LED indicates readiness for operation.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Blind functions: Blind type. Running time. Idle time. Step interval. Weather alarm. 8-bit positioning for height and slats. Scenes. Status and feedback function.
Switch actuator functions: Operation as break contact/make contact. Programmable behaviour for download. Delay functions for each channel. Staircase lighting function with/without manual OFF function. Cut-out warning for staircase lighting function. Scenes. Central function. Disable function. Logic operation or priority control. Status feedback function for each channel.
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
For each blind output:
Nominal current: 10 A, inductive load cosφ = 0.6
Motor load: AC 100 V, max. 434 W
AC 230 V, max. 1000 W
AC 240 V, max. 1043 W
For each switch output:
Nominal current: 10 A, ohmic load cosφ = 1
10 A, inductive load cosφ = 0.6
Nominal load
Incandescent lamps: AC 100 V, max. 869 W
AC 230 V, max. 2000 W
AC 240 V, max. 2086 W
Halogen lamps: AC 100 V, max. 739 W
AC 230 V, max. 1700 W
AC 240 V, max. 1773 W
Fluorescent lamps: AC 100 V, max. 434 VA
AC 230 V, max. 1000 VA
AC 240 V, max. 1043 VA
parallel-compensated
Capacitive load: AC 230 V, 10 A, max. 105 µF
External auxiliary voltage (optional):
Nominal voltage: AC 110-240 V ±10%
Operating voltage: min. AC 92 V - max. AC 265 V
Device width: 12 modules = approx. 216 mm
Note: The blind actuator/switch actuator cannot be used in conjunction with the weather-dependent automatic functions of the weather combi-sensor/DCF77 art. no. MTN663692. If you require these functions then use the blind actuators art. no. MTN6498...
Contents: With bus connecting terminal and cable cover.

Hybrid Actuators



SpaceLogic KNX Hybrid Switch Actuator REG-K/4x250/10 with manual mode



Version	Art. no.	
4 channels, white	**MTN6700-0104**	New

For the Chinese market.

For independent switching of 4 loads or for controlling up to 2 blinds/roller shutters, 1 fan coil with 3 levels, two 2-pipe valve controls or one 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 9 mA, maximum 20 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 300 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 2x 6-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 320 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 72x90x64 mm

Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Hybrid Actuators



SpaceLogic KNX Hybrid Switch Actuator REG-K/8x250/10 with manual mode



Version	Art. no.	
8 channels, white	**MTN6700-0108**	New

For the Chinese market.

For independent switching of 8 loads or for controlling up to 4 blinds/roller shutters, 2 fan coils with 3 levels, four 2-pipe valve controls or two 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 10 mA max. 22 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 250 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 8 channels: 3x 6-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 192 A/1.2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 72x90x64 mm

Contents: With bus connecting terminal and cable cover.

Hybrid Actuators



SpaceLogic KNX Hybrid Switch Actuator REG-K/16x250/10 with manual mode

Version	Art. no.	
16 channels, white	**MTN6700-0116**	New

For the Chinese market.

For independent switching of 16 loads or for controlling up to 8 blinds/roller shutters, 4 fan coils with 3 levels, eight 2-pipe valve controls or four 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 10 mA max. 26 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz


Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 300 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 4x 8-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 320 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 216x90x64 mm

Contents: With bus connecting terminal and cable cover.

Hybrid Actuators

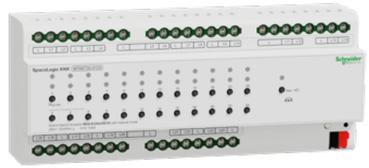

SpaceLogic KNX Hybrid Switch Actuator REG-K/24x250/10 with manual mode

Version	Art. no.	
24 channels, white	**MTN6700-0124**	New

For the Chinese market.

For independent switching of 24 loads or for controlling up to 12 blinds/roller shutters, 6 fan coils with 3 levels, twelve 2-pipe valve controls or six 4-pipe valve control. All functions are freely configurable and can be operated manually with a switch on the device.
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 12 mA max. 28 mA/24 V
KNX power consumption: < 840 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 10 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 6 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 2500 W
Fluorescent lamp: 2500 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 1100 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 900 W
LED lamp: 300 W, cos φ ≥ 0.6
Capacitive loads: 10 AX, 140 µF
Motors: 1500 VA, cos φ ≥ 0.6
Minimum switching current: 100 mA/12 V AC
Connection KNX: Bus connection terminal
Connection port mains: screw terminal blocks, 5x 8-gang

Relay data
Switching frequency at rated load: Maximum 60 operation/min
Mechanical service life: >1x10^6
Inrush current: 320 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Dimensions (WxHxD): 216x90x64 mm

Contents: With bus connecting terminal and cable cover.

Hybrid Actuators



SpaceLogic KNX Switch Actuator REG-K/4x250/20 with manual mode



Version	Art. no.	
4 channels, white	**MTN6700-0304**	**New**

For the Chinese market.

The actuator is used for switching 4 loads, or can be used as a 4-channel heating acutator for valves (without heating controller).
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions:
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 6.5 mA, max. 19 mA/24 V
KNX power consumption: < 600 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 20 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 16 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 4000 W
Fluorescent lamp: 4000 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 3000 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 2200 W
LED lamp: 750 W, cos φ ≥ 0.6
Capacitive loads: 20 AX, 200 µF
Motors: 4000 VA, cos φ ≥ 0.6


Minimum switching current: 100 mA/12 V AC
Connection port KNX: Bus connection terminal
Connection port Mains: Screw terminal blocks, 1x8-gang

Relay data
Switching frequency at rated load: for one channel: 60 operations/min
for all channels: 30 operations/min
Mechanical service life: >1x10^6
Inrush current: 500 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Product dimensions (WxHxD): 4 channels: 72 x 90 x 64 mm

Contents: With bus connecting terminal and cable cover.

Hybrid Actuators



SpaceLogic KNX Switch Actuator REG-K/8x250/20 with manual mode



Version	Art. no.	
8 channels, white	**MTN6700-0308**	**New**

For the Chinese market.

The actuator is used for switching 8 loads, or can be used as a 8-channel heating acutator for valves (without heating controller).
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions:
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 6.5 mA, max. 19 mA/24 V
KNX power consumption: < 600 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 20 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 16 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 4000 W
Fluorescent lamp: 4000 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 3000 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 2200 W
LED lamp: 750 W, cos φ ≥ 0.6
Capacitive loads: 20 AX, 200 µF
Motors: 4000 VA, cos φ ≥ 0.6

Minimum switching current: 100 mA/12 V AC
Connection port KNX: Bus connection terminal
Connection port Mains: Screw terminal blocks, 2x8-gang

Relay data
Switching frequency at rated load: for one channel: 60 operations/min
for all channels: 8 channels 20 operations/min
Mechanical service life: >1x10^6
Inrush current: 500 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Product dimensions (WxHxD): 8 channels: 144 x 90 x 64 mm

Contents: With bus connecting terminal and cable cover.

Hybrid Actuators



SpaceLogic KNX Switch Actuator REG-K/12x250/20 with manual mode



Version	Art. no.	
12 channels, white	**MTN6700-0312**	**New**

For the Chinese market.

The actuator is used for switching 12 loads, or can be used as a 12-channel heating acutator for valves (without heating controller).
A green LED indicates readiness for operation after the application has been loaded.
For mounting on DIN rails TH35 according to EN61715. The bus connection is made via a bus connection terminal.

General KNX software functions: Live signal, enabling safety priority function, central control of switching/curtains function, sending delay after bus voltage recovery

Switching actuator functions:
Preset, Logic, Scene, Threshold, Safety, Forced, Locking, Central, Time function for each channel including delay, flashing and staircase timer, relay state after bus voltage failure/ recovery/ETS download, object value of the Switch object after voltage recovery, status feedback for each channel

Heating actuator functions
PWM cycle time for continuous, 1 bit/1 byte control telegram, Valve protection, Safety, Locking, Forced, Cyclic surveillance, Operation as NC/NO, Valve position after bus voltage failure or recovery, Contact response value when contact is opened or closed

Power supply: KNX Bus
Rated current: 6.5 mA, max. 19 mA/24 V
KNX power consumption: < 600 mW
Nominal voltage: AC 250 V, 50/60 Hz

Nominal power for each contact:
AC1 20 A operation (cos φ = 0.8) accord. with IEC 60947-4-1
AC3 16 A operation (cos φ = 0.45) accord. with IEC 60947-4-1
Incandescent lamp: 4000 W
Fluorescent lamp: 4000 W
Electronic transformer for extra low voltage lamps (e.g. halogen lamps): 3000 W
Iron core transformer for extra low voltage lamps (e.g. halogen lamps): 2200 W
LED lamp: 750 W, cos φ ≥ 0.6
Capacitive loads: 20 AX, 200 µF
Motors: 4000 VA, cos φ ≥ 0.6

Minimum switching current: 100 mA/12 V AC
Connection port KNX: Bus connection terminal
Connection port Mains: Screw terminal blocks, 3x8-gang

Relay data
Switching frequency at rated load: for one channel: 60 operations/min
for all channels: 12 operations/min
Mechanical service life: >1x10^6
Inrush current: 500 A/2 ms
Protection type: IP20
Protection class: II
Insulation category: Overvoltage category III, pollution degree 2

Environmental conditions
Operating temperature: -5...+45 °C
Storage temperature: -25 ...+55 °C
Transport temperature: -25 ...+70°C
Maximum humidity: 93 %, no condensation
Installation height: As high as 2000 m above sea level
Product dimensions (WxHxD):12 channels 216 x 90 x 64 mm

Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Dimming Actuators Overview

	SpaceLogic KNX Universal Dimming Master	SpaceLogic KNX Universal Dimming Extension	KNX Universal dimming actuator LL REG-K/2x230/300 W	SpaceLogic KNX Universal dimming actuator LL REG-K/4x230/250 W	KNX Universal dimming actuator REG-K/4x230/150 W	KNX Universal dimming actuator REG-K/230/500 W	KNX Universal dimming actuator REG-K/230/1000 W
							
Article number	**MTN6710-0102**	**MTN6810-0102**	**MTN6710-0002**	**MTN6710-0004**	**MTN649315**	**MTN649350**	**MTN649310**
Number of channels	2	2	2	4	4	1	1
Device width	4 modules	4 modules	4 modules	8 modules	6 modules	4 modules	4 modules
Manual operation push-buttons	■	■	■	■	■	■	■
Connecting terminal (consumer load)	Screw terminals	Screw terminals	Plug-in screw terminals	Plug-in screw terminals	Plug-in screw terminals	Plug-in screw terminals	Plug-in screw terminals
Nominal voltage	AC 110 - 240 V 50/60 Hz	AC 110 - 240 V 50/60 Hz	AC 110 - 130 V AC 220 - 230 V 50/60 Hz	AC 110 - 130 V AC 220 - 230 V 50/60 Hz	AC 220-230 V, 50/60 Hz	AC 220-230 V, 50/60 Hz	AC 110-230 V, 50/60 Hz; 0.22-4.3 A 110 V, 50 Hz: 24-480 VA 230V, 50 Hz: 50-1000 VA 110 V, 60 Hz: 24-400 VA 230V, 60 Hz: 50-850 VA
Halogen load at 230 V							
■ Configuration of 4 channels	—	—	—	4 x 250 W/VA	4 x 150 W/VA	—	—
■ Configuration of 3 channels	—	—	—	1 x 350 W/VA, 2 x 250 W/VA	1x300 W/VA, 2x150 W/VA	—	—
■ Configuration of 2 channels	2x 350 W	2x 350 W	2x300 W/VA (230V), 2x150 W/VA (110V)	2x350 W/VA (230V)	2x300 W/VA	—	—
■ Configuration of 1 channel	1x 350 W	1x 350 W	1x400 W/VA (230V), 1x200 W/VA (110V)	1x350 W/VA (230V)	1x300 W/VA	1x500 W/VA	1x1000 W/VA
Minimum resistive load	—	—	4 W	4 W	25 W	25 W	25 W
Minimum resistive-inductive load	—	—	25 VA	25 VA	50 VA	50 VA	50 VA
Minimum resistive-capacitive load	—	—	4 W	4 W	50 VA	50 VA	50 VA
Automatic load detection / leading edge (RL-LED, ESL, CFL)	■ / ■	■ / ■	■ / ■	■ / ■	■ / —	■ / —	■ / —
Connection of different Phases	■	■	■	■	—	—	—
Relay for load separation	—	—	■	■	—	—	—
Input for extension unit operation, lockable (switching, staircase lighting function)	—	—	—	—	AC 230 V, 50/60 Hz, for mechanical push-buttons	AC 230 V, 50/60 Hz, for mechanical push-buttons	AC 110-230 V, 50/60 Hz, for mechanical push-buttons
Software							
Manual operation enable/disable via bus		The software functions are provided by the master device	■	■	■	■	■
Dimming function ■ Minimum dimming value / Maximum dimming value ■ Starting behav. / Memory function / 50% brightness (ESL/CFL) ■ Dimming object switches channel ■ Value object switches channel ■ Same dimming time at central function and scenes ■ Delay times for ON and OFF ■ Base dimming curve with 3 threholds ■ Dimming time reduction via object ■ 4 preconfigured dimming sets for the dimming time reduction*	■ / ■ ■ / ■ / ■ ■ ■ ■ ■ ■ ■ ■		■ / ■ ■ / ■ / ■ ■ ■ ■ ■ ■ ■ ■	■ / ■ ■ / ■ / ■ ■ ■ ■ ■ ■ ■ ■	■ / ■ ■ / ■ / — ■ ■ ■ ■ ■ ■ ■	■ / ■ ■ / ■ / — ■ ■ ■ ■ ■ ■ ■	■ / ■ ■ / ■ / — ■ ■ ■ ■ ■ ■ ■
Staircase lighting function with/without manual OFF ■ Retriggerable ■ Not retriggerable ■ Time addable ■ Prewarn	■ ■ ■ ■ ■		■ ■ ■ ■ ■	■ ■ ■ ■ ■	■ ■ ■ ■ ■	■ ■ ■ ■ ■	■ ■ ■ ■ ■
Scenes (1 byte)			8	8	8	8	8
Central function	■		■	■	■	■	■
Higher priority function	■ Disable function ■ Logic operation or priority function		■ Disable function ■ Logic operation or priority function	■ Disable function ■ Logic operation or priority function	■ Disable function ■ Logic operation or priority function	■ Disable function ■ Logic operation or priority function	■ Disable function ■ Logic operation or priority function

*4 switchable speed sets with 6 values. This corresponds to 24 storable dimming speeds for:
Switch on, switch off staircase timer, dim, values, scenes, higher priority functions.

SpaceLogic KNX

Dimming Actuators Overview

Dimming Actuators Overview

	SpaceLogic KNX Universal Dimming Master	SpaceLogic KNX Universal Dimming Extension	KNX Universal dimming actuator LL REG-K/2x230/300 W	SpaceLogic KNX Universal dimming actuator LL REG-K/4x230/250 W	KNX Universal dimming actuator REG-K/4x230/150 W	KNX Universal dimming actuator REG-K/230/500 W	KNX Universal dimming actuator REG-K/230/1000 W
							
Article number	**MTN6710-0102**	**MTN6810-0102**	**MTN6710-0002**	**MTN6710-0004**	**MTN649315**	**MTN649350**	**MTN649310**
Logic operation ■ AND, OR ■ Switch object has an inverted impact to the logic operation	■ ■	The software functions are provided by the master device	■ ■	■ ■	■ ■	■ ■	■ ■
Disable function ■ Behaviour of locking after bus voltage recovery ■ Behavior at the start/end of the locking	■ ■		■ ■	■ ■	■ ■	■ ■	■ ■
Behaviour of ■ main voltage recovery ■ bus voltage recovery ■ download ■ bus voltage failure	■ ■ ■ –		■ ■ ■ –	■ ■ ■ –	– ■ ■ –	– ■ ■ –	– ■ ■ –
Status messages ■ Switch ■ Brightness value ■ Error	■ ■ ■		■ ■ ■	■ ■ ■	■ ■ ■	■ ■ ■	■ ■ ■

SpaceLogic KNX

Dimming Actuators Overview

Dimming actuators



SpaceLogic KNX Universal Dimming Master



Version	Art. no.
	MTN6710-0102

Dimming actuator with 2 channels for switching and dimming **dimmable LED lamps**, incandescent lamps, HV halogen lamps, LV halogen lamps using dimmable wound transformers or electronic transformers or dimmable compact fluorescent lamps.
(leading and trailing-edge phases)

The Master automatically recognises the connected load. This happens in the background when switching on. Combinations of ohmic and inductive, or ohmic and capacitive loads can also be connected. Combinations of inductive and capacitive loads must not be connected. No flickering of LEDs in switched-off state.

The number of dimming channels can be increased by connecting SpaceLogic KNX Universal Dimming Extensions. By connecting a SpaceLogic KNX Switch/Blind Extension, the Master's channels can be increased with Switch/Blind channels. A maximum of 2 Extensions can be connected to the Master. The Master controls the Extensions, their power supply and communication with the bus.

With screw terminals, short-circuit, open circuit and excess temperature protection with soft start lamp start. Different phases can be connected.

All dimming outputs can be operated manually using push-buttons (On/Off, Dimm UP/Down, LED mode/Automode, One/Two button operation).

Channel status display via LEDs. A green LED indicates readiness for operation.

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.

General KNX software functions: Energy saving, device safety, device health, manual operation, PIN code for firmware update.

Dimmer actuator functions: Dimming operation by KNX, dimming operation by manual switch, enable/disable manual mode by bus, automatic dimming operating mode or special leading edge phase for RL LED mode, various dimming curves and dimming rates, same dimming time, minimum/maximum dimming value, starting behaviour, 50% brightness when starting ESL/CFL lamp, dimming/value object switches channel, ON/OFF delay, staircase lighting function (with/without manual OFF function, non-/retriggerable, prewarning function), scenes (up to 16 internally stored brightness values can be retrieved), priority control, disable function (behaviour of locking), status feedback (switching state, brightness value, fault), behaviour on bus voltage recovery/download

Switch/Blind actuator functions: same as SpaceLogic KNX Switch/Blind Master; only activated when a SpaceLogic KNX Switch/Blind Extension is connected.

Supply voltage: KNX bus, approx. 7.5 mA (Master), approx. 10 mA (Master + 1 Extension), approx. 12.5 mA (Master + 2 Extensions)

Dimmer type: 3-wire, RC mode, RL mode, RL LED mode

Power dissipation: < 6 W
Dimmer Outputs
Channels: 2 (different phases possible)
Nominal voltage: AC 110 - 240 V, 50/60 Hz
Nominal power:
220-240 V: Incandescent, HV, electronic/wounded transformators: 2x 350 W/VA
220-240 V: LED lamp in RC mode: 2x 200 W, max. 1.3 A
220-240 V: LED lamp in RL mode: 2x 60 W, max. 0.5 A
110-127 V: Incandescent, HV, electronic/wounded transformators: 2x 200 W/VA
110-127 V: LED lamp in RC mode: 2x 135 W, max. 1.5 A
110-127 V: LED lamp in RL mode: 2x 54 W, max. 0.6 A
Device width: 4 modules = approx. 72 mm
Accessories: SpaceLogic KNX Universal Dimming Extension MTN6810-0102, SpaceLogic KNX Switch/Blind Extension MTN6805-0008
Contents: With bus connecting terminal

SpaceLogic KNX

Dimming Actuators / Control Units



SpaceLogic KNX Universal Dimming Extension



Version	Art. no.
	MTN6810-0102

The SpaceLogic KNX Universal Dimming Extension is a dimming actuator that extends the channels of a SpaceLogic KNX Universal Dimming Master.

For independent control of up to 2 dimmable loads such as **dimmable LED lamps**, incandescent lamps, HV halogen lamps, LV halogen lamps using dimmable wound transformers or electronic transformers or dimmable compact fluorescent lamps.
(leading and trailing-edge phases)

The ETS programming is carried out in the ETS application of the Master. The Master controls the function of the Extension, the power supply and and communication to the KNX bus. Channel status is displayed via LEDs on the Master's keypad.

With screw terminals, short-circuit, open circuit and excess temperature protection with soft start lamp start. Different phases can be connected.

All outputs can be operated manually using push-buttons of the Master (On/Off, Dimm UP/Down, LED mode/Automode, One/Two button operation).

A green LED indicates readiness for operation, a red manual operation LED shows whether the Extension is controlled manually. For installation on DIN rails TH35 according to EN 60715. The connction to the Master or another Extension is made either with a Module Link or with a Cable Link.

Dimmer actuator functions: Dimming operation by KNX, dimming operation by manual switch, enable/disable manual mode by bus, automatic dimming operating mode or special leading edge phase for RL LED mode, various dimming curves and dimming rates, same dimming time, minimum/maximum dimming value, starting behaviour, 50% brightness when starting ESL/CFL lamp, dimming/value object switches channel, ON/OFF delay, staircase lighting function (with/without manual OFF function, non-/retriggerable, prewarning function), scenes (up to 16 internally stored brightness values can be retrieved), priority control, disable function (behaviour of locking), status feedback (switching state, brightness value, fault), behaviour on bus voltage recovery/download

Supply voltage: via link interface

Dimmer type: 3-wire, RC mode, RL mode, RL LED mode

Power dissipation: < 6 W
Dimmer Outputs
Channels: 2 (different phases possible)
Nominal voltage: AC 110 - 240 V, 50/60 Hz
Nominal power:
220-240 V: Incandescent, HV, electronic/wounded transformators: 2x 350 W/VA
220-240 V: LED lamp in RC mode: 2x 200 W, max. 1.3 A
220-240 V: LED lamp in RL mode: 2x 60 W, max. 0.5 A
110-127 V: Incandescent, HV, electronic/wounded transformators: 2x 200 W/VA
110-127 V: LED lamp in RC mode: 2x 135 W, max. 1.5 A
110-127 V: LED lamp in RL mode: 2x 54 W, max. 0.6 A
Device width: 4 modules = approx. 72 mm
To be completed with: SpaceLogic KNX Universal Dimming Master MTN6710-0102
Accessories: SpaceLogic KNX Cable Link S MTN6941-0001, SpaceLogic KNX Cable Link L MTN6941-0002
Contents: With Module Link.







SpaceLogic KNX Cable Link S



Version	Art. no.
30 cm	**MTN6941-0001**

The Cable Link connects Master/Extension or Extension/Extension that are not placed directly next to each other on the DIN rail.
Length: 30 cm

SpaceLogic KNX Cable Link L



Version	Art. no.
150 cm	**MTN6941-0002**

The Cable Link connects Master/Extension or Extension/Extension that are not placed directly next to each other on the DIN rail.
Length: 150 cm

SpaceLogic KNX Module Link



Version	Art. no.
	MTN6940-0000


The Module Link connects Master/Extension or Extension/Extension that are placed directly next to each other on the DIN rail.

SpaceLogic KNX

Dimming Actuators / Control Units



KNX universal dimming actuator LL REG-K/2x230/300 W



Version	Art. no.
light grey	**MTN6710-0002**

LED/ESL/CFL dimmer
For switching and dimming **dimmable LED lamps**, incandescent lamps, HV halogen lamps, LV halogen lamps using dimmable wound transformers or electronic transformers or dimmable compact fluorescent lamps.
(leading and trailing-edge phases)
With integral bus coupler, screw terminals, short-circuit, open circuit and excess temperature protection with soft start lamp start.
Different phases can be connected.
The dimmer actuator automatically recognises the connected load. This happens in the background when switching on. Combinations of ohmic and inductive, or ohmic and capacitive loads can also be connected. Combinations of inductive and capacitive loads must not be connected. No flickering of LEDs in switched-off state.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Dimming operation by KNX, dimming and emergency operation by manual switch, enable/block manual mode by bus, automatic dimming operating mode or leading edge phase for certain LED/ESL/CFL lamps, load separation possible in OFF state, various dimming curves and dimming rates, same dimming time, minimum/maximum dimming value, starting behaviour, memory function, 50% brightness when starting ESL/CFL lamp, dimming/value object switches channel, ON/OFF delay, staircase lighting function (with/without manual OFF function, non-/retriggerable, time accumulating, warning function), scenes (up to 8 internally stored brightness values can be retrieved), central function, logic operations (AND/OR) or priority control, disable function (behaviour of locking), status feedback (switching state, brightness value, fault), behaviour on mains voltage recovery/bus voltage recovery/download.
Nominal voltage: AC 110 - 130 V / AC 220 - 230 V, 50/60 Hz
Channels: 2 (different phases possible)
Nominal power: 2 x 300 W/VA (230 V), 2 x 150 W/VA (110 V)
1 channel: 1 x 400 W/VA (230 V), 1 x 200 W/VA (110 V)
Minimum load/channel: 4 W (ohmic)
4 W (ohmic-capacitive)
25 VA (ohmic-inductive)
Device width: 4 modules = approx. 72 mm
Note: Information about the “**Dimming LED lamps**” can be obtained on the Internet at “Schneider-Electric dimmer test”. http://schneider-electric.dimmer-test.com
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX universal dimming actuator LL REG-K/4x230/250 W

Version	Art. no.
light grey	**MTN6710-0004**

LED/ESL/CFL dimmer
For switching and dimming **dimmable LED lamps**, incandescent lamps, HV halogen lamps, LV halogen lamps using dimmable wound transformers or electronic transformers or dimmable compact fluorescent lamps.
(leading and trailing-edge phases)
With integral bus coupler, screw terminals, short-circuit, open circuit and excess temperature protection with soft start lamp start.
Different phases can be connected.
The dimmer actuator automatically recognises the connected load. This happens in the background when switching on. Combinations of ohmic and inductive, or ohmic and capacitive loads can also be connected. Combinations of inductive and capacitive loads must not be connected. No flickering of LEDs in switched-off state.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Dimming operation by KNX, dimming and emergency operation by manual switch, enable/block manual mode by bus, automatic dimming operating mode or leading edge phase for certain LED/ESL/CFL lamps, load separation possible in OFF state, various dimming curves and dimming rates, same dimming time, minimum/maximum dimming value, starting behaviour, memory function, 50% brightness when starting ESL/CFL lamp, dimming/value object switches channel, ON/OFF delay, staircase lighting function (with/without manual OFF function, non-/retriggerable, time accumulating, warning function), scenes (up to 8 internally stored brightness values can be retrieved), central function, logic operations (AND/OR) or priority control, disable function (behaviour of locking), status feedback (switching state, brightness value, fault), behaviour on mains voltage recovery/bus voltage recovery/download.
Nominal voltage: AC 110 - 130 V / AC 220 - 230 V, 50/60 Hz
Channels: 4 (different phases possible)
Nominal power: 4 x 250 W/VA (230 V), 4 x 125 W/VA (110 V)
3 channels: 1 x 350 W/VA and 2 x 250 W/VA (230 V), 1 x 175 W/VA and 2 x 125 W/VA (110 V)
2 channels: 2 x 350 W/VA (230 V), 2 x 175 W/VA (110 V)
Minimum load/channel: 4 W (ohmic)
4 W (ohmic-capacitive)
25 VA (ohmic-inductive)
Device width: 8 modules = approx. 144 mm
Note: Information about the "**Dimming LED lamps**" can be obtained on the Internet at "Schneider-Electric dimmer test". http://schneider-electric.dimmer-test.com
Contents: With bus connecting terminal and cable cover.



Universal dimming actuator REG-K/4x230/150 W

Version	Art. no.
light grey	**MTN649315**

AC 230 V, 50-60 Hz
For switching and dimming incandescent lamps, HV halogen lamps and LV halogen lamps using dimmable wound transformers or electronic transformers.
(Phase control and phase alignment)
With integral bus coupler, screw terminals, short-circuit, open-circuit and excess temperature protection with soft start function.
The dimming actuator automatically recognises the connected load. Combinations of ohmic and inductive, or ohmic and capacitive loads can also be connected. Combinations of inductive and capacitive loads must not be connected.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Dimming operation via KNX, extension units and on the device, different dimming curves and dimming speeds, the same dimming time, memory function, ON/OFF delay, staircase time function with/without manual OFF function, scenes (up to eight stored brightness values can be retrieved), central function, logic operation or priority control, blocking function, status feedback.
Nominal voltage: AC 220 - 230 V, 50/60 Hz
Nominal power/channel: max. 150 W/VA
25 W minimum load (ohmic)
50 VA minimum load (ohmic/inductive/capacitive)
Input (extension unit operation): AC 230 V, 50/60 Hz (same phase as the dimming channels)
Device width: 6 modules = approx. 105 mm
Extension unit operation: Extension TELE insert MTN573998
Contents: With bus connecting terminal and cable cover.



Universal dimming actuator REG-K/230/500 W

Version	Art. no.
light grey	**MTN649350**

AC 230 V, 50-60 Hz
For switching and dimming incandescent lamps, HV halogen lamps and LV halogen lamps using dimmable wound transformers or electronic transformers.
(Phase control and phase alignment)
With integral bus coupler, screw terminals, short-circuit, open-circuit and excess temperature protection with soft start function.
The dimming actuator automatically recognises the connected load. Combinations of ohmic and inductive, or ohmic and capacitive loads can also be connected. Combinations of inductive and capacitive loads must not be connected.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Dimming operation via KNX, extension units and on the device, different dimming curves and dimming speeds, the same dimming time, memory function, ON/OFF delay, staircase time function with/without manual OFF function, scenes (up to eight stored brightness values can be retrieved), central function, logic operation or priority control, blocking function, status feedback.
Nominal voltage: AC 220 - 230 V, 50/60 Hz
Nominal power/channel: max. 500 W/VA
25 W minimum load (ohmic)
50 VA minimum load (ohmic/inductive/capacitive)
Input (extension unit operation): AC 230 V, 50/60 Hz (same phase as the dimming channel)
Device width: 4 modules = approx. 72 mm
Extension unit operation: Extension TELE insert MTN573998
Contents: With bus connecting terminal and cable cover.



Universal dimming actuator REG-K/230/1000 W



Version	Art. no.
light grey	**MTN649310**

AC 230 V, 50-60 Hz
For switching and dimming incandescent lamps, HV halogen lamps and LV halogen lamps using dimmable wound transformers or electronic transformers.
(Phase control and phase alignment)
With integral bus coupler, screw terminals, short-circuit, open-circuit and excess temperature protection with soft start function.
The dimming actuator automatically recognises the connected load. Combinations of ohmic and inductive, or ohmic and capacitive loads can also be connected. Combinations of inductive and capacitive loads must not be connected.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Dimming operation via KNX, extension units and on the device, different dimming curves and dimming speeds, the same dimming time, memory function, ON/OFF delay, staircase time function with/without manual OFF function, scenes (up to eight stored brightness values can be retrieved), central function, logic operation or priority control, blocking function, status feedback.
Nominal voltage: AC 110-230 V ±10%
Operating voltage: min. AC 92 V - max. AC 253 V
Mains frequency: 50/60 Hz ±2%
Nominal load
Ohmic loads: AC 110 V /50 Hz, 14-480 W
AC 230 V /50 Hz, 30-1000 W
AC 110 V /60 Hz, 14-400 W
AC 230 V /60 Hz, 30-850 W
Inductive/capacitive loads: AC 110 V /50 Hz, 24-480 VA
AC 230 V /50 Hz, 50-1000 VA
AC 110 V /60 Hz, 24-400 VA
AC 230 V /60 Hz, 50-850 VA
Input (extension unit operation): AC 110-230 V, 50/60 Hz (same phase as the dimming channel)
Device width: 4 modules = approx. 72 mm
Extension unit operation: Extension TELE insert MTN573998
Contents: With bus connecting terminal and cable cover.

SpaceLogic KNX

Dimming Actuators / Control Units



SpaceLogic KNX Flush Mounted Universal Dimming Acutator 1g with 3 binary inputs



Version	Art. no.
	MTN6003-0013

1-gang universal dimming actuator with three inputs for installation in a size 60 switch box.
Floating contacts can be connected to the three inputs. Optionally, an NTC temperature sensor can be connected to the third input.
The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable.
The connecting cable for the inputs can be extended to a max. of 10 m.
KNX Secure compatible
KNX software functions: Dimming actuator function:
Switching and dimming lamps. Switch on and dimming behaviour can be adjusted. Feedback of the switching state and the brightness value. “Soft ON”, “Soft OFF” and time dimmer. Dimming or jumping to brightness values. Time-delayed switch off when a switch off brightness is not reached. Short circuit and load failure signal. 64 Scene function. Blocked operation via an object with parameterisable brightness value at the beginning and the end of blocking. Behaviour of the dimming actuator after bus voltage recovery.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object.
Behaviour when bus voltage recovers. Temperature, Brightness, Color temperature,
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Logic module:
Logic operation, Converter, Blocking element, Comparator, Limit value

Nominal voltage: AC 230 V, 50/60 Hz

Connected load at 25 °C
Incandescent/Halogen lamps: AC 230 V, 20 to 230 W
LV halogen lamps: 20 to 210 VA, wounded transformer / 20 to 210 W, electronic transformer
LED leading edge phase control: AC 230 V, 20 to 210 W/VA
LED trailing edge phase control: AC 230 V, 20 to 230 W

Connected load at 45 °C
Incandescent/Halogen lamps: AC 230 V, 20 to 210 W
LV halogen lamps: 20 to 160 VA, wound transformer / 20 to 160 W, electronic transformer
LED leading edge phase control: AC 230 V, 20 to 160 W/VA
LED trailing edge phase control: AC 230 V, 20 to 210 W

Inputs: 3
Dimensions: 48x50x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)



KNX universal dimming actuator FM 50-210 W/VA with 2 inputs



Version	Art. no.
	MTN6003-0003

1-gang universal dimming actuator with two inputs for installation in a size 60 switch box.
Floating contacts can be connected to the two inputs.
The inputs have already been assigned to the actuator at the factory, enabling operation without programming.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Dimming actuator function:
Switching and dimming lamps. Switch on and dimming behaviour can be adjusted. Feedback of the switching state and the brightness value. “Soft ON”, “Soft OFF” and time dimmer. Dimming or jumping to brightness values. Time-delayed switch off when a switch off brightness is not reached. Short circuit and load failure signal. Scene operation. Blocked operation via an object with parameterisable brightness value at the beginning and the end of blocking. Behaviour of the dimming actuator after bus voltage recovery.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object. Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Nominal voltage: AC 230 V, 50/60 Hz
Connected load
Ohmic load: AC 230 V, 50 to 210 W
Incandescent lamps: AC 230 V, 50 to 210 W
Halogen lamps: AC 230 V, 50 to 210 W
LV halogen lamps: 50 to 210 W/VA, wound transformer
50 to 210 W, electronic transformers
Inputs: 2
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)

SpaceLogic KNX

Dimming Actuators / Control Units

Control units 1-10 V



SpaceLogic KNX Control unit 0-10 V REG-K/1-gang with manual mode



Version	Art. no.
light grey	**MTN647091**

For connecting devices with 0-10 V interface to KNX. With integrated bus coupler and screw terminals (230 V) or plug-in screw terminals (0-10 V). Each individual 230 V switch output can be operated manually with a manual switch.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Different dimming curves and dimming speeds, the same dimming time, memory function, ON/OFF delay, staircase time function with/without manual OFF function, scenes (up to eight stored brightness values can be retrieved), central function, logic operation or priority control, blocking function, status feedback, behaviour on bus voltage recovery.
Switch contact: for switching the electronic ballasts/transformers
Nominal voltage: AC 100-240 V ±10%
Operating voltage: min. AC 90 V - max. AC 265 V
Mains frequency: 50-60 Hz ±10%
Nominal current: 16 A, inductive load $\cos\varphi = 0.6$
Nominal load
Incandescent lamps: AC 100 V, max. 1600 W
AC 230 V, max. 3600 W
AC 240 V, max. 3840 W
Halogen lamps: AC 100 V, max. 1086 W
AC 230 V, max. 2500 W
AC 240 V, max. 2608 W
Fluorescent lamps: AC 100 V, max. 1086 VA
AC 230 V, max. 2500 VA
AC 240 V, max. 2608 VA
parallel-compensated
Capacitive load: AC 100 V, max. 1600 W, 200 µF
AC 230 V, max. 3600 W, 200 µF
AC 240 V, max. 3840 W, 200 µF
0-10 V interface: 0.12-100 mA
Voltage range: DC 0-10 V
Device width: 2.5 HP = approx. 45 mm
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Control unit 0-10 V REG-K/3-gang with manual mode



Version	Art. no.
light grey	**MTN646991**

For connecting devices with 0-10 V interface to KNX. With integrated bus coupler and screw terminals (230 V) or plug-in screw terminals (0-10 V). Each individual 230 V switch output can be operated manually with a manual switch.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Different dimming curves and dimming speeds, the same dimming time, memory function, ON/OFF delay, staircase time function with/without manual OFF function, scenes (up to eight stored brightness values can be retrieved), central function, logic operation or priority control, blocking function, status feedback, behaviour on bus voltage recovery.
Switch contact: for switching the electronic ballasts/transformers
Nominal voltage: AC 230 V, 50-60 Hz
Nominal current: 16 A, cosφ = 0.6
Switching capacity: AC 230 V, 3600 W, cosφ = 1
Capacitive load: AC 230 V, 16 A, 200 µF
Incandescent lamps: AC 230 V, max. 3600 W
Halogen lamps: AC 230 V, max. 2500 W
Fluorescent lamps:
AC 230 V, max. 3600 VA, uncompensated
AC 230 V, max. 2500 VA, with parallel compensation
LV- halogen lamps with wound transformer: max. 2000 VA
0-10 V interface: 0.12-100 mA
Voltage range: DC 0-10 V
Device width: 4 HP = ca. 72 mm
Contents: With bus connecting terminal and cable cover.

DALI gateways



SpaceLogic KNX DALI Gateway Pro



Version	Art. no.
	MTN6725-0101

The SpaceLogic KNX DALI Gateway Pro controls electronic ballasts with DALI interface via the KNX installation bus. The gateway is DALI 2.0 multi-master certified.

The gateway supports KNX longframe communication and is compatible with KNX Security telegram/devices and can be enable in the ETS 5 software. In addition, access to the device itself (e.g. for a download) is protected by KNX Security

It supports ballasts according to EN 62386-102 ed1 (DALI1), devices according to EN 62386-102 ed2 (DALI2), as well as DALI2 motion sensors and light sensors according to EN 62386-303 and EN 62386-304.

The gateway has a DALI output which can control up to 64 ECGs. In addition, up to 8 DALI2 motion detectors or light sensors can be connected. Multi-master operation according to EN 62386-103 ed2 is permitted. The required power supply for the connected ECGs and motion sensors is provided directly from the device. Additional DALI power supplies are not required.

Per gateway the ECGs can be controlled in 16 groups. In addition to the group control the gateway also allows individual control of up to 64 ECGs.

In addition the gateway allows the operation of single battery emergency lights (EN 62386-202). Emergency lighting systems with central battery are also supported.

DALI commissioning and configuration, as well as group assignment and scene setting, can be carried out using:
- the device (display and operating buttons which can be optionally disabled),
- the DCA software,
- the integrated Web server

Functions:
- Two separate user profiles with their own password for IP-webserver
- Effect module with 16 effects and a total of up to 500 commands
- Configuring: scenes, effects, service, maintenance, burn-in, operating hours
- Fast Firmware upgrade possible via IP portOperating: device, ECGs, groups and broadcast
- Colour control via KNX for broadcast and groups
- Displays: Status and error messages
- DT8-Colour control on the DALI side, up to 16 colour templates with up to 300 commands basing on a weekly timer
- DALI-scenes with brightness and colour values
- Scene number 1-64 can be flexible distributed over several devices
- Tunable white control to improve the environment for human beings. Colour control i.e. product presentation, advertising
- Possibility to lock the IP-port
- Possibility to access as User or Admin the web server
- Flexible post installation and a DCA with im- and export for DALI configuration
- Possibility to save ECG StandBy energy of DALI groups if switched OFF

KNX software functions: Switching, dimming and value object per group or ECG. Staircase timer function, status objects, delays between status feedbacks. Detailed error messages per EB and group. Test of DALI ECGs for emergency lighting with central battery or built-in battery with selectable test intervals with old or new format. Parallel broadcast triggering of all ECGs, switch-on/switch-off and colour control. Dimming speeds for relative dimming and dimming values. Dimming value max./min. Various modes (normal, permanent, night, panic). Operating hours counter and automatic burn-in per ECG.

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Supply voltage: AC/DC 100-240 V, 50-60 Hz
Outputs: DALI D+, D-, typical DC 18 V, short-circuit proof, max 250 mA, basic insulation (no SELV)
Type: Multi-Master Application Controller
Supply current: max. 250 mA, guaranteed 160 mA
Interfaces: KNX, RJ-45 Ethernet 100BaseT, DALI
Wire range: Supply 0.5-4 mm², DALI: 0.4-4 mm²
Type of protection: IP 20
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal.



KNX DALI gateway REG-K/1/16(64)/64/IP1



Version	Art. no.
	MTN6725-0001


The KNX DALI gateway connects KNX to the DALI bus. The gateway is a category I control device with an integrated DALI power supply for the ECGs (electronic ballasts / electronic control gear). The device is a Single-Master Controller according to EN 62386 ed/1 and ed/2.
It is able to control DALI ECGs ed/1 and ed/2 -also mixed- but according to single-master controller it cannot support DALI-2 sensors like movement- and presence detectors, switches etc.
Described features are related to Firmware V3.1.3 or higher with DCA and ETS application 7310 most earlier delivered devices can be upgraded
It supports the switching and dimming of up to 64 ECGs in 16 groups and the control up to 16 scenes. The 64 ECGs can be controlled individually or in groups. Error messages of individual ECGs or each connected lamp can be transmitted to the KNX and visualised.

DALI commissioning and configuration, as well as group assignment and scene setting, can be carried out using:
- the device (display and operating buttons which can be optionally disabled),
- the DCA software,
- the integrated Web server

Web server functions:
Access via the LAN network using a PC, PDA or web panel. Commissioning is also made easier using a WLAN adapter. The internal web pages can be used to start up the device, and to configure, operate and display all important functions.
Functions:
- Two separate user profiles with their own password for IP-webserver
- Effect module with 16 effects and a total of up to 500 commands
- Configuring: scenes, effects, service, maintenance, burn-in, operating hours
- Fast Firmware upgrade possible via IP portOperating: device, ECGs, groups and broadcast
- Colour control via KNX for broadcast and groups
- Displays: Status and error messages
- DT8-Colour control on the DALI side, up to 16 colour templates with up to 300 commands basing on a weekly timer
- DALI-scenes with brightness and colour values
- Scene number 1-64 can be flexible distributed over several devices
- Tunable white control to improve the environment for human beings. Colour control i.e. product presentation, advertising
- Possibility to lock the IP-port
- Possibility to access as User or Admin the web server
- Flexible post installation and a DCA with im- and export for DALI configuration
- Possibility to save ECG StandBy energy of DALI groups if switched OFF

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.

KNX software functions: Switching, dimming and value object per group or ECG. Staircase timer function, status objects, delays between status feedbacks. Detailed error messages per EB and group. Test of DALI ECGs for emergency lighting with central battery or built-in battery with selectable test intervals with old or new format. Parallel broadcast triggering of all ECGs, switch-on/switch-off and colour control. Dimming speeds for relative dimming and dimming values. Dimming value max./min. Various modes (normal, permanent, night, panic). Operating hours counter and automatic burn-in per ECG.
Supply voltage: AC/DC 100-240 V, 50/60 Hz
Outputs: DALI D+, D-, DC 16-18 V (basic insulation, not SELV), max. 128 mA, short circuit-proof
Interfaces: KNX, Ethernet RJ-45, DALI
Type: Category I control device (single master)
Wire range: Supply or DALI: 1.5-2.5 mm²
Type of protection: IP 20
Device width: 4 modules = approx. 72 mm
Contents: With bus connecting terminal.



SpaceLogic KNX DALI Gateway Basic REG-K/1/16/64



Version	Art. no.
	MTN6725-0003

The KNX DALI Gateway connects the KNX bus to 1 DALI output. The gateway is a category I DALI control device with an integrated DALI power supply for the ECGs. The device is a Single-Master Application Controller according to EN 62386 ed/1 and ed/2. Starting with firmware version 0.2.6 the gateway is certified according to EN 62386-101/-103 ed2 and is DALI-2.0 single master certified.

It is able to control DALI ECGs ed/1 and ed/2 -also mixed- but according to single-master controller it cannot support DALI-2 sensors like movement- and presence detectors, switches etc. It supports the switching and dimming of up to 64 ECGs in 16 groups and the control of more than 16 scenes.

Different colour commands (e.g. white tone control, RGB, XY and HSV) can be interpreted by KNX push-buttons, for example, and DALI DT8 lights can be activated accordingly.
The operating hours meter logs the operating hours for the groups. Error messages from individual ECGs and groups can be transmitted via the KNX and visualised.
A colour control module allows up to 16 time switch functions for brightness and colour on a weekly basis, provided that the device is connected to a time update system. The up to 16 time programmes with up to 300 commands per DALI output can be enabled or disabled using KNX objects. DALI commissioning and configuration, group allocation and scene set-up can be carried out using the ETS application and an ETS app (DCA).
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming, value and colour objects per group, plus switching, value and colour objects for broadcast control. Staircase timer function with dimmed lights, also for advance warning and normal, continuous, night and panic modes. Differentiated error analysis per EB and group. Scenes with brightness and colour. Energy saving thanks to reduction in EB standby losses due to additional KNX switching actuator. The colour control module can be used to control brightnesses and colours based on a weekly time switch. (Requirement: weekday and time synchronisation) Any time interval possible, up to 90 s.
The up to 16 time programmes can be controlled using KNX objects. Operating hours can be recorded and reset by group, and transmitted by group as an alarm if a threshold value is exceeded. The firmware can be updated using an FAT32-formatted Micro-SD card.
Supply voltage: AC/DC 100-240 V, 50-60 Hz
Outputs: 1x DALI D+, D-, typically 16 V DC, short-circuit proof max. 250 mA, basic insulation (no SELV)
Output current: max. 250 mA, min. 128 mA
Interfaces: KNX, DALI
Type: Single Master application controller. From firmware version 0.2.6 the gateway is certified according to EN 62386-101/-103 ed2 -> DALI-2 compatible
Wire range: Mains supply or DALI: 1 - 2.5 mm²
IP protection rating: IP20
Housing width: 4 HP = approx. 69 mm
Contents: With bus connecting terminal.



SpaceLogic KNX DALI Gateway Basic REG-K/2/16/64



Version	Art. no.
	MTN6725-0004

The KNX DALI Gateway connects the KNX bus to **2 DALI outputs**. The gateway is a category I DALI control device with an integrated DALI power supply for the ECGs. The device is a Single-Master Controller according to EN 62386 ed/1 and ed/2. Starting with firmware version 0.2.6 the gateway is certified according to EN 62386-101/-103 ed2 and is DALI-2.0 single master certified.

It is able to control DALI ECGs ed/1 and ed/2 -also mixed- but according to single-master controller it cannot support DALI-2 sensors like movement- and presence detectors, switches etc. For each DALI output, it supports the switching and dimming of up to 64 ECGs in 16 groups and the control of more than 16 scenes.
Different colour commands (e.g. white tone control, RGB, XY and HSV) can be interpreted by KNX push-buttons, for example, and DALI DT8 lights can be activated accordingly.
The operating hours meter logs the operating hours for the groups. Error messages from individual ECGs and groups can be transmitted via the KNX and visualised.
A colour control module allows up to 16 time switch functions for brightness and colour on a weekly basis, provided that the device is connected to a time update system. The up to 16 time programmes with up to 300 commands per DALI output can be enabled or disabled using KNX objects. DALI commissioning and configuration, group allocation and scene set-up can be carried out using the ETS application and an ETS app (DCA).
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Switching, dimming, value and colour objects per group, plus switching, value and colour objects for broadcast control. Staircase timer function with dimmed lights, also for advance warning and normal, continuous, night and panic modes. Differentiated error analysis per EB and group. Scenes with brightness and colour. Energy saving thanks to reduction in EB standby losses due to additional KNX switching actuator. The colour control module can be used to control brightnesses and colours based on a weekly time switch. (Requirement: weekday and time synchronisation) Any time interval possible, up to 90 s.
The up to 16 time programmes can be controlled using KNX objects. Operating hours can be recorded and reset by group, and transmitted by group as an alarm if a threshold value is exceeded. The firmware can be updated using an FAT32-formatted Micro-SD card.
Supply voltage: AC/DC 100-240 V, 50/60 Hz
Outputs: 2x DALI D+, D-, typically 16 V DC, short-circuit proof max. 250 mA, basic insulation (no SELV)
Output current: max. 250 mA, min. 128 mA
Interfaces: KNX, DALI
Type: Single Master application controller. From firmware version 0.2.6 the gateway is certified according to EN 62386-101/-103 ed2 -> DALI-2 compatible
Wire range: Mains supply or DALI: 1.5 - 2.5 mm²
IP protection rating: IP20
Housing width: 4 HP = approx. 69 mm

Other actuators



- The devices have protection type IP 20 and can only be used indoors. Devices with a different type of protection are labelled separately.

SpaceLogic KNX Analogue actuator REG-K/4-gang



Version	Art. no.
light grey	**MTN682291**

The output channels can be parameterised for different current and voltage signals to control different analogue variables (e.g. servomotors). The actuator has four analogue outputs. For use in connection with the analogue actuator module REG/4-gang, 8 analogue outputs are provided. Connections are made using the sub-bus.
With continuity checking of the current outputs.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
Auxiliary voltage: AC 24 V (+/-10 %)
Analogue outputs: 4
Current signals: 0 ... 20 mA, 4 ... 20 mA
Voltage signals: 0 ... 1 V, 0.. 10 V
Continuity checking: 4 ... 20 mA
Outputs: DC 24 V, 100 mA (total)
Device width: 4 modules = approx. 72 mm
In KNX, to be completed with: SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Contents: With bus connecting terminal and cable cover.

Room temperature control unit, design-independent



SpaceLogic KNX 4" Touch Unit



Version	Art. no.	
glass	**MTN6215-0410**	**New**

The 4” Touch unit is a room controller designed to be the center of the smart home. Premium materials and a high-quality display with built-in sensors offer a wide range of applications.

The slim design of the product fits perfectly into the modern concept of today’s smart installations and architecture. The product can be used in both residential and commercial projects. The product has a modern, seamless user interface that provides an immersive experience every time it is used, with the display waking up simply by moving closer thanks to the proximity sensor.

The display has up to 9 screens that can display individual functions as widgets. This allows you to have different combinations of up to 6 widgets on each screen and effectively control all connected systems. You move between screens with a simple swipe, familiar from traditional smartphone use.

User Interface functions:
- Different UI theme style
- Screen saver
- Orientation indicator
- Proximity function triggered by object
- Setting the backlight in normal/night mode
- Setting the appearance of the screen

Main functions
- Brightness dimming
- RGB dimming
- RGBW dimming
- Colour temperature dimming
- Venetian blind position and slat
- Air conditioner control
- Room temperature control
- Ventilation control
- Audio control

HVAC controller functions:
- FCU controller: switching on/off (2-point control), switching PWM (PI control), continuous control (PI control)
- Floor heating controller
- Ventilation controller


General: Scene group function, 8 logic function channels (AND; OR, XOR, threshold comparator, format converter) each with 8 inputs

Power supply from KNX: DC 21-30 V approx. 24 V/3 mA
Auxiliary Power supply: DC 21-30 V approx. 24 V/85 mA
Screen: 10 cm (3.95") LCD, 480 x 480 pixels
Measuring accuracy: ±1 °C at 25 °C
IP protection rating: IP 20
Dimensions WxHxD: 86 x 86 x 32 mm
Accessories: Dismantling protection MTN6270-0000
Note: Programmable with ETS5 and higher.

SpaceLogic KNX

Room Temperature Control Units

Room temperature control unit System M



KNX Multitouch Pro



Version	Art. no.
	MTN6215-0310

For System M.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Note: Programmable with ETS4 and higher.
Contents: With bus connecting terminal and supporting plate.



Push-button 2-gang plus with room temperature control unit



Version		Art. no.
	white, glossy	**MTN6212-0344**
	polar white, glossy	**MTN6212-0319**
	active white, glossy	**MTN6212-0325**
	anthracite	**MTN6212-0414**
	aluminium	**MTN6212-0460**

For System M.
Convenient control unit with 4 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
With room temperature control unit and display.
With 5 red LEDs.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
The push-buttons are freely parameterisable as push-button pairs (dual-surface) or as single push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the push-buttons:

Switching, toggling, dimming, blind control (relative or absolute), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions, timed control with synchronisation, notification functions, the cyclic reading of external temperature values, fan control, operating modes, move setpoints.
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.

Scene function.

Operation: Menu.
Contents: With bus connecting terminal and supporting plate.
Screw for protection against dismantling.
With protective hood for plaster.



Push-button 4-gang plus with room temperature control unit



Version		Art. no.
	white, glossy	**MTN6214-0344**
	polar white, glossy	**MTN6214-0319**
	active white, glossy	**MTN6214-0325**
	anthracite	**MTN6214-0414**
	aluminium	**MTN6214-0460**

For System M.
Convenient control unit with 8 operating buttons, operating and status display and labelling field. The operating display can also be used as an orientation light.
With room temperature control unit and display.
With integrated piezoelectric buzzer to display alarm states and IR receiver. All functions of the respective buttons can be controlled via IR remote control.
With 9 red LEDs.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
The push-buttons are freely parameterisable as push-button pairs (dual-surface) or as single push-buttons.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the push-buttons:

Switching, toggling, dimming, blind control (relative or absolute), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions, timed control with synchronisation, notification functions, the cyclic reading of external temperature values, fan control, operating modes, move setpoints.
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.

Scene function.

Operation: Menu.
Transmitter: IR universal remote control MTN5761-0000
To be completed with: M-Smart frame, 2-gang without central bridge piece MTN4788.., M-Arc frame, 2-gang without central bridge piece MTN4858.., M-Star frame, 2-gang without central bridge piece MTN4668.., MTN4768.., MTN4868.., M-Plan frames, 2-gang without central bridge piece MTN4888.., MTN5158.., Metal frame, 2-gang without central bridge piece M-Elegance MTN4038.., Real glass frame, 2-gang without central bridge piece M-Elegance MTN4048..
Contents: With bus connecting terminal and supporting plate.
Screw for protection against dismantling.
With protective hood for plaster.



Room temperature control unit with display



Version		Art. no.
	white, glossy	**MTN6241-0344**
☐	polar white, glossy	**MTN6241-0319**
☐	active white, glossy	**MTN6241-0325**
■	anthracite	**MTN6241-0414**
■	aluminium	**MTN6241-0460**

For System M.
KNX Room temperature control unit with display, labelling field, operation and status LED. The 4 buttons allow to shift set values and change operation modes.
With 5 red LEDs.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.
Functions of the push-buttons:

Selection of 1- 4 operating modes each push-button. Move setpoint.
Accessories: Protective hood for plaster System M MTN627591
Contents: With bus connecting terminal and supporting plate.
Screw for protection against dismantling.
With protective hood for plaster.



KNX Room temperature control unit, flush-mounted/PI with 4-gang push-button interface



Version		Art. no.
	white, glossy	**MTN616744**
☐	polar white, glossy	**MTN616719**
☐	active white, glossy	**MTN616725**
■	anthracite	**MTN616814**
■	aluminium	**MTN616860**

For System M.
The device is a room temperature control unit and a binary input. Depending on the operating mode, the current temperature setpoint value and the room temperature, a control value for the heating or cooling control unit is transmitted to the KNX. The temperature can either be recorded by the internal or the external temperature sensor which must be connected to the push-button interface.
The push-button interface generates an internal signal voltage for connecting max. four conventional push-buttons or floating contacts. Of these, two inputs can be used to connect low current LEDs.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the room temperature control unit:
Controller type: 2-step control, continuous PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs

Operating modes: comfort, comfort extension, standby, night economy, frost/heat protection
Operation: Setpoint adjustment can be parameterised in the range with adjusting wheel; presence push-button functions can be parameterised/switched off
Valve protection, controller disable
Push-button interface functions:
Switching, dimming, external blinds, valuator (dimming valuator, extension unit for light scenes with/without memory function, temperature valuator, brightness valuator).
Push-button interface: up to 4 inputs, 2 of which can be used as outputs and one for connecting the remote sensor.
Output voltage: 5 V (SELV)
Output current: max. 0.8 mA
Max. cable length: Inputs/outputs max. 5 m, remote sensor max. 50 m
Accessories: Remote sensor for room temperature control unit UP/PI MTN616790



Remote sensor for room temperature control unit UP/PI



Version	Art. no.
black	**MTN616790**

Temperature sensor the floor/room temperature measurement
Cable length: 4 m (2 x 0.75 mm²)
To be completed with: KNX Room temperature control unit, flush-mounted/PI with 4-gang push-button interface
System M MTN6167.., MTN6168..



Room temperature control unit for properties



Version	Art. no.
white, glossy	**MTN6221-0344**
polar white, glossy	**MTN6221-0319**
active white, glossy	**MTN6221-0325**
anthracite	**MTN6221-0414**
aluminium	**MTN6221-0460**

For System M.
KNX room temperature control unit for properties with integrated bus coupler. Depending on the operating mode, the current temperature setpoint value and the actual room temperature, a control value for the heating or cooling control unit is transmitted to the KNX. The temperature can optionally be measured by the internal or by an external bus temperature sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. Operating mode, nominal value, control function settings made only via the bus The device does not have any operating and display elements.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.

Operation: only via bus telegrams.
Contents: With bus connecting terminal and supporting plate.
With protective hood for plaster.

SpaceLogic KNX

Room Temperature Control Units

Room temperature control unit System D



KNX Multitouch Pro



Version	Art. no.
	MTN6215-5910

For System D.
Comfortable room controller for controlling up to 32 room functions and the room temperature. All functions are displayed on a touch screen and are called up using simple finger movements. The user chooses from 3 interface designs that can be freely assigned to the room functions. The room temperature control can be shown in 2 different designs.
With room temperature control unit, display and connection for the remote sensor.
The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators.
ETS device functions:
- Switch-on behaviour of the user interface
- Proximity function: The display and the start screen only become visible when approached
- Gesture function: The device recognises a gesture (horizontal or vertical swipe movement) and triggers a function. In this way, the light can be switched on when you enter the room, for example.
- Cleaning mode: For a specific period of time, neither touches nor gestures are detected
- Adjusting the background lighting
- Setting the screen saver

With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Control unit/push-button:
Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams, pulse edges with 2-byte telegrams, 8-bit linear regulator, scene retrieval, scene saving, signal function, fan control, operating modes, setpoint adjustment
Functions of the room temperature control unit:
Controller type: 2-step controller, continuous-action PI control, switching PI control (PWM)
Output: continuous in the range 0 to 100% or switching ON/OFF
Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby (ECO), night reduction, frost/heat protection
Move all setpoints. Save all setpoint temperatures and operating modes when reset. External temperature monitoring. Additional output of the control value as 1 byte value on the PWM.
Signal function for the actual temperature, valve protection function.
Scene function.
Operation: Touch display
Accessories: Dismantling protection MTN6270-0000
Remote sensor for universal room temperature control unit with touch display MTN5775-0003
Fixing frame for 3-module box MTN6270-0015
D-Life frame, 1-gang, for 3-module box MTN6010-65xx
Note: Programmable with ETS4 and higher.
Contents: With bus connecting terminal and supporting plate.



Remote sensor for room temperature control unit UP/PI



Version	Art. no.
black	**MTN616790**

Temperature sensor the floor/room temperature measurement
Cable length: 4 m (2 x 0.75 mm²)
To be completed with: KNX Room temperature control unit, flush-mounted/PI with 4-gang push-button interface
System M MTN6167.., MTN6168..

Room temperature control unit Altira



KNX Room temperature control unit with display



Version	Art. no.	
white	**ALB45154**	**Discontinued**
aluminium	**ALB46154**	**Discontinued**

2 modules
In Altira design.
KNX Room temperature control unit with display and 4 buttons. 2 buttons allow to shift set values and change operation modes, the other 2 buttons are used for navigation in the menu. The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.
Functions of the push-buttons:

Selection of 1- 4 operating modes each push-button. Move setpoint.
Contents: With bus connecting terminal.

SpaceLogic KNX

Room Temperature Control Units

Room temperature control unit Unica



KNX Room temperature control unit with display



Version	Art. no.
☐ white	**MGU3.534.18**
ivory	**MGU3.534.25**

2 modules
In Unica design.
KNX Room temperature control unit with display and 4 buttons. 2 buttons allow to shift set values and change operation modes, the other 2 buttons are used for navigation in the menu. The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.
Functions of the push-buttons:

Selection of 1- 4 operating modes each push-button. Move setpoint.
Contents: With bus connecting terminal.

Room temperature control unit Unica Top



KNX Room temperature control unit with display



Version	Art. no.
aluminium	**MGU3.534.30**
graphite	**MGU3.534.12**

2 modules
In Unica Top design.
KNX Room temperature control unit with display and 4 buttons. 2 buttons allow to shift set values and change operation modes, the other 2 buttons are used for navigation in the menu. The room temperature control unit can be used for heating and cooling with infinitely adjustable KNX valve drives or to trigger switch actuators and heating actuators. With the white backlit display for showing e.g. the time, date, temperature and operating mode. Menu for setting default operating modes, setpoint value, working/non-working day (external trigger), display mode, time, switching times and brightness of the display.
With integrated bus coupler. The bus is connected using a bus connecting terminal.
KNX software functions:
Functions of the room temperature control unit:

Controller type: 2-step control, continuous PI controller, switching PI controller (PWM)

Output: continuous in the range 0 to 100% or switching ON/OFF

Controller mode:
- Heating with one controller output
- Cooling with one controller output
- Heating and cooling with separate controller outputs
- Heating and cooling with one controller output
- 2-step heating with 2 control outputs
- 2-step cooling with 2 control outputs
- 2-step heating and cooling with 4 control outputs

Operating modes: Comfort, comfort extension, standby, night reduction, frost/heat protection

Move all setpoints, save all setpoint temperatures and operating modes when reset, external temperature monitoring, additional output of the control value as 1 byte value on the PWM.

Monitoring function for the actual temperature, valve protection function.
Functions of the push-buttons:

Selection of 1- 4 operating modes each push-button. Move setpoint.
Contents: With bus connecting terminal.

SpaceLogic KNX

Room Temperature Control Units

Devices for individual room temperature control



KNX valve drive with status LED and 2 inputs



Version	Art. no.
	MTN6921-0001

EMO valve drive for heating valves. The device has 2 inputs for window contacts or presence detectors for instance.
Valve lift display via red LEDs. With automatic valve lift detection. The valve drive can be connected directly to the KNX. A separate power supply is not required. With integrated bus coupler.
Power consumption: max. 10 mA
Lift: max. 7,5 mm
Positioning force: 120 N
Type of protection: IP 21
Protection class: III as per EN 60730
Installation: Snaps onto the valve adapter
Dimensions: (H x Wx D) 82 x 50 x 65 mm
Contents: With 2 valve adapters (VA10/VA78).
Note: New Version (B) is available in Halogen and PVC free cable and housing.



SpaceLogic KNX Valve Drive Controller



Version	Art. no.
white	**MTN6730-0002**

For actuation of electrothermal valve drives for heating or cooling ceilings. The valve drive controller has 6 electronic outputs. Up to 4 valve drives (230 V AC) or 2 valve drives (24 V AC) can be connected to each output. Both de-energized closed and de-energized opened valve drives can be connected.

In addition, the valve drive controller contains 6 integrated room temperature controllers (RTC) which operate independently of each other. The correcting variable outputs of these RTCs can be linked internally with the valve outputs, so that temperature control and valve actuation can be performed by a single bus device only, if required. In this case, no external room temperature controller (e.g. push-button with RTC) is required.

As the valve outputs can be controlled individually, an external RTC can also be used at any time.

The integrated room temperature controllers can send the correcting variable telegram to the bus and thus control other heating actuators or fan coil actuators.

The outputs are either switch activated (1 bit) or PWM signal (1 byte) activated. Each output is overload-protected and short-circuit-protected.

All outputs can be operated manually using push-button operation. Building site operation is possible.

For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.

KNX software functions - valve: valve activation (deenergised opened / closed) can be configured for each output, actuator evaluation as “Switching, 1-bit”, “Constant, 1-byte” or “Constant 1-byte with actuator limiting value and hysteresis”, status feedback, collective feedback of all valve states via 4-byte telegram, combined valve status via 1 byte, failure signal of the valve operating voltage can be configured, overload and short-circuit signal for each valve output, automatic valve rinsing, summer/winter switch-over for valve outputs, valve command value limit, forced position configurable, activation of service mode with defined valve position

KNX software functions - RTC: operating modes “Heating”, “Cooling”, “Heating and Cooling” each with or without additional level, configuration of the temperature setpoints as relative (derived from basic setpoint) or absolute (independent setpoint temperatures for each operating mode), PI control, PWM or switching 2-point feedback control, automatic or object-oriented switch-over between “Heating” and “Cooling”, temporary or permanent setpoint shift through communication objects possible (e.g. via a controller extension), configurable step width of the setpoint shift (0.1 K / 0.5 K), calibration of the temperature values possible and measured value formation of the external sensors can be configured, separate or shared command value output in heating and cooling mode, floor temperature limit in heating mode, setpoint temperature limit in cooling mode, operating hours counter to record the switch-on times of the valve outputs

Nominal voltage: AC 110-230 V, 50/60 Hz
Outputs: 6, electronic AC 24 V / 230 V
Switching current: 5 ... 160 mA
Switch-on current AC 230 V: max. 1.5 A (2 s)
Switch-on current AC 24 V: max. 0.3 A (2 min)
Number of valve drives: max. 4 per output (230 V drives)
max. 2 per output (24 V drives)
Power consumption KNX: max. 250 mW
Device width: 4 modules = approx. 72 mm
Accessories: Thermoelectric valve drive 230 V MTN639125
Thermoelectric valve drive 24 V MTN639126
Contents: With bus connecting terminal and cable cover.



SpaceLogic KNX Fan Coil 0-10 V Controller



Version	Art. no.
white	**MTN6730-0003**

For heating, ventilation and air conditioning control. For controlling fan coils with up to three fan stages, optionally also with 0-10 V fan control, as well as for the control of proportional 0-10 V valves. The controller supports 2-pipe and 4-pipe systems.

The controller can measure and control the room temperature itself or receives the value from the Push-Button plus with TCU and behaves like an actuator.
One floating contact for window contacts or temperature sensor and one for condensate monitoring (e.g.).
Auxiliary relay for electric heating or cooling registers
Manual operation on the controller (fan speeds, switching between heating and cooling)
Adjustment of setpoint for cooling depending on outdoor temperature
Floating contact optionally for cooling or heating coil
With emergency program

With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.

KNX software functions: Fan control:
Standard fan coil or fan coil with 0-10 V is supported. In automatic mode, the fan speeds are controlled dependently by the control value of the push-button plus with TCU. The three fan speeds and automatic mode can be switched via telegram. The fan can be controlled either directly or via actuators / suitable dimming actuators. Fan speed feedback is possible via corresponding status feedback objects e.g. status LED of a push-button.

Valve control:
Type of controller: P / PI controller
Controller mode: Heating and/or cooling with common or separate valve outputs.
Operating modes: Operating modes can be selected by object

Power supply: AC 100-240 V, 50-60 Hz
Power consumption: max. 1.7 W, stand-by <0.5 W
Minimum load additional/fan relay: 12 V, 100 mA

Outputs:
Additional relay switching capacity: 16 A
Fan relay switching capacity: 6 A
Fan and valves: 0-10 V, max. 10 mA

Inputs: 2, max. cable length 5 m
Operation: Key for fan levels and heating/cooling mode
Displays: 9 status LEDs
Device width: 4 modules = approx. 72 mm
Accessories:
Push-button 2-gang plus with room temperature control unit System M MTN6212-03.. /-04..,
Push-button 4-gang plus with room temperature control unit System M MTN6214-03.. /-04..,
KNX Multitouch Pro System M MTN6215-03.., System D MTN6215-59.., System D MTN6216-5910

Room Temperature Control Units



SpaceLogic KNX Fan coil actuator REG-K



Version	Art. no.
light grey	**MTN645094**

For heating, ventilation and air conditioning control. For controlling fan convectors with up to three speeds, as well as for controlling three-step motor drives (continuous/pulse-width-modulated) or two-step thermal drives. The actuator supports 2-pipe and 4-pipe systems.
Two floating binary inputs for window contact and level contact for condensed water container, for example. Connection of 1-speed to 3-speed fans. The push-button plus with room temperature control can be used to activate the fan coil actuator.
With integrated bus coupler. For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Fan control:
In automatic mode, the fan speeds are controlled dependently by the control value of the push-button plus. The three fan speeds and automatic mode can be switched via EIB telegram. The fan can be controlled either directly or via actuators / suitable dimming actuators.
Fan speed feedback is possible via corresponding status feedback objects e.g. status LED of the push-button. The fan speed as well as the automatic status “(Auto)" can be displayed on the display of the push-button plus with TCU.
Valve control:
Type of controller: PI controller (PWM and continuous).
Controller mode: Heating and/or cooling with common or separate valve outputs.
Operating modes: The operating mode is selected in the push-button plus with TCU.
Power supply: AC 230 V ±10 %, 50/60 Hz
Power consumption: max. 3 VA
Outputs: 3 floating contacts (fan coil), 2 semi-conductor switches (valve connections)
Switching capacity for valves: 0.5 A, AC 24V - 230 V
Additional relay switching capacity: 16 A
Fan relay switching capacity: 8 A
Inputs: 2, max. cable length 5 m
Operation: Key for fan levels and heating/cooling mode
Displays: 9 status LEDs
Device width: 4 modules = approx. 72 mm
Accessories: Thermoelectric valve drive 230 V MTN639125, Thermoelectric valve drive 24 V MTN639126, Push-button 2-gang plus with room temperature control unit System M MTN6212-03.. /-04.., Push-button 4-gang plus with room temperature control unit System M MTN6214-03.. /-04..

Room Temperature Control Units



SpaceLogic KNX Heating actuator REG-K/6x24/230/0.16A




Version	Art. no.
	MTN6730-0001

For actuation of thermoelectric valve drives for heating or cooling ceilings. The heating actuator has 6 electronic outputs. Up to 4 valve drives can be connected to each output. The outputs are either switch activated (1 bit) or PWM signal (1 byte) activated. Each output is overload-protected and short-circuit-protected.
All outputs can be operated manually using push-button operation. Building site operation is possible.
For installation on DIN rails TH35 according to EN 60715. The bus is connected using a bus connecting terminal.
KNX software functions: Characteristics of valve drive (de-energised open/closed), PWM cycle time per channel, valve protection function per channel, cyclical monitoring of the control value per channel, operating hours counter, status indication per channel (nominal value, short circuit, overload, valve protection active, service mode, manual operation active, priority control active), summer and winter mode, locking each output in a forced position, behaviour on bus voltage failure and recovery, mains failure signal, group feedback, transmission of the largest 1 byte variable value.
Nominal voltage: AC 110-230 V, 50/60 Hz
Outputs: 6, electronic AC 24 V / 230 V
Nominal current: 0.05 ... 0.16 A, ohmic
Switch-on current: max. 1.5 A (2 s)
Minimum load per used output: 1 valve drive
Number of valve drives: max. 4 per output (230 V drives)
max. 2 per output (24 V drives)
Device width: 4 modules = approx. 72 mm
Accessories: Thermoelectric valve drive 230 V MTN639125
Thermoelectric valve drive 24 V MTN639126
Contents: With bus connecting terminal and cable cover.



KNX heating actuator FM with 3 inputs




Version	Art. no.
	MTN6003-0005

1-gang heating actuator with three inputs for installation in a size 60 switch box. Floating contacts can be connected to the inputs.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Heating actuator function:
Can be controlled by a control value (1 bit or 1 byte). Status indication (1 bit or 1 byte).
Valve control (de-energised open/closed). Summer or winter mode can be selected. Cyclical monitoring of control value. Emergency mode and alarm signal. Priority control (forced setting for summer and winter mode with different values). Behaviour when bus voltage recovers and fails. Overload or short circuit signal. Control of the valve drives (switching or via PWM). Function to protect valves from sticking.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object.
Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Nominal voltage: AC 230 V, 50/60 Hz
Switch contact: Triac
Nominal current: 5 to 25 mA, max. 2 valve drives
Inputs: 3
Temperature range: -5 °C to 45 °C
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)



KNX blind and heating actuator with 3 inputs



Version	Art. no.
	MTN6003-0006

1-gang blind actuator and 1-gang heating actuator with three inputs for installation in a size 60 switch box. Floating contacts can be connected to the inputs.
The inputs have already been assigned to the actuator at the factory, enabling operation without programming.
Connection to 230 V via a flexible cable, approx. 20 cm long. The inputs and the KNX are connected via a 6-core, approx. 30 cm long, connecting cable. The connecting cable for the inputs can be extended to a max. of 5 m.
KNX software functions: Blind actuator function:
Operation mode: Blinds, roller shutters, awnings or ventilation flaps. Raising or lowering times with extension for the upper limit position. Status feedback of the position or of the slat position. Active/passive status feedback, cycl. status feedback function. Up to 5 safety functions (3 wind alarms, 1 rain alarm, 1 frost alarm). Cycl. monitoring. Sun protection function with fixed and variable positions. Shading controls with heating/cooling automatic mode and presence function. Behaviour when bus voltage fails/recovers. Status feedback delay after bus voltage recovery. Priority function. 8 Scene function. Memory function for scenes.
Heating actuator function:
Can be controlled by a control value (1 bit or 1 byte). Status indication (1 bit or 1 byte).
Valve control (de-energised open/closed). Summer or winter mode can be selected. Cyclical monitoring of control value. Emergency mode and alarm signal. Priority control (forced setting for summer and winter mode with different values). Behaviour when bus voltage recovers and fails. Overload or short circuit signal. Control of the valve drives (switching or via PWM). Function to protect valves from sticking.
Input function:
Free assignment of the switching, dimming, blind and valuator functions. Locking object.
Behaviour when bus voltage recovers.
Switching: two switch objects per input. Command on rising/falling edge (ON, OFF, TOGGLE, no reaction).
Dimming: Single surface and dual-surface operation. Time between dimming and switching and dim step values. Telegram repetition and send stop telegram.
Blinds: Command on rising edge (none, UP, DOWN, TOGGLE), Operation concept (Step - Move - Step or Move - Step). Time between short and long operation. Slat adjustment time.
Valuator and Scene ext. input: Edge (push-button as make contact, push-button as break contact, switch) and value on edge. Value adjustment via long push-button action for valuator.
Scene ext. unit with memory function.
Nominal voltage: AC 230 V, 50/60 Hz
Blind output
Switching current: 3 A, AC1
Nominal output
Motor: AC 230 V, 600 VA
Heating output
Switch contact: Triac
Nominal current: 5 to 25 mA, max. 2 valve drives
Inputs: 3
Temperature range: -5 °C to 45 °C
Type of protection: IP 20
Dimensions: 53x53x28 (WxHxD)
Note: For installation in a double box or an electronic box (Kaiser). There must be a minimum gap of 4mm between the 230V connection and the connection for the KNX/Inputs (SELV)



Thermoelectric valve drive 230 V



Version	Art. no.
polar white	**MTN639125**

Thermoelectric valve drive for opening and closing valves. For 2-step or PWM control of heating, air conditioning and ventilation systems, individual room control of surface heaters, control of heating circuit distributors, radiators, convector heaters, cooling ceilings. Operation is carried out by the heating actuator REG-K/6x24/230/0.16A, fan coil actuator REG-K or a room temperature control unit (230 V) with 2-step or PWM output.
Valve adapters permit compatibility with a variety of valve bodies and heating circuit distributors.

- First-open function: The drive is factory-set to de-energised open. This allows the heating to be operated during the building shell phase.
- De-energised closed
- Functional display (open, closed, intermediate settings)
- Adjustment control
- Plug-in connecting cable
- Plug-in assembly

Supply voltage: AC 230 V, 50/60 Hz
Starting current: max. 350 mA for max. 100 ms
Power consumption: 1 W
Lift: approx. 4 mm
Running time: 3.5 min for 4 mm
Positioning force: 100 N ± 5 %
Circulating medium temperature: 0-100°C
Type of protection: IP 54 / II, in all installation positions
Connecting cable: 1 m, 2x0.75 mm² pluggable
Dimensions: 59.2x44.3x56 mm (HxWxD)
To be completed with: Room temperature control insert with switch MTN536302/04
In KNX, to be completed with: SpaceLogic KNX Heating actuator REG-K/6x24/230/0.16A MTN6730-0001
SpaceLogic KNX Fan coil actuator REG-K MTN645094
KNX heating actuator FM with 3 inputs MTN6003-0005
KNX blind and heating actuator with 3 inputs MTN6003-0006
Accessories: Valve adapter VA50 for thermoelectric valve drive MTN639150
Valve adapter VA78 for thermoelectric valve drive MTN639178
Valve adapter VA80 for thermoelectric valve drive MTN639180



Thermoelectric valve drive 24 V



Version	Art. no.
polar white	**MTN639126**

Thermoelectric valve drive for opening and closing valves. For 2-step or PWM control of heating, air conditioning and ventilation systems, individual room control of surface heaters, control of heating circuit distributors, radiators, convector heaters, cooling ceilings. Operation is carried out by the heating actuator REG-K/6x24/230/0.16A, fan coil controller REG-K or a room temperature control unit (24 V) with 2-step or PWM output.
Valve adapters permit compatibility with a variety of valve bodies and heating circuit distributors.

- First-open function: The drive is factory-set to de-energised open. This allows the heating to be operated during the building shell phase.
- De-energised closed
- Functional display (open, closed, intermediate settings)
- Adjustment control
- Plug-in connecting cable
- Plug-in assembly

Supply voltage: AC/DC 24 V +20%/-10%, 0-60 Hz
Starting current: < 300 mA for max. 2 min
Power consumption: 1 W
Lift: approx. 4 mm
Running time: 3.5 min for 4 mm
Positioning force: 100 N ± 5%
Medium temperature: 0-100°C
Type of protection/protection class: IP 54 / II, in all installation positions
Connecting cable: 1 m, 2x0.75 mm² pluggable
Dimensions: 59.2 x 44.3 x 56 mm (HxWxD)
To be completed with: Room temperature control insert with switch MTN536302/04
SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
In KNX, to be completed with: SpaceLogic KNX Heating actuator REG-K/6x24/230/0.16A MTN6730-0001 SpaceLogic KNX Fan coil actuator REG-K MTN645094
SpaceLogic KNX Power supply REG, AC 24 V/1 A MTN663529
Accessories: Valve adapter VA50 for thermoelectric valve drive MTN639150
Valve adapter VA78 for thermoelectric valve drive MTN639178
Valve adapter VA80 for thermoelectric valve drive MTN639180

Room Temperature Control Units





Valve adapter VA50 for thermoelectric valve drive



Version	Art. no.
	MTN639150

For Honeywell+Braukmann, Reich, Landis+Gyr, MNG, Cazzagniga. Valve adapters permit compatibility with a variety of valve bodies and heating circuit distributors
To be completed with: Thermoelectric valve drive 230 V MTN639125, Thermoelectric valve drive 24 V MTN639126

Valve adapter VA78 for thermoelectric valve drive



Version	Art. no.
	MTN639178

For Danfoss RA.
Valve adapters permit compatibility with a variety of valve bodies and heating circuit distributors
To be completed with: Thermoelectric valve drive 230 V MTN639125, Thermoelectric valve drive 24 V MTN639126



Valve adapter VA80 for thermoelectric valve drive



Version	Art. no.
	MTN639180

For Heimeier, Herb, Onda, Schlösser (from 1993), Oventrop M30x1.5, TeSa.
Valve adapters permit compatibility with a variety of valve bodies and heating circuit distributors
To be completed with: Thermoelectric valve drive 230 V MTN639125, Thermoelectric valve drive 24 V MTN639126

Accessories

Power supplies



SpaceLogic KNX Power supply REG, 24 V DC / 0.4 A

Version	Art. no.
light grey	**MTN693003**

Power supply for 24 V binary inputs.
For installation onto DIN rails EN 50022.
With integrated overload and short-circuit protection.
For installation on DIN rails TH35 according to EN 60715.
Primary supply: AC 230 V, 48-63 Hz
Output voltage: DC 24 V +/- 3 %
Output current: max. 0.4 A
Output power: max. 10 W
Device width: 1 module = approx. 18 mm
For supplying power to: Binary input REG-K/4x24 MTN644892, Binary input REG-K/8x24 MTN644792, KNX/IP router REG-K MTN680329



SpaceLogic KNX Power supply REG, AC 24 V/1 A



Version	Art. no.
light grey	**MTN663529**

Power supply for 24 V binary inputs, weather station REG-K/4-gang, analogue input module REG-K/4-gang, rain sensor, wind sensor with 0 - 10 V interface and heating, KNX/IP router REG-K.
With fuse.
For installation on DIN rails TH35 according to EN 60715.
Primary supply: AC 230 V, +/- 10 %, 50-60 Hz
Output voltage: AC 24 V
Output current: max. 1 A
Fuse: 5x20 mm, 250 V, T 160 mA
Device width: 5 modules = approx. 90 mm
For supplying power to: Binary input REG-K/8x24 MTN644792, SpaceLogic KNX Weather station REG-K/4-gang MTN682991, Rain sensor MTN663595, Wind sensor with 0-10 V interface and heating MTN663592, KNX/IP router REG-K MTN680329, Thermoelectric valve drive 24 V MTN639126
Contents: With spare fuse.

Index

A

ALB45150 115
ALB45151 115
ALB45152 115
ALB45153 133
ALB45154 228
ALB46150 115
ALB46151 115
ALB46152 115
ALB46153 133
ALB46154 228

C

CCT15860 154
CCT15861 154

L

LSS100100 65
LSS100200 67
LSS100300 25, 68
LSS100400 24, 69
LSS100410 24, 69
LSS900100 47

M

MGU3.530.12 118
MGU3.530.18 117
MGU3.530.25 117
MGU3.530.30 118
MGU3.531.12 118
MGU3.531.18 117
MGU3.531.25 117
MGU3.531.30 118
MGU3.532.12 118
MGU3.532.18 117
MGU3.532.25 117
MGU3.532.30 118
MGU3.533.12 134
MGU3.533.18 133
MGU3.533.25 133
MGU3.533.30 134
MGU3.534.12 230
MGU3.534.18 229
MGU3.534.25 229
MGU3.534.30 230
MTN5761-0000 57
MTN5775-0003 75, 81, 100
MTN6003-0001 162
MTN6003-0002 163
MTN6003-0003 212
MTN6003-0004 186
MTN6003-0005 236
MTN6003-0006 187, 237
MTN6003-0011 161
MTN6003-0012 185
MTN6003-0013 211
MTN6005-0001 146
MTN6005-0011 145
MTN6010-6534 101
MTN6010-6535 101
MTN6010-6536 101
MTN6180-0319 80
MTN6180-0325 80
MTN6180-0414 80
MTN6180-0460 80
MTN6180-6033 96
MTN6180-6034 96
MTN6180-6035 96
MTN6180-6036 96
MTN6180-6050 96
MTN6180-6051 96
MTN6180-6052 96
MTN6181-6035 97
MTN6185-0319 79
MTN6185-0325 79
MTN6185-0414 79
MTN6185-0460 79
MTN6185-6033 95
MTN6185-6034 95
MTN6185-6035 95
MTN6185-6036 95
MTN6185-6050 95
MTN6185-6051 95
MTN6185-6052 95
MTN6191-6010 28, 90
MTN6191-6034 31, 93
MTN6191-6035 31, 93
MTN6191-6036 31, 93
MTN6191-6050 31, 93
MTN6191-6052 31, 93
MTN6192-6010 29, 91
MTN6192-6034 32, 94
MTN6192-6035 32, 94
MTN6192-6036 32, 94
MTN6192-6050 32, 94
MTN6192-6052 32, 94
MTN6193-6010 30, 92
MTN6193-6034 32, 94
MTN6193-6035 32, 94
MTN6193-6036 32, 94
MTN6193-6050 32, 94
MTN6193-6052 32, 94
MTN6194-6010 31, 93
MTN6194-6034 32, 94
MTN6194-6035 32, 94
MTN6194-6036 32, 94
MTN6194-6050 32, 94
MTN6194-6052 32, 94
MTN6212-0319 85, 222
MTN6212-0325 85, 222
MTN6212-0344 85, 222
MTN6212-0414 85, 222
MTN6212-0460 85, 222
MTN6214-0319 86, 223
MTN6214-0325 86, 223
MTN6214-0344 86, 223
MTN6214-0414 86, 223
MTN6214-0460 86, 223
MTN6215-0310 72, 81, 221
MTN6215-0410 27, 71, 78, 220
MTN6215-5910 73, 99, 227
MTN6216-5910 75, 100
MTN6221-0319 226
MTN6221-0325 226
MTN6221-0344 226
MTN6221-0414 226
MTN6221-0460 226
MTN6241-0319 224
MTN6241-0325 224
MTN6241-0344 224
MTN6241-0414 224
MTN6241-0460 224
MTN6260-7760 26, 70
MTN6260-7770 26, 70
MTN6270-0000 74, 82, 98
MTN6270-0010 80
MTN6270-0011 97
MTN6270-0015 101
MTN6300-0001 141
MTN6300-0002 141
MTN6300-0019 135
MTN6302-6033 132
MTN6302-6034 132
MTN6302-6035 132
MTN6302-6036 132
MTN6302-6050 132
MTN6302-6051 132
MTN6302-6052 132
MTN6303-0019 140
MTN6304-0019 136
MTN6305-0019 137
MTN6354-0019 138
MTN6355-0019 139
MTN6500-0101 54
MTN6500-0103 54
MTN6502-0101 55, 61
MTN6502-0105 55, 61
MTN6503-0201 60
MTN6513-1201 50
MTN6513-1202 49
MTN6513-1203 49
MTN6600-0603 59
MTN6604-0001 149
MTN6606-0008 153
MTN6606-0070 154
MTN6606-0073 153
MTN6700-0002 164
MTN6700-0004 167
MTN6700-0008 173
MTN6700-0012 176
MTN6700-0104 40, 192
MTN6700-0108 41, 193
MTN6700-0116 42, 194
MTN6700-0124 43, 195
MTN6700-0304 44, 196
MTN6700-0308 45, 197
MTN6700-0312 46, 198
MTN6705-0008 171, 188
MTN6710-0002 207
MTN6710-0004 208
MTN6710-0102 204
MTN6725-0001 216
MTN6725-0003 217
MTN6725-0004 218
MTN6725-0101 215
MTN6730-0001 235
MTN6730-0002 232
MTN6730-0003 233
MTN6805-0008 172, 189
MTN6810-0102 205
MTN6903-6014 76
MTN6903-6019 76
MTN6903-6060 76
MTN6903-6114 77
MTN6903-6119 77
MTN6903-6160 77
MTN6903-6214 77
MTN6903-6219 77
MTN6903-6260 77
MTN6903-6300 76
MTN6903-6301 76
MTN6904-0001 147
MTN6904-0002 147
MTN6921-0001 231
MTN6940-0000 172, 189, 206
MTN6941-0001 172, 189, 206
MTN6941-0002 172, 189, 206
MTN296019 62
MTN296025 62
MTN296044 62
MTN297914 62
MTN297960 62
MTN550619 143
MTN616719 225
MTN616725 225
MTN616744 225
MTN616790 225, 228
MTN616814 225
MTN616860 225
MTN617119 82
MTN617125 82
MTN617144 82
MTN617219 82
MTN617225 82
MTN617244 82
MTN617419 83
MTN617425 83
MTN617444 83
MTN617519 83
MTN617525 83
MTN617544 83
MTN618319 83
MTN618320 83
MTN618419 83
MTN618420 83
MTN619119 87
MTN619125 87
MTN619144 87
MTN619219 88
MTN619225 88
MTN619244 88
MTN619319 87
MTN619325 87
MTN619344 87
MTN619419 87
MTN619425 87
MTN619444 87
MTN619519 88
MTN619525 88
MTN619544 88
MTN619619 88
MTN619625 88
MTN619644 88
MTN619719 88
MTN619725 88
MTN619744 88
MTN625114 87
MTN625160 87
MTN625199 87
MTN625214 88
MTN625260 88
MTN625299 89
MTN625414 87
MTN625460 87
MTN625514 87
MTN625560 87
MTN625614 88
MTN625660 88
MTN625714 88
MTN625760 88
MTN625814 88
MTN625860 88
MTN627514 82
MTN627560 82
MTN627591 84
MTN627614 82
MTN627660 82
MTN627814 83
MTN627860 83
MTN627914 83
MTN627960 83
MTN629993 160
MTN630419 144
MTN630425 144
MTN630444 144
MTN630614 144
MTN630660 144
MTN630719 142
MTN630760 142
MTN630819 142
MTN630860 142
MTN630919 143
MTN630960 143
MTN631619 131
MTN631625 131
MTN631644 131
MTN631719 131
MTN631725 131
MTN631744 131
MTN632515 130
MTN632519 130
MTN632569 130
MTN632614 131
MTN632660 131
MTN632714 131
MTN632760 131
MTN639125 238
MTN639126 239
MTN639150 240
MTN639178 240
MTN639180 240
MTN639190 130
MTN644492 123
MTN644592 123
MTN644692 125
MTN644792 124
MTN644892 124
MTN644992 125
MTN645094 234
MTN646704 183
MTN646808 170
MTN646991 214
MTN647091 213
MTN647393 165
MTN647395 166
MTN647593 168
MTN647595 169
MTN647893 174
MTN647895 175
MTN648493 177
MTN648495 178
MTN648704 182
MTN649202 164
MTN649204 167
MTN649208 170
MTN649212 176
MTN649310 210
MTN649315 209
MTN649350 209
MTN649704 183

SpaceLogic KNX

Index

Index

MTN649802 182
MTN649804 184
MTN649808 184
MTN649908 171, 172, 188, 189, 190, 204, 205, 206, 232
MTN649912 191
MTN663529 241
MTN663591 150
MTN663592 150
MTN663593 152
MTN663594 152
MTN663595 151
MTN663596 151
MTN663692 149
MTN663991 145
MTN668091 155
MTN668990 52
MTN668991 52
MTN670802 122
MTN670804 122
MTN676090 58
MTN677290 155
MTN680204 56
MTN680329 56
MTN681799 62
MTN681829 61
MTN682191 152
MTN682291 219
MTN682991 148
MTN683832 50
MTN683890 51
MTN683901 52
MTN684032 50
MTN684064 51
MTN689701 57
MTN689702 57
MTN693003 241

N

NP16161_01BK_E1 33, 102
NP16161_01MS 109
NP16161_01SL 109
NP16161_01SL_E1 33, 102
NP16161_01WG 109
NP16161_01WG_E1 33, 102
NP16162_01BK_E1 34, 103
NP16162_01MS 110
NP16162_01SL 110
NP16162_01SL_E1 34, 103
NP16162_01WG 110
NP16162_01WG_E1 34, 103
NP16163_01BK_E1 35, 104
NP16163_01MS 111
NP16163_01SL 111
NP16163_01SL_E1 35, 104
NP16163_01WG 111
NP16163_01WG_E1 35, 104
NP16164_01BK_E1 36, 105
NP16164_01MS 112
NP16164_01SL 112
NP16164_01SL_E1 36, 105
NP16164_01WG 112
NP16164_01WG_E1 36, 105
NP16212_01BK_E1 37, 106
NP16212_01MS 113
NP16212_01SL 113
NP16212_01SL_E1 37, 106
NP16212_01WG 113
NP16212_01WG_E1 37, 106
NP16214_01BK_E1 38, 107
NP16214_01MS 114
NP16214_01SL 114
NP16214_01SL_E1 38, 107
NP16214_01WG 114
NP16214_01WG_E1 38, 107
NP16260_0104 39, 108
NU553018 116
NU553020 116
NU553030 116
NU553054 116
NU553118 116
NU553120 116
NU553130 116
NU553154 116

* Make the most of your energy

LSB02779_EN 11.2023 © Schneider Electric - All rights reserved

Schneider Electric Industries SAS
35 rue Joseph Monier
92500 Rueil-Malmaison
France
www.schneider-electric.com

This document has been printed on ecological paper

Publishing: Schneider Electric Industries SAS
Design: Breitbanddesign AG
Illustrations: Breitbanddesign AG
Photos: Constantin Meyer Photographie, Divis
Photo location: Office Kassel & Residential Cologne, Germany